

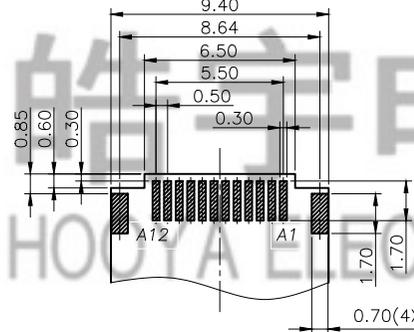
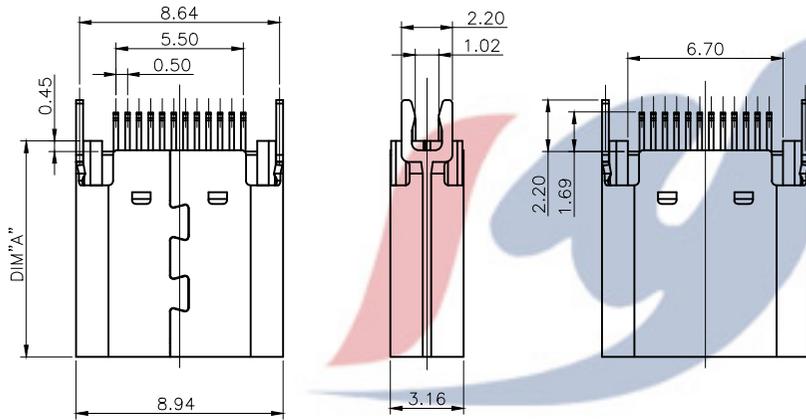
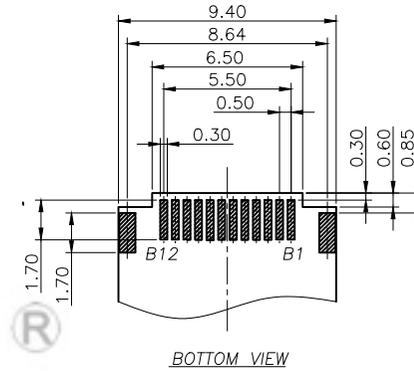
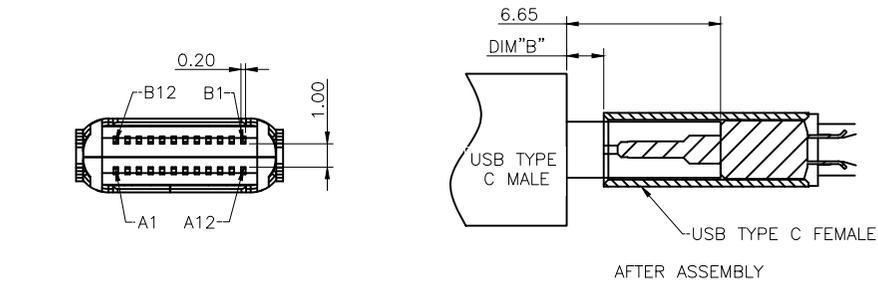


USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

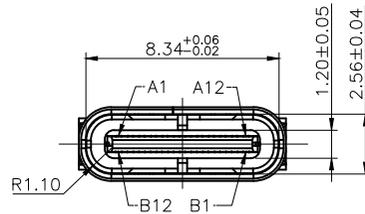

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.8.0±0.05MM;DEFAULT TOLERANCE:±0.05



注: B:胶舌为黑色
SU:外壳材质为不锈钢

				TOLERANCE UNLESS SPECIFIED								
				UP TO 5mm: ±0.1	ANGULAR	1						
				ABOVE 5mm: ±0.2	±1°	NO	DATE	REVISIONS		BY	APPD	
4	FRONT SHELL	SUS	1			TITLE: USB JACK		UNIT : MM	ROHS COMPLIANT	DWN		
3	MIDDLE PLATE	SUS	1	Ni-PLATED		MODEL: USB-307HF-B-SU		SCALE: 1:1	CHK'D			
2	CONTACT	PHOSPHOR BRONZE	12	Au/Ni-PLATED		HAOYU(HONGKONG)LIMITED		APPD				
1	HOUSING	LCP(UL94V-0)	1			皓宇(香港)有限公司		PRO.AGL:		REV :A0		
NO.	PART NAME	MATERIAL	QTY	FINISHING								