

3-Electrode Gas Discharge Tube (GDT)

SC3E6 Series

Description

Gas discharge Tubes (GDT) are classical components for protecting the installations of the telecommunications. It is essential that IT and telecommunications systems -with their high-grade but sensitive electronic circuits - be protected by arresters. They are thus fitted at the input of the power supply system together with varistors and at the connection points to telecommunication lines. They have become equally indispensable for protecting base stations in mobile telephone systems as well as extensive cable television (CATV) networks with their repeaters and distribution systems.

These protective components are also indispensable in other sectors, In AC power transmission systems, they are often used with current-limiting varistors, In customer premises equipment such as DSL modems, WLAN routers, TV sets and cable modems In air-conditioning equipment, the integral black-box concept offers graduated protection by combining arresters with varistors, PTC, diodes and inductor.


Features

- ◆ Non-Radioactive
- ◆ RoHS compliant
- ◆ Low insertion loss
- ◆ Excellent response to fast rising transients
- ◆ Ultra low capacitance
- ◆ 10KA surge capability tested with 8/20µs pulse as defined by IEC 61000-4-5


Applications

- ◆ Communication equipment
- ◆ CATV equipment
- ◆ Test equipment
- ◆ Data lines
- ◆ Power supplies
- ◆ Telecom SLIC protection
- ◆ Broadband equipment
- ◆ ADSL equipment, including ADSL2+
- ◆ XDSL equipment
- ◆ Satellite and CATV equipment
- ◆ Consumer electronics


SC3E6-XXXMM



SC3E6-XXXM



Schematic Symbol



a = Tip
b = Ring
e = Ground
(center electrode)

Agency Approvals

| AGENCY | AGENCY FILE NUMBER |
|--|--------------------|
|  | E341061 |

Product Characteristics


| | | |
|-------------------------------------|--|--------|
| Materials | Nickel-plated with Tinplated wires | |
| Product Marking | SOCAY XXXM XXX -Nominal voltage M -10KA | |
| Glow to Arc Transition Current | ~1 Amps | |
| Glow Voltage | ~70 Volts | |
| Storage and Operational Temperature | -40 to +90°C | |
| Weight | SC3E6-XXXMM | ~1.30g |
| | SC3E6-XXXM | ~1.15g |
| Climatic category (IEC 60068-1) | 40/ 90/ 21 | |

3-Electrode Gas Discharge Tube (GDT)


SC3E6 Series

Dimensions (Unit: mm)

Radial Leaded Devices (SC3E6-XXXMM)

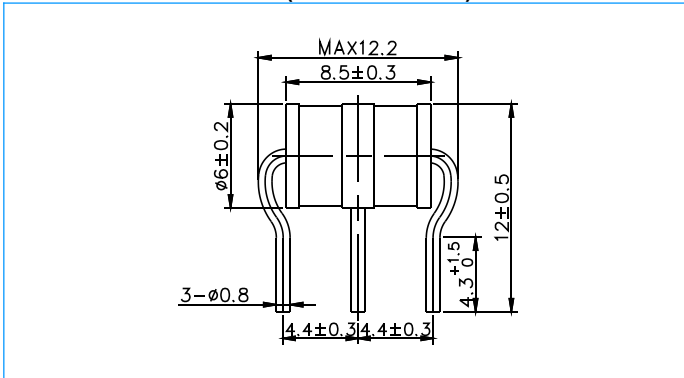

Without wire Devices (SC3E6-XXXM)

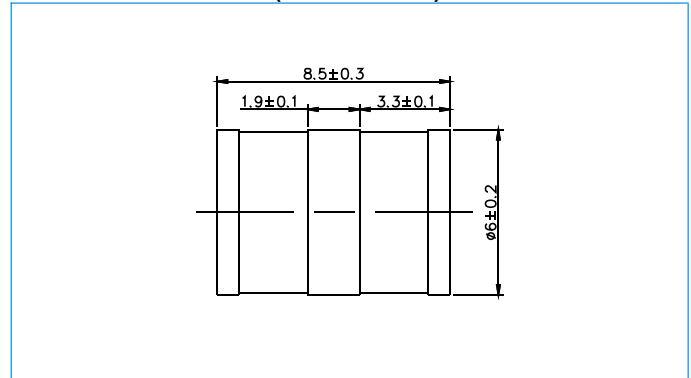

Electrical Characteristics

| Part Number | Marking | DC Spark-over Voltage | Maximum Impulse Spark-over Voltage | | Minimum Insulation Resistance | Maximum Capacitance | Arc Voltage | Service Life | | | | |
|---------------------------|---------------|-----------------------|------------------------------------|----------|-------------------------------|---------------------|-------------|--------------|-----------------------------------|-------------------------------|---------------------------------------|--------------|
| | | | @100V/μs | @100V/μs | | | | @1KV/μs | Nominal Impulse Discharge Current | Max Impulse Discharge Current | Nominal Alternating Discharge Current | Impulse Life |
| | | | | | | | | | | | | |
| SC3E6-75MM SC3E6-75M | SOCAY 75M | 75V±20% | <500V | <600V | 1 GΩ (at 25V) | <1.5pF | ~15V | 10KA | 20KA | 10A | 200A | |
| SC3E6-90MM SC3E6-90M | SOCAY 90M | 90V±20% | <500V | <600V | 1 GΩ (at 50V) | <1.5pF | ~15V | 10KA | 20KA | 10A | 200A | |
| SC3E6-150MM SC3E6-150M | SOCAY 150M | 150V±20% | <500V | <600V | 1 GΩ (at 50V) | <1.5pF | ~20V | 10KA | 20KA | 10A | 200A | |
| SC3E6-230MM SC3E6-230M | SOCAY 230M | 230V±20% | <600V | <700V | 1 GΩ (at 100V) | <1.5pF | ~20V | 10KA | 20KA | 10A | 200A | |
| SC3E6-250MM SC3E6-250M | SOCAY 250M | 250V±20% | <600V | <700V | 1 GΩ (at 100V) | <1.5pF | ~20V | 10KA | 20KA | 10A | 200A | |
| SC3E6-300MM SC3E6-300M | SOCAY 300M | 300V±20% | <800V | <900V | 1 GΩ (at 100V) | <1.5pF | ~20V | 10KA | 20KA | 10A | 200A | |
| SC3E6-350MM SC3E6-350M | SOCAY 350M | 350V±20% | <800V | <900V | 1 GΩ (at 100V) | <1.5pF | ~20V | 10KA | 20KA | 10A | 200A | |
| SC3E6-420MM SC3E6-420M | SOCAY 420M | 420V±20% | <900V | <1000V | 1 GΩ (at 100V) | <1.5pF | ~20V | 10KA | 20KA | 10A | 200A | |
| SC3E6-470MM SC3E6-470M | SOCAY 470M | 470V±20% | <900V | <1000V | 1 GΩ (at 100V) | <1.5pF | ~20V | 10KA | 20KA | 10A | 200A | |
| SC3E6-600MM SC3E6-600M | SOCAY 600M | 600V±20% | <1100V | <1200V | 1 GΩ (at 100V) | <1.5pF | ~20V | 10KA | 20KA | 10A | 200A | |


Notes:

- Terms in accordance with ITU-T K.12 and GB/T 9043-2008
- At delivery AQL 0.65 level II, DIN ISO 2859
- Tip or ring electrode to center electrode
- Total current through center electrode, half value through tip respectively ring electrode



3-Electrode Gas Discharge Tube (GDT)

SC3E6 Series

Electrical Rating
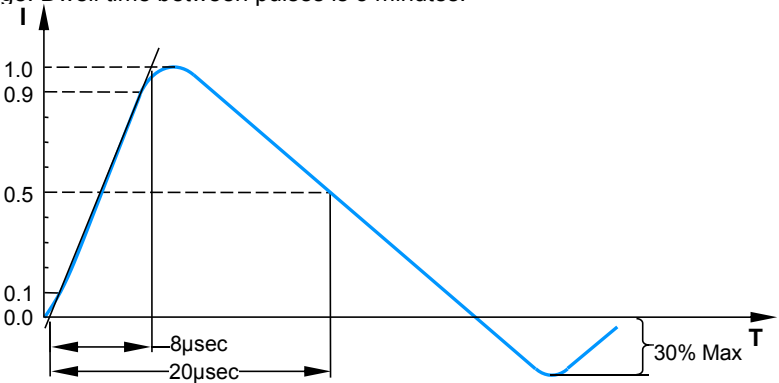
| Item | Test Condition / Description | Requirement |
|--|--|-----------------------------|
| DC Spark-over Voltage | The voltage is measured with a slowly rate of rise $dv / dt=100V/s$ | To meet the specified value |
| Impulse Spark-over Voltage | The maximum impulse spark-over voltage is measured with a rise time of $dv / dt=100V/\mu s$ or $1KV/\mu s$ | |
| Insulation Resistance | The resistance of gas tube shall be measured each terminal each other terminal, please see above spec. | |
| Capacitance | The capacitance of gas tube shall be measured each terminal to each other terminal. Test frequency :1MHz | |
| Nominal Impulse Discharge Current | The maximum current applying a waveform of $8/20\mu s$ that can be applied across the terminals of the gas tube. One hour after the test is completed, re-testing of the DC spark-over voltage does not exceed $\pm 30\%$ of the nominal DC spark-over voltage. Dwell time between pulses is 3 minutes.  | |
| Nominal Alternating Discharge Current | Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. The DC spark-over voltage does not exceed $\pm 30\%$ of the nominal DC spark-over voltage. $IR > 10^8\text{ohms}$. | |

Recommended Soldering Profile

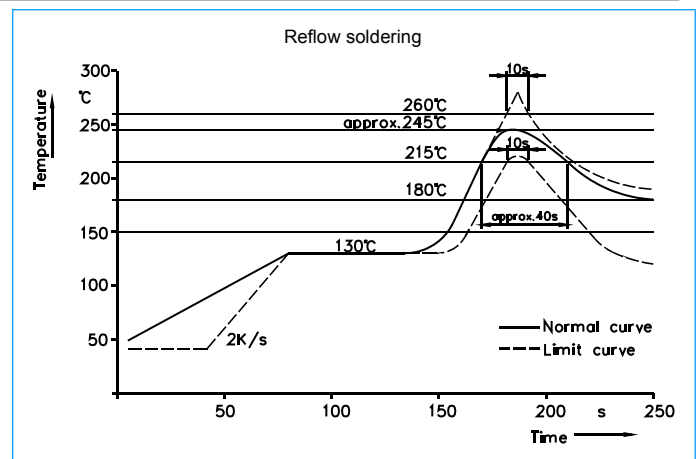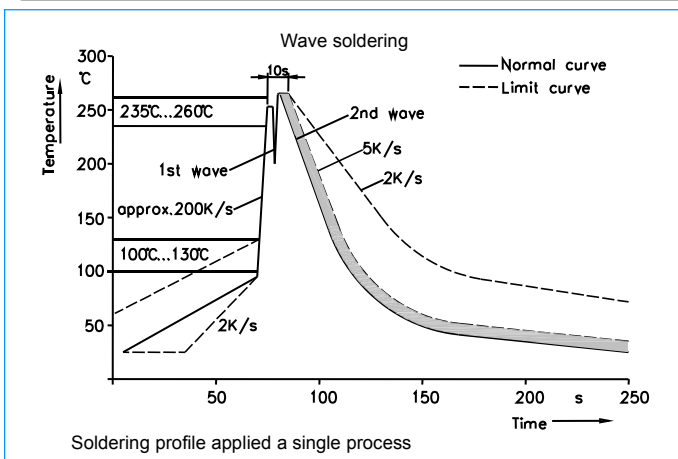


Soldering Parameters - Hand Soldering

Solder Iron Temperature: $350^{\circ}C \pm 5^{\circ}C$
Heating Time: 5 seconds max.

3-Electrode Gas Discharge Tube (GDT)

SC3E6 Series


Part Numbering

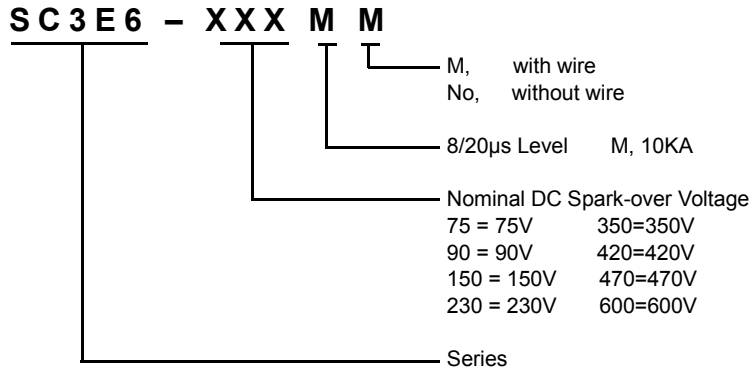

Packaging

| Part Number | Description | Quantity |
|-------------|--|----------|
| SC3E6-XXXMM | 100PCS per Tray, 10 Trays / Inner Carton | 1000 PCS |
| SC3E6-XXXM | 100PCS per Tray, 10 Trays / Inner Carton | 1000 PCS |

Tray Dimension (Unit: mm)

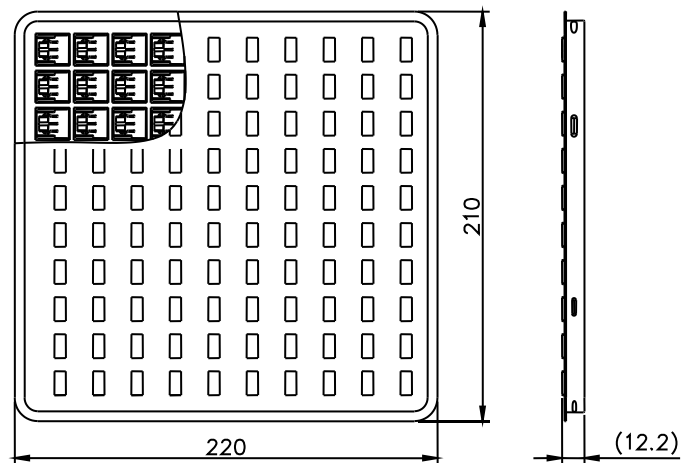

Cautions and Warnings

- ◆ Gas discharge tubes (GDT) must not be operated directly in power supply networks.
- ◆ Gas discharge tubes (GDT) may become hot in case of longer periods of current stress (danger of burning).
- ◆ Gas discharge tubes (GDT) may be used only within their specified values. In the event of overload, the head contacts may fail or the component may be destroyed.
- ◆ Damaged Gas discharge tubes (GDT) must not be re-used.