
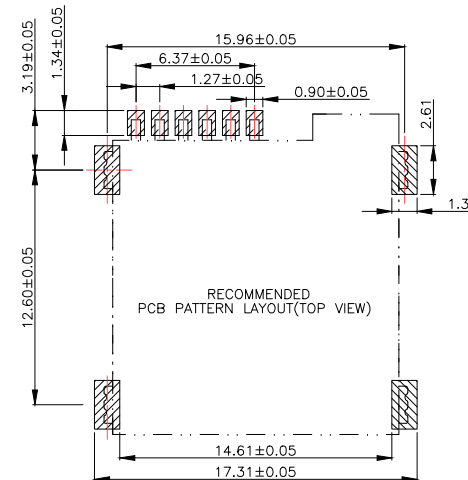


C8	RESERVED
C7	I/O
C6	VPP
C5	GND
C4	RESERVED
C3	CLK
C2	RST
C1	VCC
PIN NO.	PIN NAME

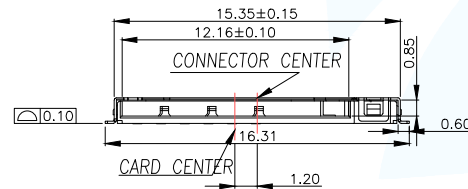

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CURRENT RATING: 0.5 Amp. MAX.
  - VOLTAGE: 100V DC. MAX.
  - LOW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
  - INSULATION RESISTANCE: (INITIAL) 1000MOhms MIN.. (FINAL) 100MOhms MIN. BY APPLYING 500V DC ON MATED AND UNMATED CONNECTORS THROUGH MIL-STD-202, METHOD 302.
- MECHANICAL CHARACTERISTICS:
  - DURABILITY: 5000 CYCLES.
  - OPERATING TEMP. RANGE: -25°C TO 85°C. [INCLUDING TERMINAL TEMP. RISE]
  - STORAGE TEMP.: -40°C TO 85°C.
- DIMENSIONS MARKED ∇ ARE MAJOR CHECKED DIMENSIONS.
- HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC. NO. "EPI12".
- QUANTITY OF PRODUCTS: 1400PCS/REEL

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: MICRO SIM CARD PUSH PUSH 6PIN H1.35
DECIMALS:	ANGLES:		PAR SMC-202S-ARP6 DWN YAO 2017.05.20 CHKD APVD
		CUSTOMER COPY	SCALE: 1:1 UNIT: MM SIZE: A4 SHEET: 1F1 REV: A