MIC2915X/30X/50X/75X

High-Current Low Dropout Regulators

Features

- High Current Capability:
  - MIC29150/29151/29152/29153: 1.5A
  - MIC29300/29301/29302/29303: 3A
  - MIC29500/29501/29502/29503: 5A
  - MIC29751/29752: 7.5A
- Low Dropout Voltage
- Low Ground Current
- Accurate 1% Guaranteed Tolerance
- Extremely Fast Transient Response
- Reverse-Battery and “Load Dump” Protection
- Zero-Current Shutdown Mode (5-Pin Versions)
- Error Flag Signals Output Out-of-Regulation (5-Pin Versions)
- Also Characterized for Smaller Loads with Industry-Leading Performance Specifications
- Fixed-Voltage and Adjustable Versions

Applications

- Battery-Powered Equipment
- High-Efficiency Green Computer Systems
- Automotive Electronics
- High-Efficiency Linear Power Supplies
- High-Efficiency Post-Regulator for Switching Supply

General Description

The MIC2915x/2930x/2950x/2975x are high current, high accuracy, low dropout voltage regulators. Using Microchip’s proprietary Super βeta PNP process with a PNP pass element, these regulators feature 350 mV to 425 mV (full load) typical dropout voltages and very low ground current. Designed for high current loads, these devices also find applications in lower current, extremely low dropout-critical systems, where their tiny dropout voltage and ground current values are important attributes.

The MIC2915x/2930x/2950x/2975x are fully protected against overcurrent faults, reversed input polarity, reversed lead insertion, overtemperature operation, and positive and negative transient voltage spikes. Five pin fixed-voltage versions feature logic level ON/OFF control and an error flag that signals whenever the output falls out of regulation. Flagged states include low input voltage (dropout), output current limit, overtemperature shutdown, and extremely high voltage spikes on the input.

On the MIC29xx1 and MIC29xx2, the ENABLE pin may be tied to V_{IN} if it is not required for ON/OFF control. The MIC2915x/2930x/2950x are available in 3-pin and 5-pin TO-220 and surface mount TO-263 (D^2Pak) packages. The MIC2975x 7.5A regulators are available in a 5-pin TO-247 package. The 1.5A, adjustable output MIC29152 is available in a 5-pin power D-Pak (TO-252) package.

For applications with input voltage 6V or below, see MIC37xxx LDOs.

Package Types

MIC29150/300/500
3-Lead TO-220 (T)
(Top View)

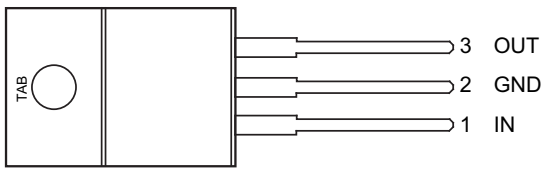

MIC29151/301/501/751
5-Lead TO-220 Fixed Voltage (T)
(Top View)

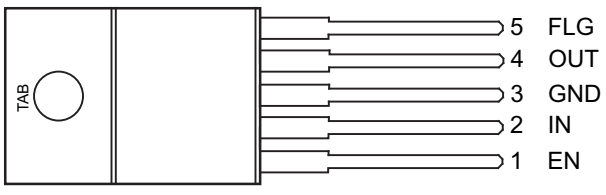

© 2016 Microchip Technology Inc.

Package Types (Continued)

MIC29152/302/502
5-Lead TO-220 Adjustable Voltage (T)
(Top View)

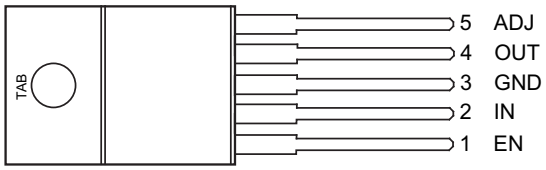

MIC29153/303/503
5-Lead TO-220 Adjustable with Flag (T)
(Top View)

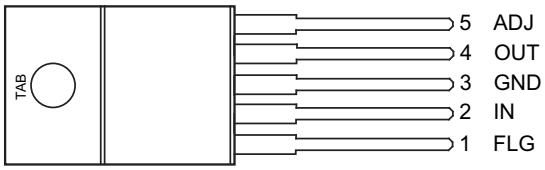

MIC29751
5-Lead TO-247 Fixed Voltage (WT)
(Top View)

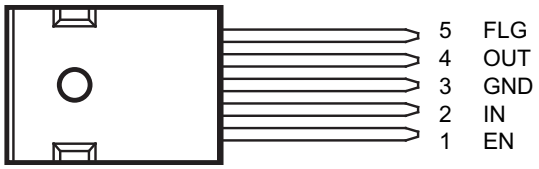

MIC29150/300
3-Lead TO-263 (D^2Pak) (UT)
(Top View)



MIC29752
5-Lead TO-247 Adjustable Voltage (WT)
(Top View)

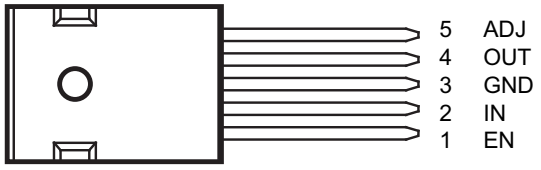

MIC29302/502
5-Lead TO-263 (D^2Pak) Adj. Voltage (U)
(Top View)



MIC29151/301/501
5-Lead TO-263 (D^2Pak) Fixed Voltage (U)
(Top View)



MIC29152
5-Lead TO-252 (D-Pak) Adjustable Voltage (D)
(Top View)



MIC29153/303/503
5-Lead TO-263 (D^2Pak) Adj. with Flag (U)
(Top View)



© 2016 Microchip Technology Inc.

Typical Application Circuits

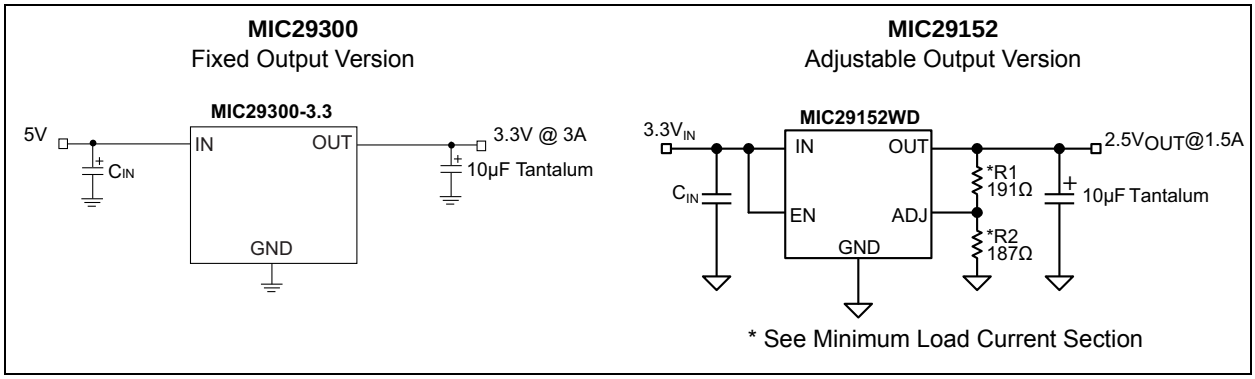

Functional Diagram

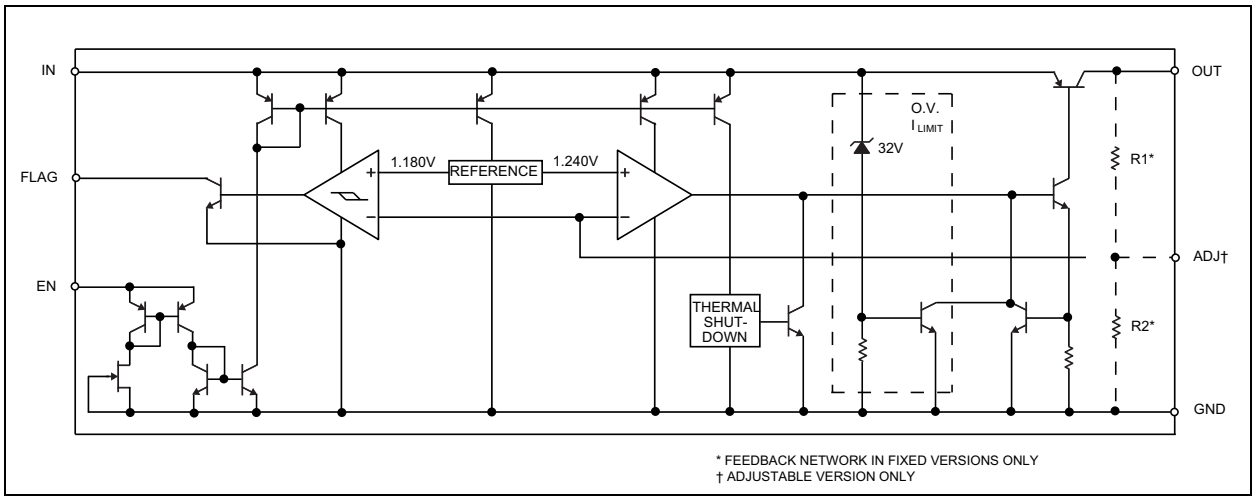

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings † (Note 1)

Input Supply Voltage (V_{IN}) (Note 1) ..... –20V to +60V
Enable Input Voltage (V_{EN}) ..... –0.3V to V_{IN}
Power Dissipation ..... Internally Limited
ESD Rating ..... Note 2

Operating Ratings‡

Maximum Operating Input Voltage ..... +26V

† **Notice:** Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

‡ **Notice:** The device is not guaranteed to function outside its operating ratings.

Note 1: Maximum positive supply voltage of 60V must be of limited duration (<100 ms) and duty cycle (≤1%). The maximum continuous supply voltage is 26V. Exceeding the absolute maximum rating may damage the device.

2: Devices are ESD sensitive. Handling precautions recommended.

© 2016 Microchip Technology Inc.

TABLE 1-1: ELECTRICAL CHARACTERISTICS (Note 1, Note 2)

Electrical Characteristics: $V_{IN} = V_{OUT} + 1V$; I_{OUT} = 10 mA; T_J = +25°C. **Bold** values indicate –40°C ≤ T_J ≤ +125°C, unless noted.

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Output Voltage	V_{OUT}	–1	—	1	%	I_{OUT} = 10 mA
		–2	—	2		10 mA ≤ I_{OUT} ≤ I_{FL}, (V_{OUT} + 1V) ≤ V_{IN} ≤26V (Note 3)
Line Regulation		—	0.06	0.5	%	I_{OUT} = 10 mA, (V_{OUT} + 1V) ≤ V_{IN} ≤ 26V
Load Regulation		—	0.2	1	%	$V_{IN} = V_{OUT}$ + 1V, 10 mA ≤ I_{OUT} ≤ 1.5A (Note 3, Note 4)
$\Delta V_O/\Delta T$		—	**20**	**100**	ppm/°C	Output Voltage (Note 4) Temperature Coefficient
Dropout Voltage ΔV_{OUT} = –1% (Note 5)		—	80	**200**	mV	MIC2915x I_{OUT} = 100 mA
		—	220	—		MIC2915x I_{OUT} = 750 mA
		—	350	**600**		MIC2915x I_{OUT} = 1.5A
		—	80	**175**		MIC2930x I_{OUT} = 100 mA
		—	250	—		MIC2930x I_{OUT} = 1.5A
		—	370	**600**		MIC2930x I_{OUT} = 3A
		—	125	**250**		MIC2950x I_{OUT} = 250 mA
		—	250	—		MIC2950x I_{OUT} = 2.5A
		—	370	**600**		MIC2950x I_{OUT} = 5A
		—	80	**200**		MIC2975x I_{OUT} = 250 mA
		—	270	—		MIC2975x I_{OUT} = 4A
		—	425	750		MIC2975x I_{OUT} = 7.5A
Ground Current (Note 6)	I_{GND}	—	8	**20**	mA	MIC2915x I_{OUT} = 750 mA, $V_{IN} = V_{OUT}$ + 1V
		—	22	—		MIC2915x I_{OUT} = 1.5A
		—	10	**35**		MIC2930x I_{OUT} = 1.5A, $V_{IN} = V_{OUT}$ + 1V
		—	37	—		MIC2930x I_{OUT} = 3A
		—	15	**50**		MIC2950x I_{OUT} = 2.5A, $V_{IN} = V_{OUT}$ + 1V
		—	70	—		MIC2950x I_{OUT} = 5A
		—	35	**75**		MIC2975x I_{OUT} = 4A, $V_{IN} = V_{OUT}$ + 1V
			120	—		MIC2975x I_{OUT} = 7.5A
Ground Pin Current at Dropout	I_{GRNDDO}	—	0.9	—	mA	MIC2915x, V_{IN} = 0.5V less than specified V_{OUT} × I_{OUT} = 10 mA
		—	1.7	—		MIC2930x, V_{IN} = 0.5V less than specified V_{OUT} × I_{OUT} = 10 mA
		—	2.1	—		MIC2950x, V_{IN} = 0.5V less than specified V_{OUT} × I_{OUT} = 10 mA
		—	3.1	—		MIC2975x, V_{IN} = 0.5V less than specified V_{OUT} × I_{OUT} = 10 mA
Current Limit	I_{LIM}	—	2.1	**3.5**	A	MIC2915x, V_{OUT} = 0V, (Note 7)
		—	4.5	**5.0**		MIC2930x, V_{OUT} = 0V, (Note 7)
		—	7.5	**10.0**		MIC2950x, V_{OUT} = 0V, (Note 7)
		—	9.5	**15.0**		MIC2975x, V_{OUT} = 0V, (Note 7)

© 2016 Microchip Technology Inc.

TABLE 1-1: ELECTRICAL CHARACTERISTICS (Note 1, Note 2) (CONTINUED)

Electrical Characteristics: $V_{IN} = V_{OUT} + 1V$; I_{OUT} = 10 mA; T_J = +25°C. **Bold** values indicate –40°C ≤ T_J ≤ +125°C, unless noted.

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
e_n, Output Noise Voltage (10 Hz to 100 kHz) I_L = 100 mA		—	400	—	μV_{RMS}	C_L = 10 µF
		—	260	—		C_L = 33 µF
Ground Current in Shutdown		—	2	10	µA	MIC29150/1/2/3 only
		—	—	**30**		V_{EN} = 0.4V
Reference - MIC29xx2/MIC29xx3						
Reference Voltage		1.228	1.240	1.252	V	—
		1.215	—	**1.265**	V_{MAX}	
Reference Voltage		**1.203**	—	**1.277**	V	Note 8
Adjust Pin Bias Current		—	40	80	nA	—
		—	—	**120**		
Reference Voltage Temperature Coefficient		—	20	—	ppm/°C	Note 9
Adjust Pin Bias Current Temperature Coefficient		—	0.1	—	nA/°C	—
Flag Output (Error Comparator) - MIC29xx1/29xx3						
Output Leakage Current		—	0.01	1.00	µA	V_{OH} = 26V
		—	—	**2.00**		
Output Low Voltage	V_{OL}	—	220	300	mV	Device set for 5V, V_{IN} = 4.5V I_{OL} = 250 µA
		—	—	**400**		
Upper Threshold Voltage		40	60	—	mV	Device set for 5V, (Note 10)
		25	—	—		
Lower Threshold Voltage		—	75	95	mV	Device set for 5V, (Note 10)
		—	—	**140**		
Hysteresis		—	15	—	mV	Device set for 5V, (Note 10)

© 2016 Microchip Technology Inc.

TABLE 1-1: ELECTRICAL CHARACTERISTICS (Note 1, Note 2) (CONTINUED)

Electrical Characteristics: $V_{IN} = V_{OUT} + 1V$; I_{OUT} = 10 mA; T_J = +25°C. **Bold** values indicate –40°C ≤ T_J ≤ +125°C, unless noted.

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
ENABLE Input - MIC29xx1/MIC29xx2						
Input Logic Voltage Low (OFF)		—	—	0.8	V	—
Input Logic Voltage High (ON)		2.4	—	—	V	—
Enable Pin Input Current		—	100	600	µA	V_{EN} = 26V
		—	—	**750**		
		0.7	—	2		V_{EN} = 0.8V
		—	—	**4**		
Regulator Output Current in Shutdown		—	10	**500**	µA	$V_{EN} \le 0.8V$ and $V_{IN} \le 26V$, V_{OUT} = 0.

Note 1: Specification for packaged product only.

2: When used in dual supply systems where the regulator load is returned to a negative supply, the output voltage must be diode clamped to ground.

3: Full load current (I_{FL}) is defined as 1.5A for the MIC2915x, 3A for the MIC2930x, 5A for the MIC2950x, and 7.5A for the MIC2975x families.

4: Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.

5: Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its normal value with V_{OUT} + 1V applied to V_{IN}.

6: Ground pin current is the regulator quiescent current. The total current drawn from the source is the sum of the load current plus the ground pin current.

7: $V_{IN} = V_{OUT}$ (nominal) + 1V. For example, use V_{IN} = 4.3V for a 3.3V regulator or use 6V for a 5V regulator. Employ pulse-testing procedures to pin current.

8: $V_{REF} \le V_{OUT} \le (V_{IN} – 1V)$, $2.3V \le V_{IN} \le 26V$, 10 mA < $I_L \le I_{FL}$, $T_J \le T_{JMAX}$.

9: Thermal regulation is defined as the change in output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a 200 mA load pulse at V_{IN} = 20V (a 4W pulse) for T = 10 ms.

10: Comparator thresholds are expressed in terms of a voltage differential at the adjust terminal below the nominal reference voltage measured at 6V input. To express these thresholds in terms of output voltage change, multiply by the error amplifier gain = V_{OUT}/V_{REF} = (R1 + R2)/R2. For example, at a programmed output voltage of 5V, the error output is guaranteed to go low when the output drops by 95 mV x 5V/1.240V = 384 mV. Thresholds remain constant as a percent of V_{OUT} as V_{OUT} is varied, with the dropout warning occurring at typically 5% below nominal, 7.7% guaranteed.

TEMPERATURE SPECIFICATIONS (Note 1)

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Storage Temperature Range	T_S	–65	—	+150	°C	—
Operating Junction Temperature	T_J	–40	—	+125	°C	—
Lead Temperature	—	—	—	+260	°C	Soldering, 5 sec.
Package Thermal Resistance						
Thermal Resistance TO-220	θ_{JC}	—	2	—	°C/W	—
Thermal Resistance TO-263	θ_{JC}	—	2	—	°C/W	—
Thermal Resistance TO-247	θ_{JC}	—	1.5	—	°C/W	—
Thermal Resistance TO-252	θ_{JC}	—	3	—	°C/W	—
Thermal Resistance TO-252	θ_{JA}	—	56	—	°C/W	—

Note 1: The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e., T_A, T_J, θ_{JA}). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +125°C rating. Sustained junction temperatures above +125°C can impact the device reliability.

© 2016 Microchip Technology Inc.

2.0 TYPICAL PERFORMANCE CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

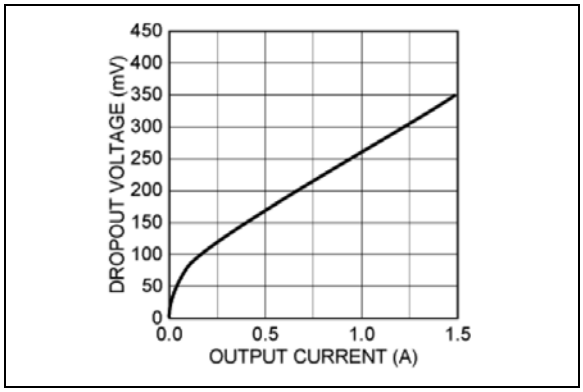

FIGURE 2-1: *MIC2915x Dropout Voltage vs. Output Current.*

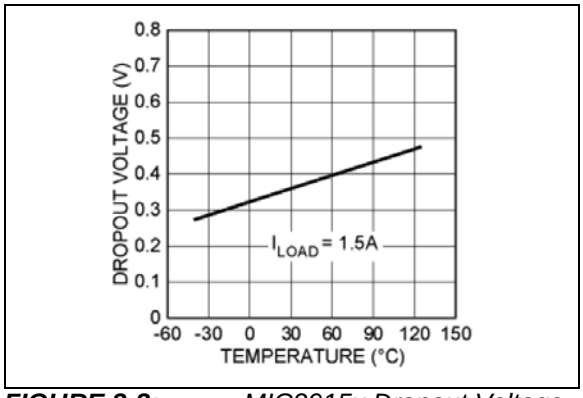

FIGURE 2-2: *MIC2915x Dropout Voltage vs. Temperature.*

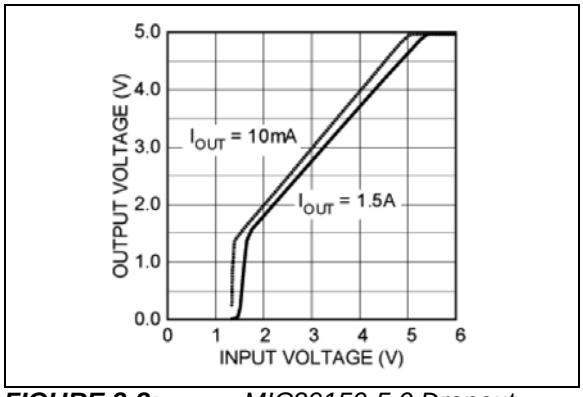

FIGURE 2-3: *MIC29150-5.0 Dropout Characteristics.*

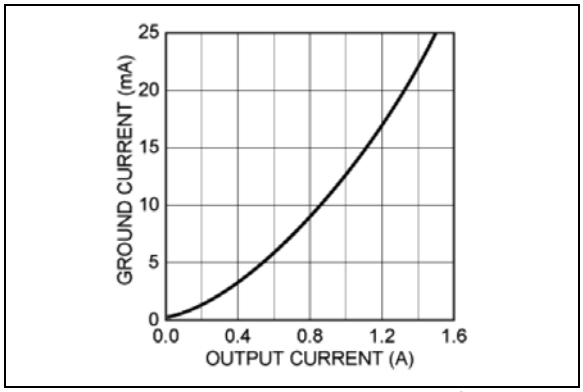

FIGURE 2-4: *MIC2915x Ground Current vs. Output Current.*

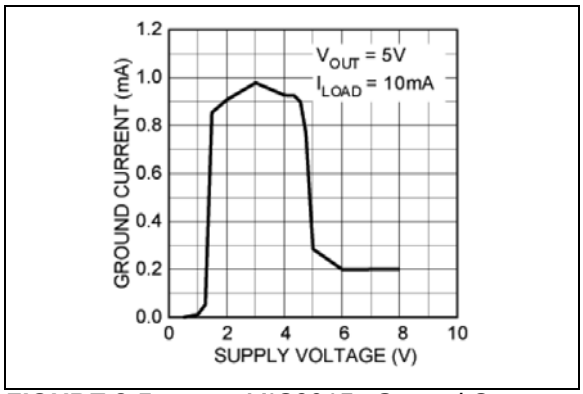

FIGURE 2-5: *MIC2915x Ground Current vs. Supply Voltage.*

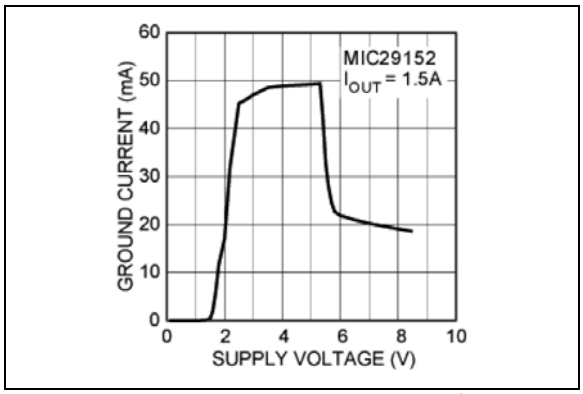

FIGURE 2-6: *MIC2915x Ground Current vs. Supply Voltage.*

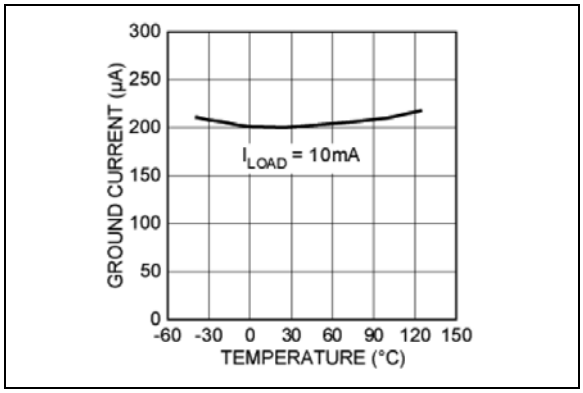

FIGURE 2-7: *MIC2915x Ground Current vs. Temperature.*

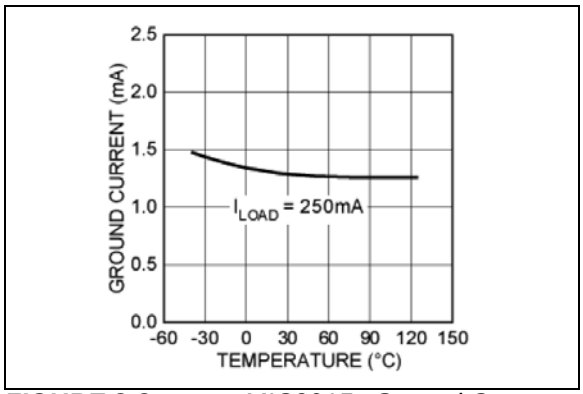

FIGURE 2-8: *MIC2915x Ground Current vs. Temperature.*

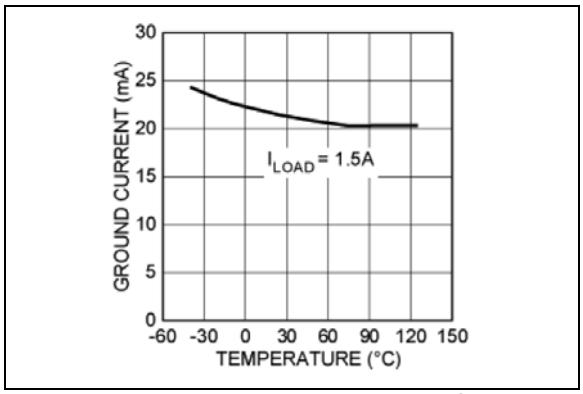

FIGURE 2-9: *MIC2915x Ground Current vs. Temperature.*

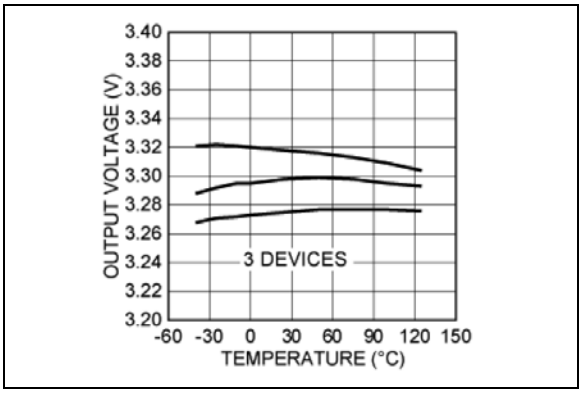

FIGURE 2-10: *MIC29150-3.3 Output Voltage vs. Temperature.*

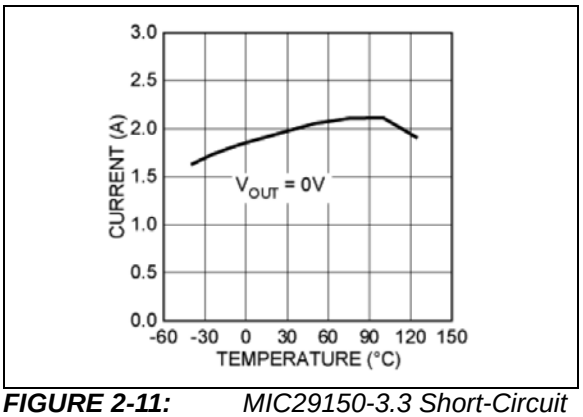

FIGURE 2-11: *MIC29150-3.3 Short-Circuit Current vs. Temperature.*

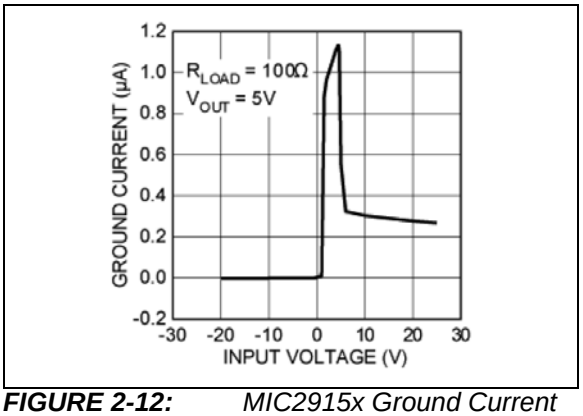

FIGURE 2-12: *MIC2915x Ground Current vs. Input Voltage.*

© 2016 Microchip Technology Inc.

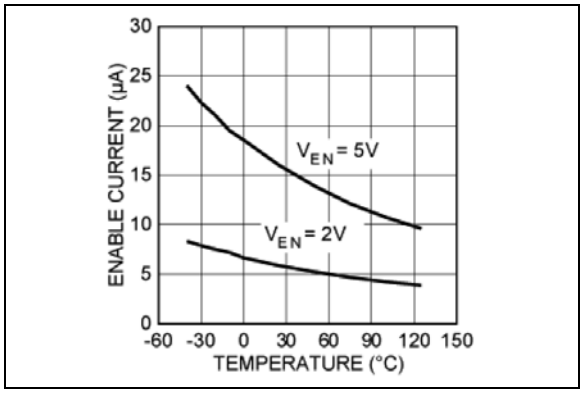

FIGURE 2-13: *MIC29151-xx/2 Enable Current vs. Temperature.*

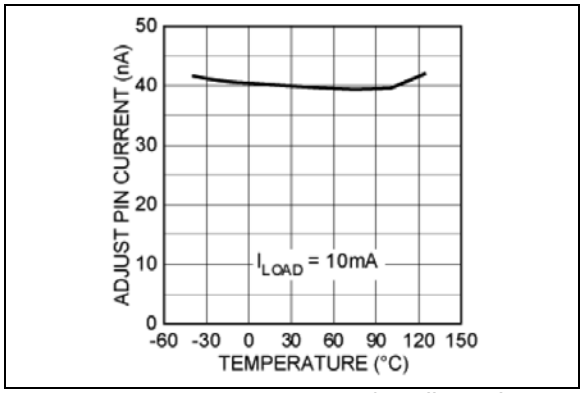

FIGURE 2-16: *MIC29152/3 Adjust Pin Current vs. Temperature.*

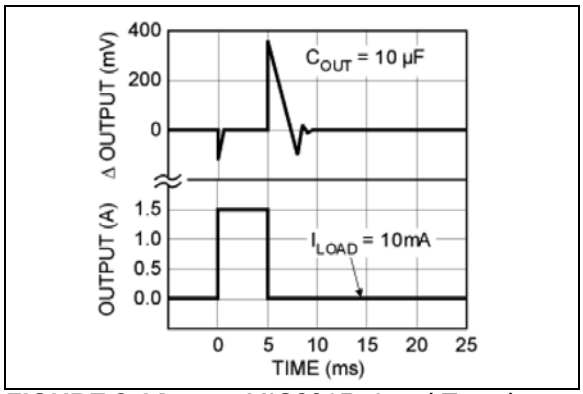

FIGURE 2-14: *MIC2915x Load Transient.*

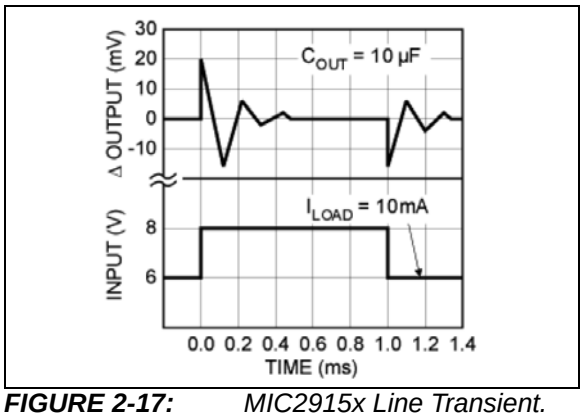

FIGURE 2-17: *MIC2915x Line Transient.*

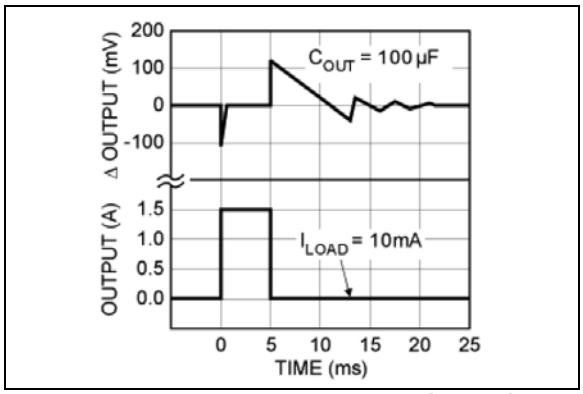

FIGURE 2-15: *MIC2915x Load Transient.*

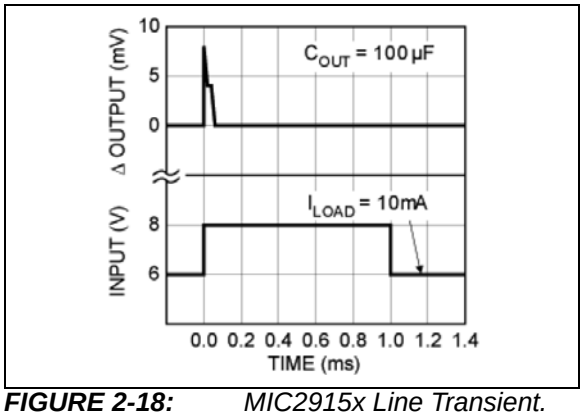

FIGURE 2-18: *MIC2915x Line Transient.*

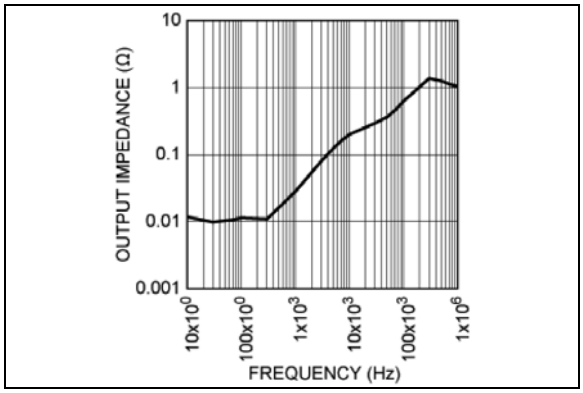

FIGURE 2-19: *MIC2915x Output Impedance vs. Frequency.*

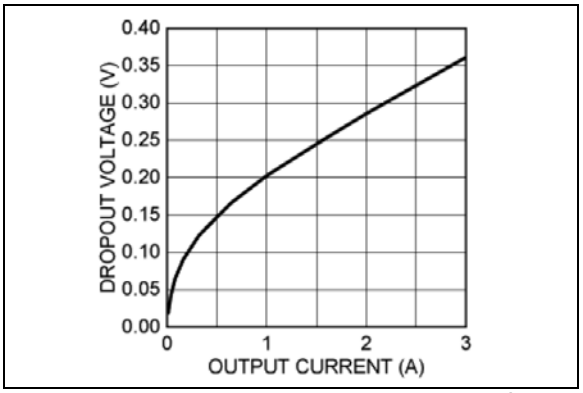

FIGURE 2-22: *MIC2930x Dropout Voltage vs. Output Current.*

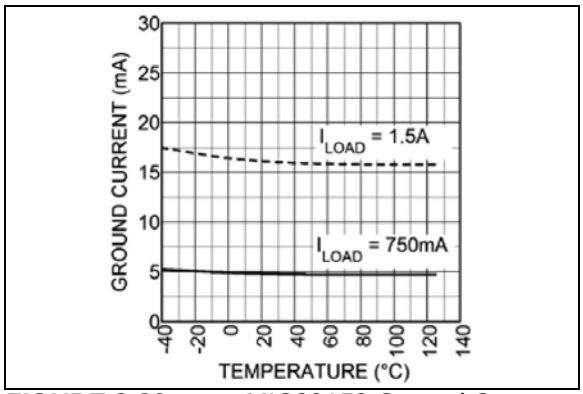

FIGURE 2-20: *MIC29152 Ground Current vs. Temperature.*

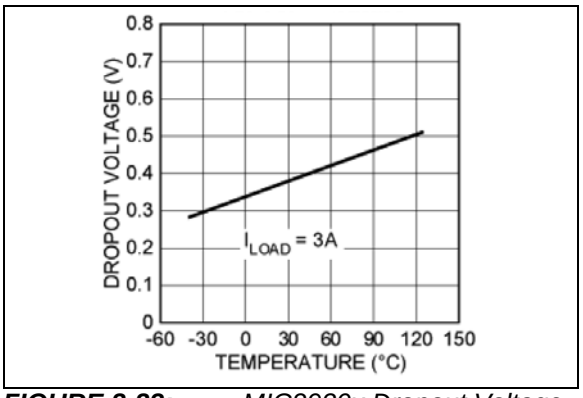

FIGURE 2-23: *MIC2930x Dropout Voltage vs. Temperature.*

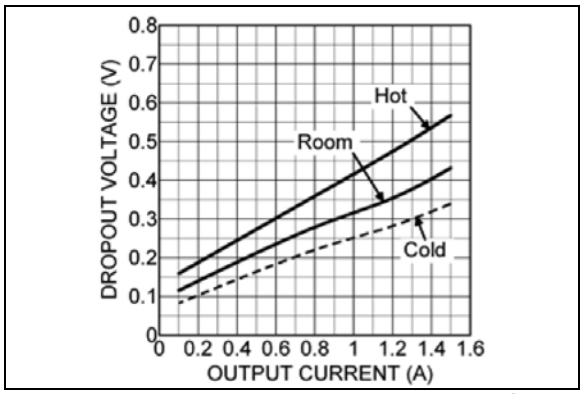

FIGURE 2-21: *MIC29152 Dropout Voltage vs. Output Current.*

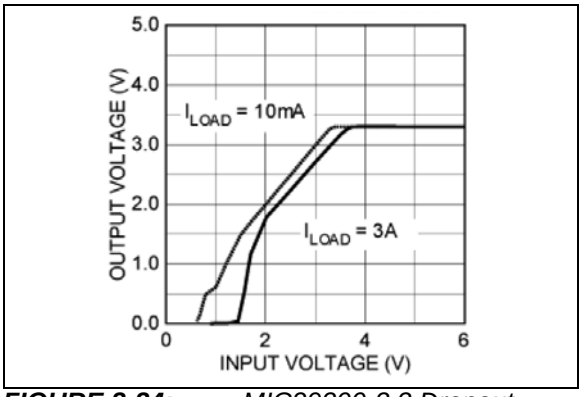

FIGURE 2-24: *MIC29300-3.3 Dropout Characteristics.*

© 2016 Microchip Technology Inc.

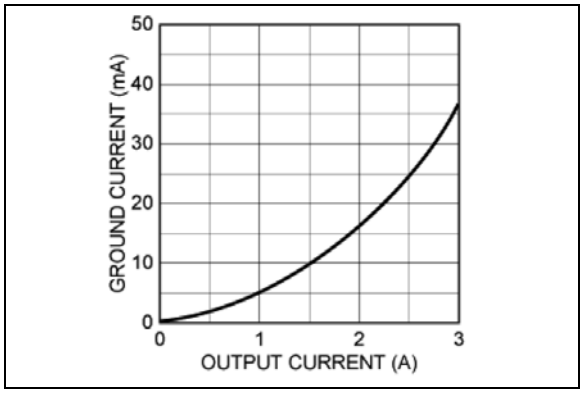

FIGURE 2-25: *MIC2930x Ground Current vs. Output Current.*

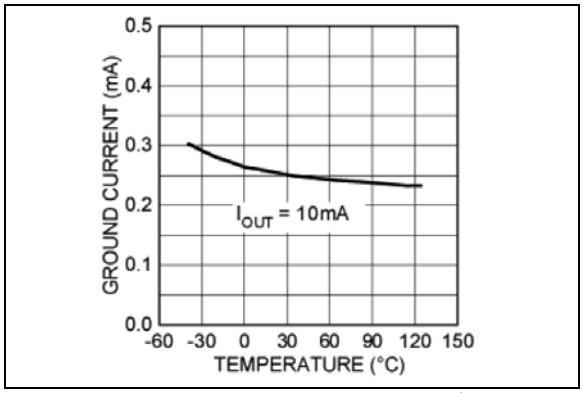

FIGURE 2-28: *MIC2930x Ground Current vs. Temperature.*

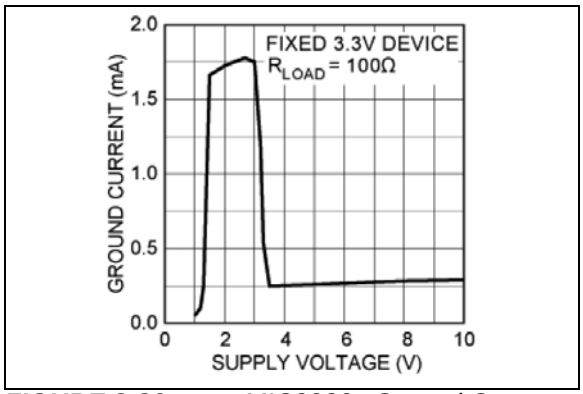

FIGURE 2-26: *MIC2930x Ground Current vs. Supply Voltage.*

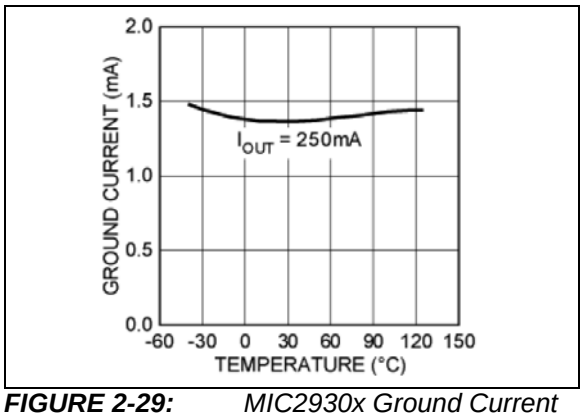

FIGURE 2-29: *MIC2930x Ground Current vs. Temperature.*

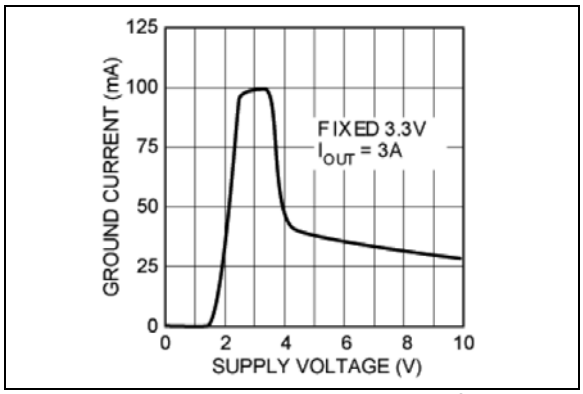

FIGURE 2-27: *MIC2930x Ground Current vs. Supply Voltage.*

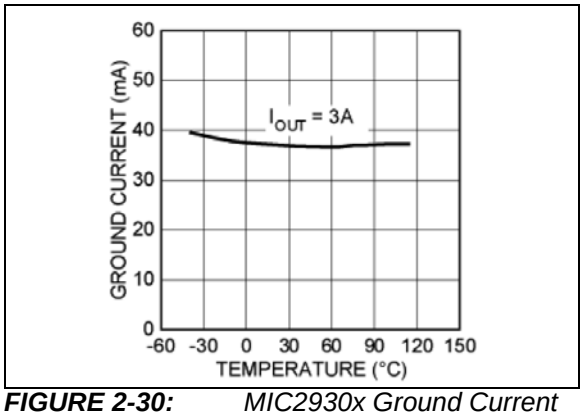

FIGURE 2-30: *MIC2930x Ground Current vs. Temperature.*

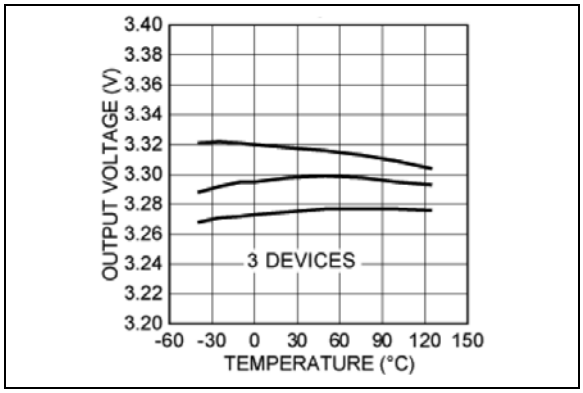

FIGURE 2-31: *MIC29300-3.3 Output Voltage vs. Temperature.*

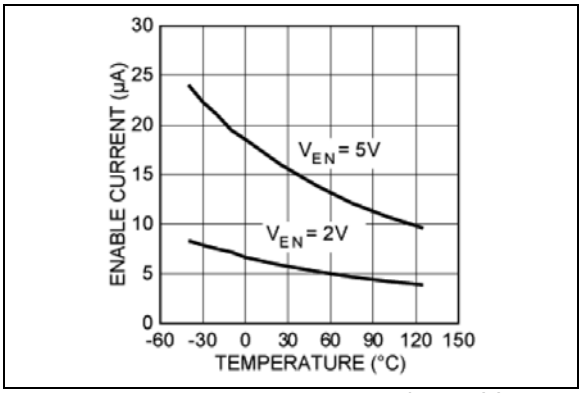

FIGURE 2-34: *MIC29301-xx/2 Enable Current vs. Temperature.*

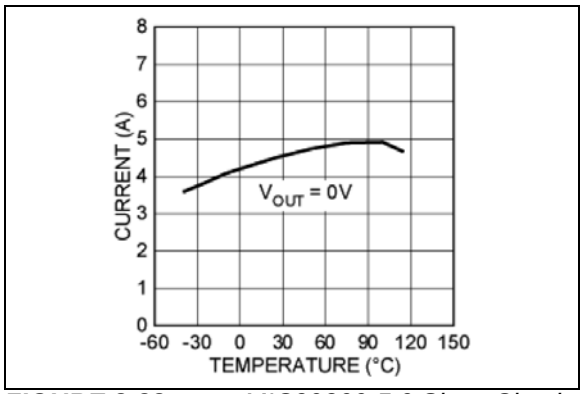

FIGURE 2-32: *MIC29300-5.0 Short-Circuit Current vs. Temperature.*

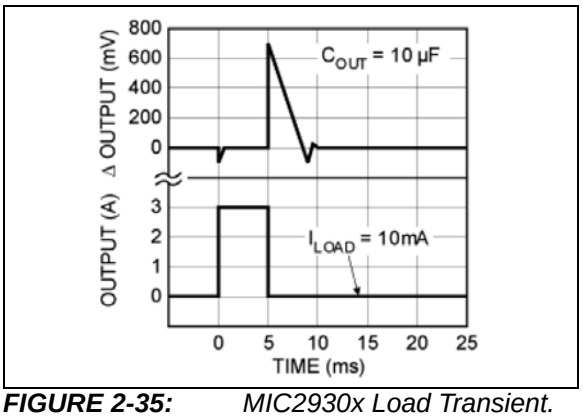

FIGURE 2-35: *MIC2930x Load Transient.*

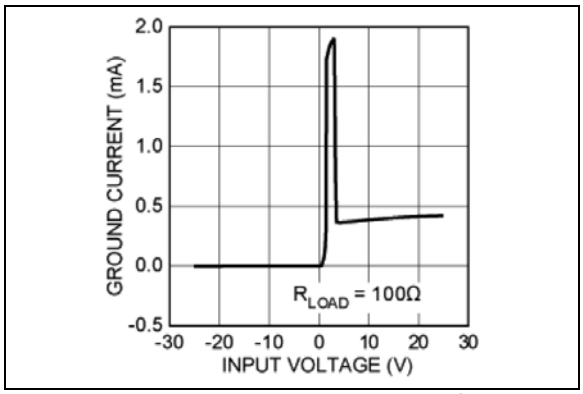

FIGURE 2-33: *MIC2930x Ground Current vs. Input Voltage.*

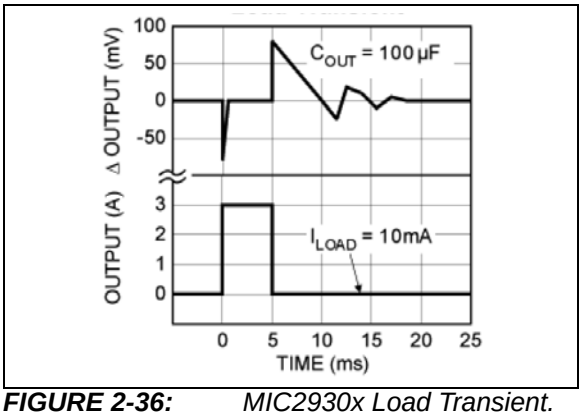

FIGURE 2-36: *MIC2930x Load Transient.*

© 2016 Microchip Technology Inc.

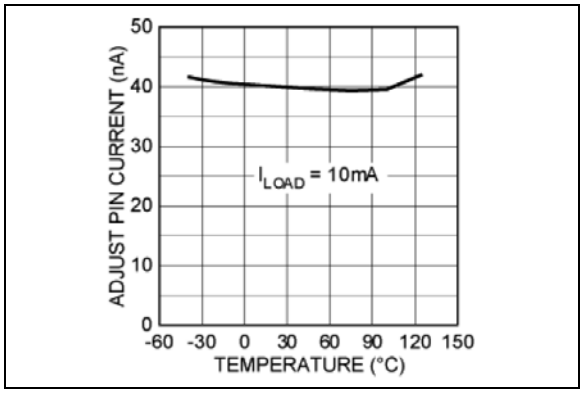

FIGURE 2-37: *MIC29302/3 Adjust Pin Current vs. Temperature.*

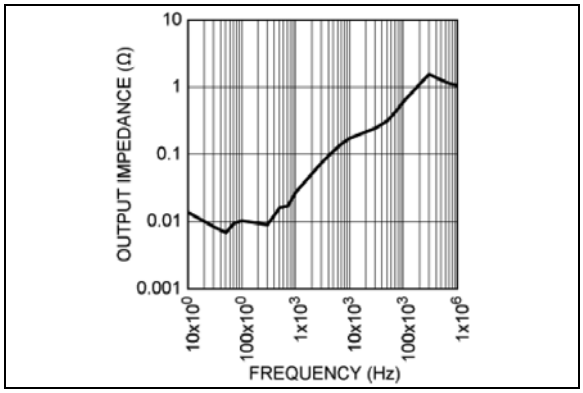

FIGURE 2-40: *MIC2930x Output Impedance vs. Frequency.*

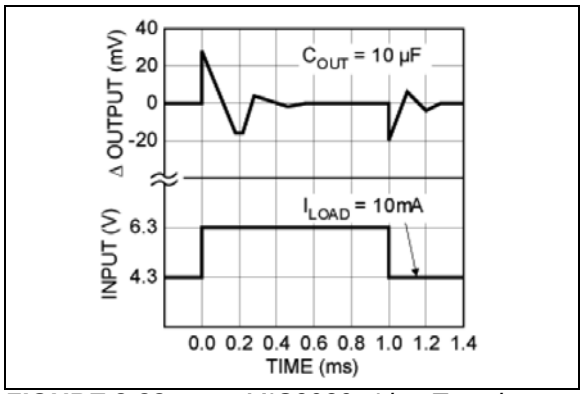

FIGURE 2-38: *MIC2930x Line Transient.*

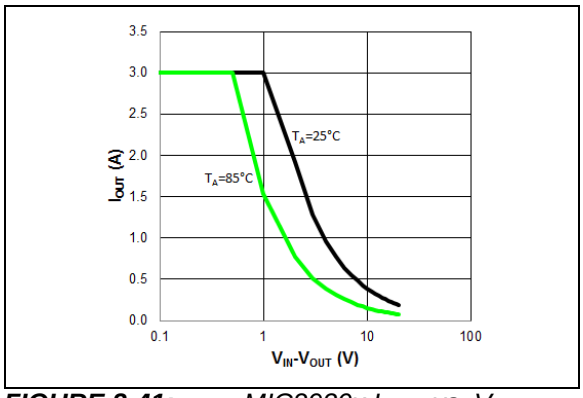

FIGURE 2-41: *MIC2930x I_{OUT} vs. V_{IN} – V_{OUT} SOA (TO-263).*

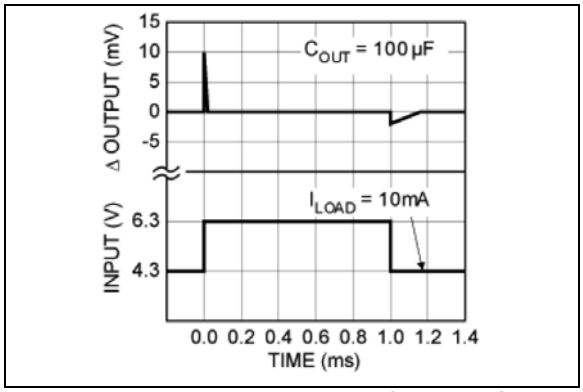

FIGURE 2-39: *MIC2930x Line Transient.*

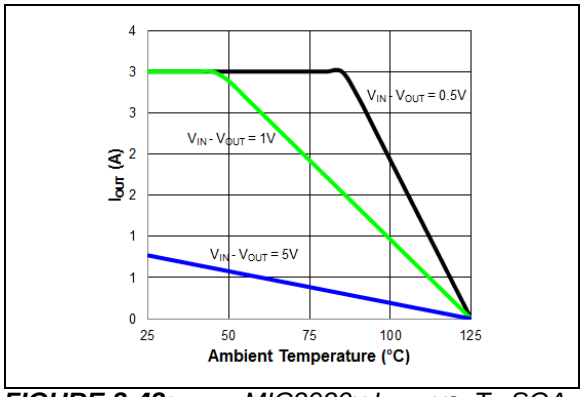

FIGURE 2-42: *MIC2930x I_{OUT} vs. T_A SOA (TO-263).*

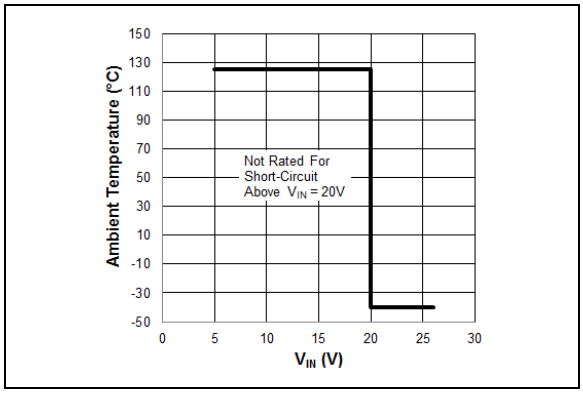

FIGURE 2-43: *MIC2930x Short-Circuit SOA vs. Temperature (TO-263).*

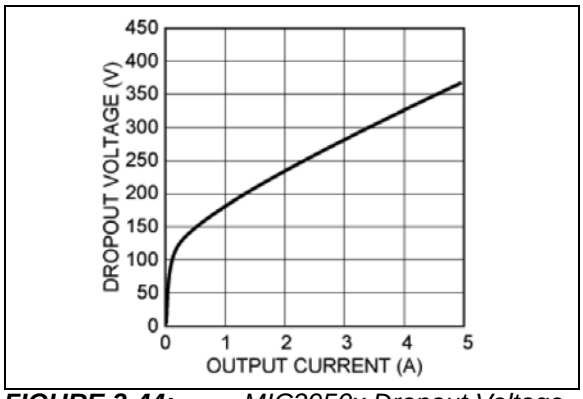

FIGURE 2-44: *MIC2950x Dropout Voltage vs. Output Current.*

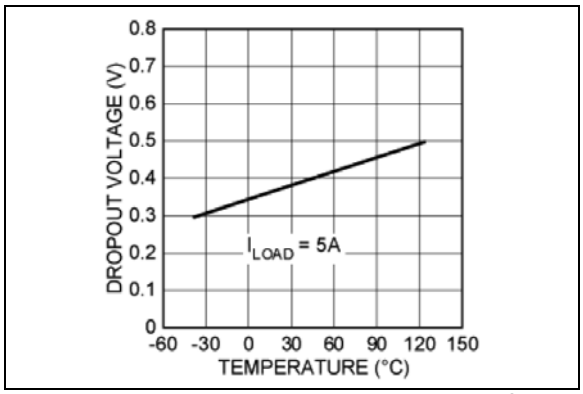

FIGURE 2-45: *MIC2950x Dropout Voltage vs. Temperature.*

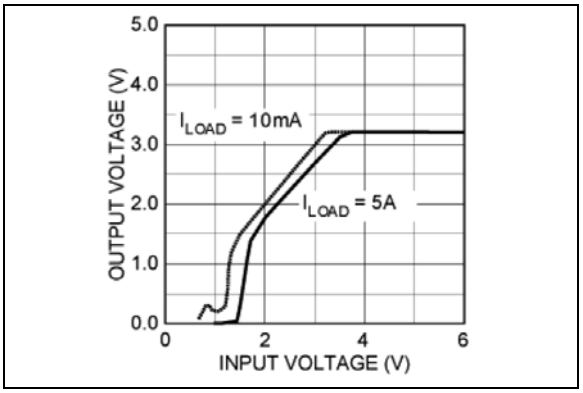

FIGURE 2-46: *MIC29500-3.3 Dropout Characteristics.*

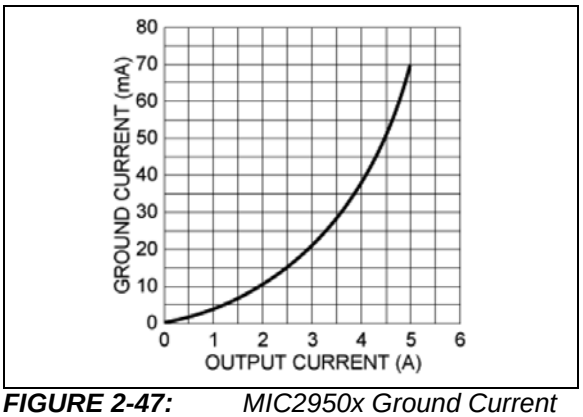

FIGURE 2-47: *MIC2950x Ground Current vs. Output Current.*

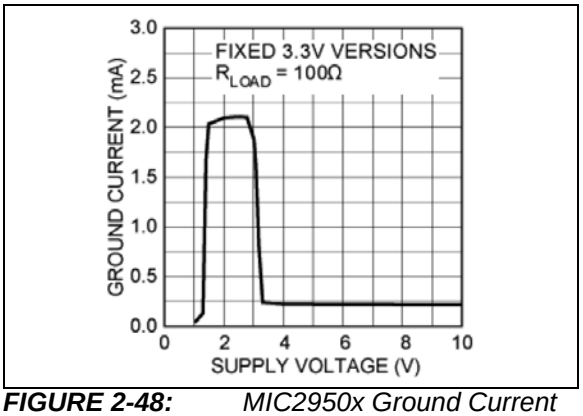

FIGURE 2-48: *MIC2950x Ground Current vs. Supply Voltage.*

© 2016 Microchip Technology Inc.

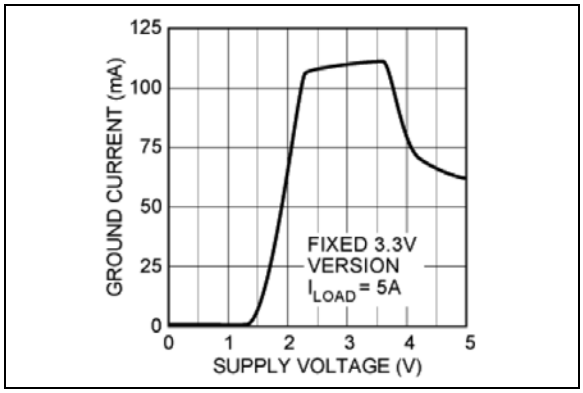

FIGURE 2-49: *MIC2950x Ground Current vs. Supply Voltage.*

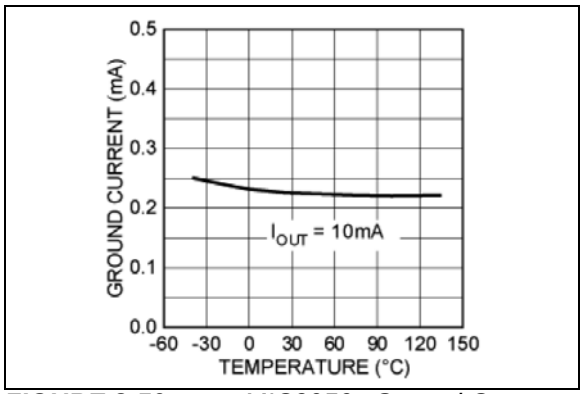

FIGURE 2-50: *MIC2950x Ground Current vs. Temperature.*

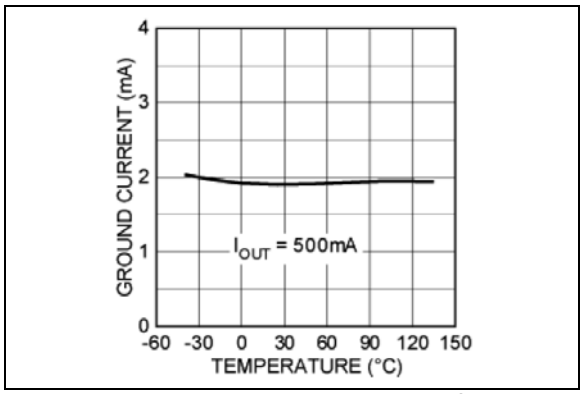

FIGURE 2-51: *MIC2950x Ground Current vs. Temperature.*

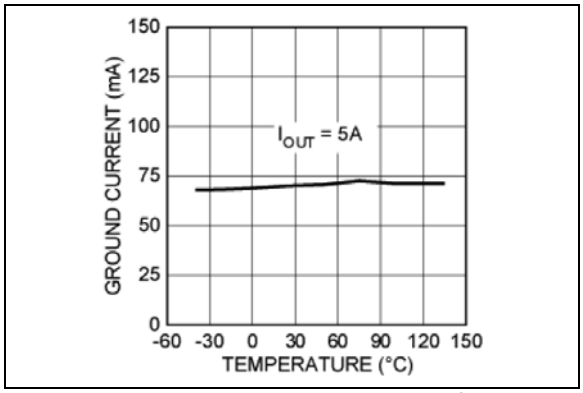

FIGURE 2-52: *MIC2950x Ground Current vs. Temperature.*

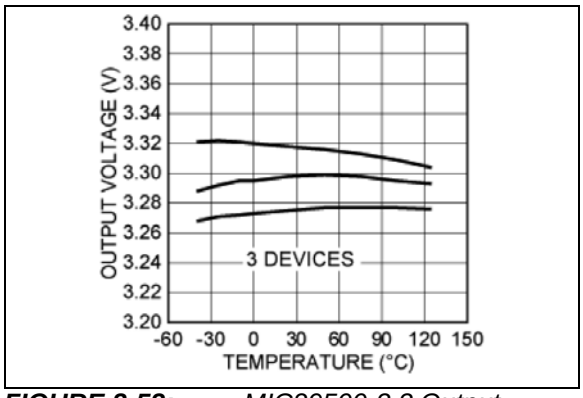

FIGURE 2-53: *MIC29500-3.3 Output Voltage vs. Temperature.*

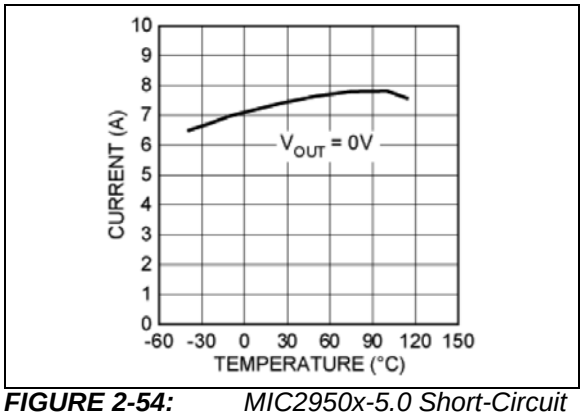

FIGURE 2-54: *MIC2950x-5.0 Short-Circuit Current vs. Temperature.*

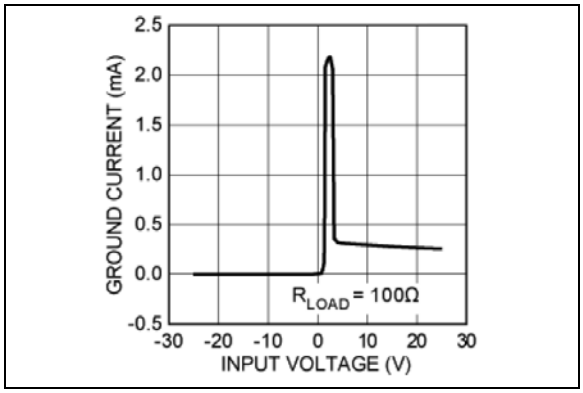

FIGURE 2-55: *MIC2950x Ground Current vs. Input Voltage.*

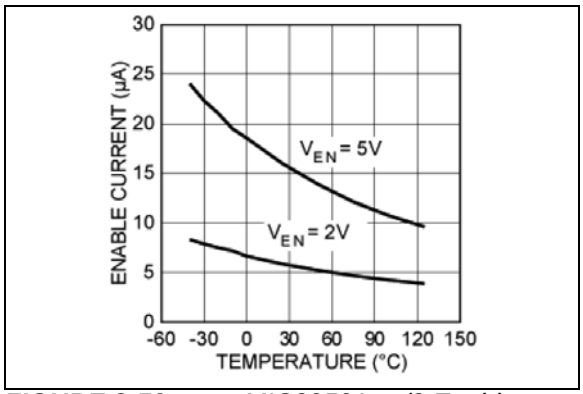

FIGURE 2-56: *MIC29501-xx/2 Enable Current vs. Temperature.*

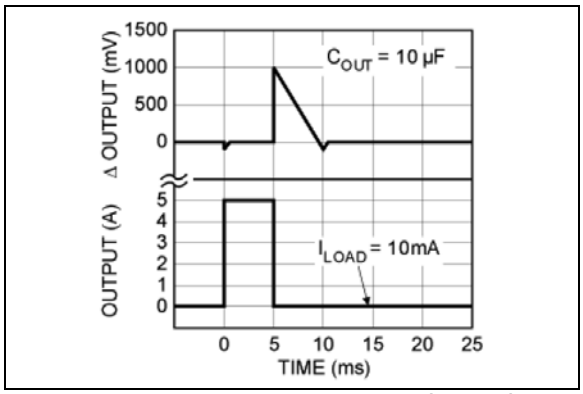

FIGURE 2-57: *MIC2950x Load Transient.*

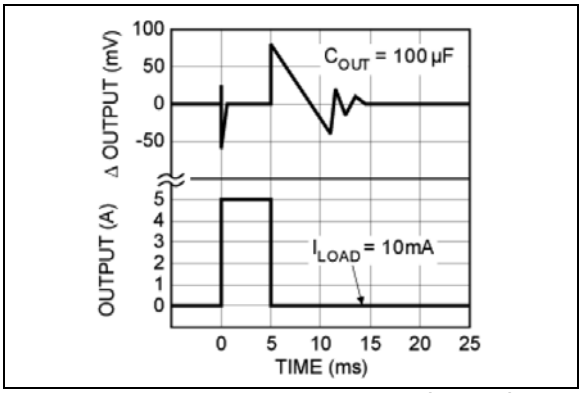

FIGURE 2-58: *MIC2950x Load Transient.*

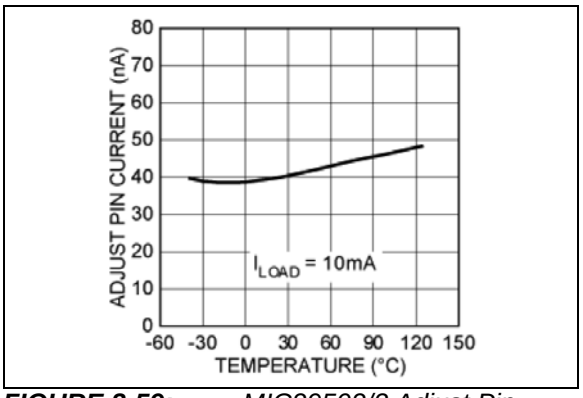

FIGURE 2-59: *MIC29502/3 Adjust Pin Current vs. Temperature.*

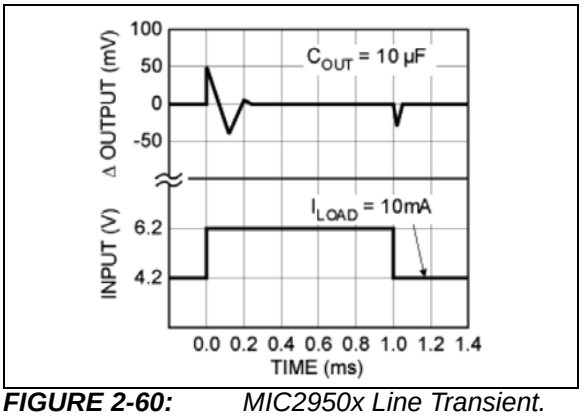

FIGURE 2-60: *MIC2950x Line Transient.*

© 2016 Microchip Technology Inc.

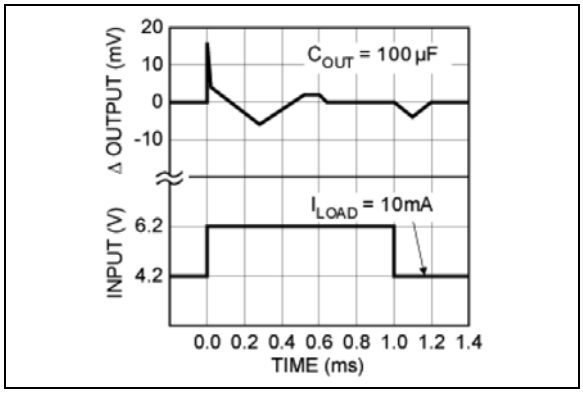

FIGURE 2-61: *MIC2950x Line Transient.*

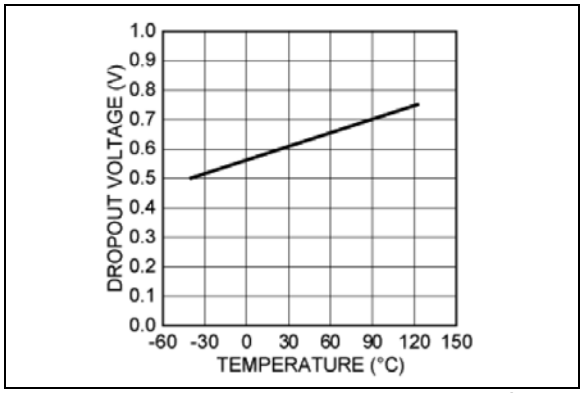

FIGURE 2-64: *MIC2975x Dropout Voltage vs. Temperature.*

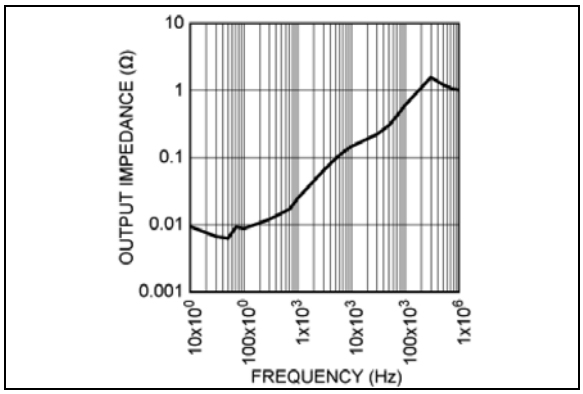

FIGURE 2-62: *MIC2950x Output Impedance vs. Frequency.*

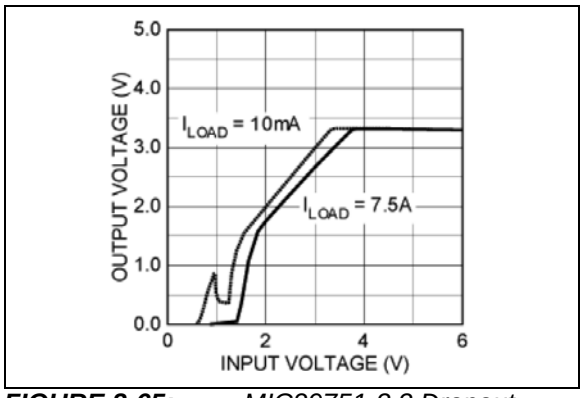

FIGURE 2-65: *MIC29751-3.3 Dropout Characteristics.*

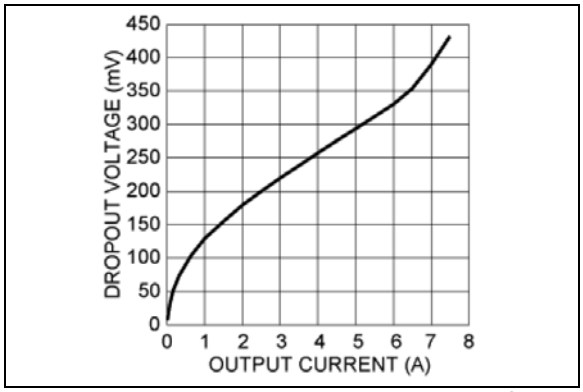

FIGURE 2-63: *MIC2975x Dropout Voltage vs. Output Current.*

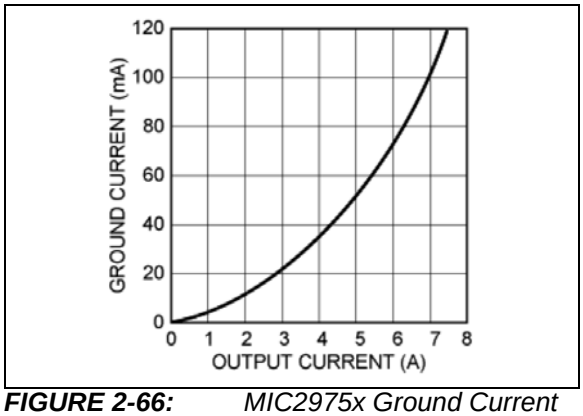

FIGURE 2-66: *MIC2975x Ground Current vs. Output Current.*

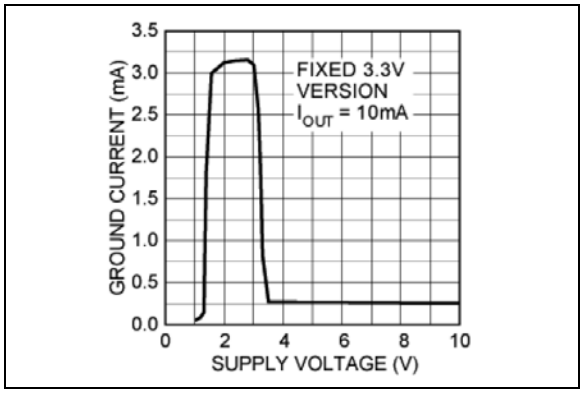

FIGURE 2-67: *MIC2975x Ground Current vs. Supply Voltage.*

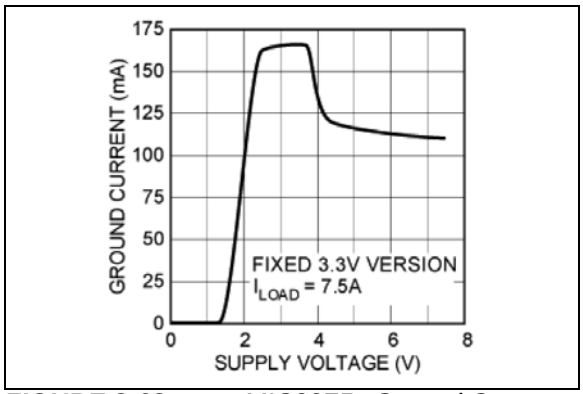

FIGURE 2-68: *MIC2975x Ground Current vs. Supply Voltage.*

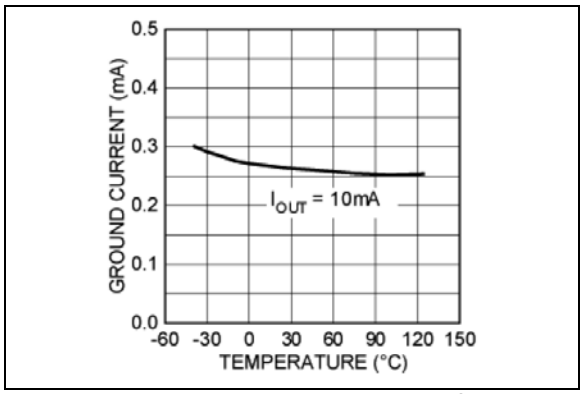

FIGURE 2-69: *MIC2975x Ground Current vs. Temperature.*

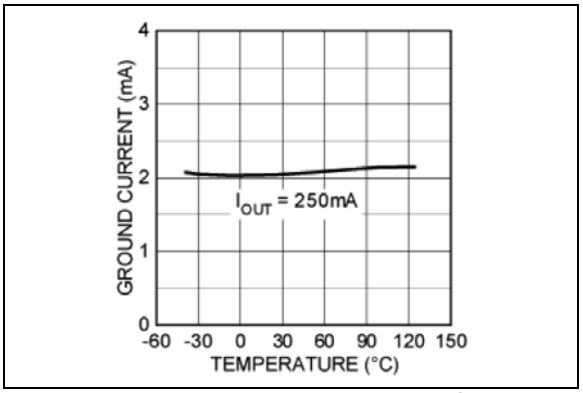

FIGURE 2-70: *MIC2975x Ground Current vs. Temperature.*

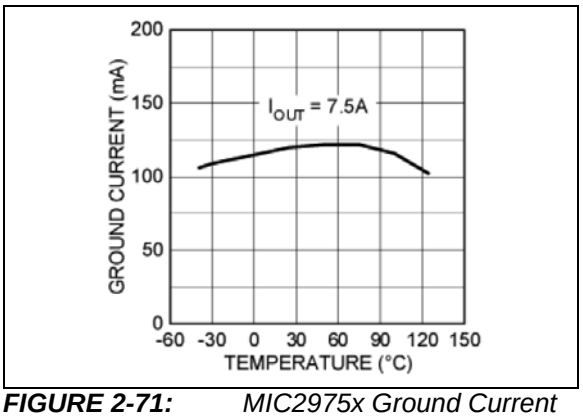

FIGURE 2-71: *MIC2975x Ground Current vs. Temperature.*

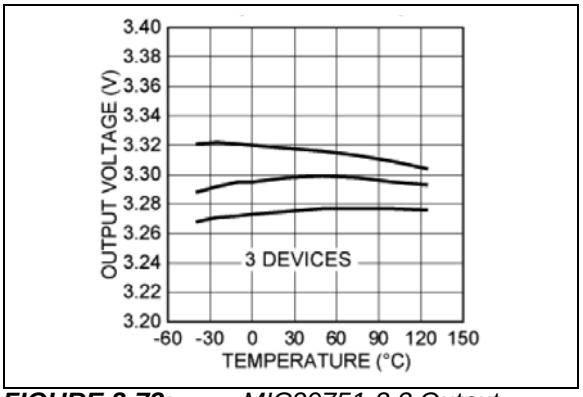

FIGURE 2-72: *MIC29751-3.3 Output Voltage vs. Temperature.*

© 2016 Microchip Technology Inc.

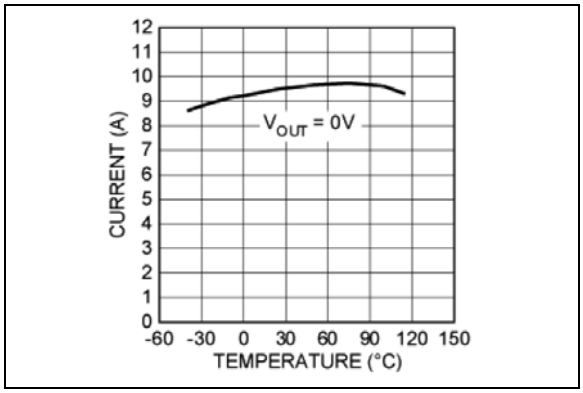

FIGURE 2-73: *MIC29751-5.0 Short-Circuit Current vs. Temperature.*

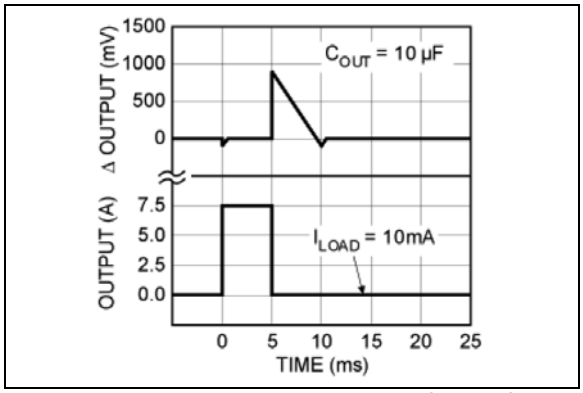

FIGURE 2-76: *MIC2975x Load Transient.*

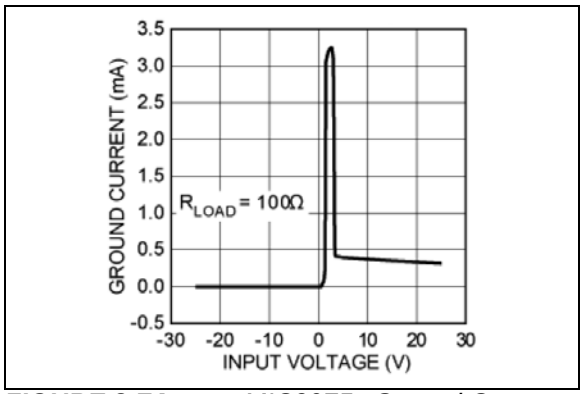

FIGURE 2-74: *MIC2975x Ground Current vs. Input Voltage.*

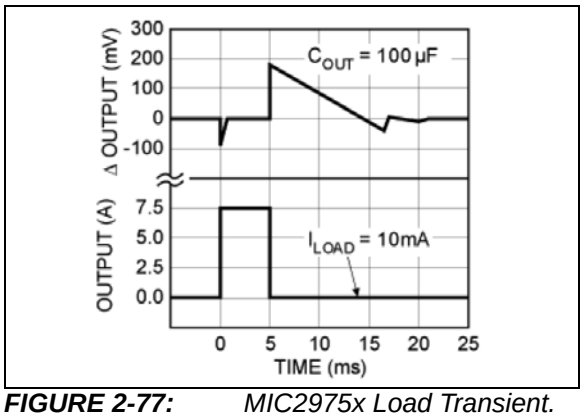

FIGURE 2-77: *MIC2975x Load Transient.*

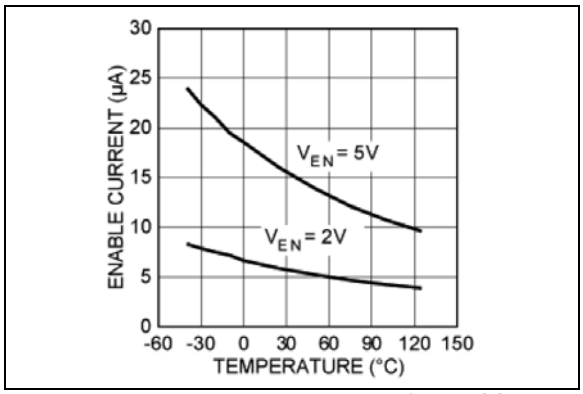

FIGURE 2-75: *MIC29751-xx/2 Enable Current vs. Temperature.*

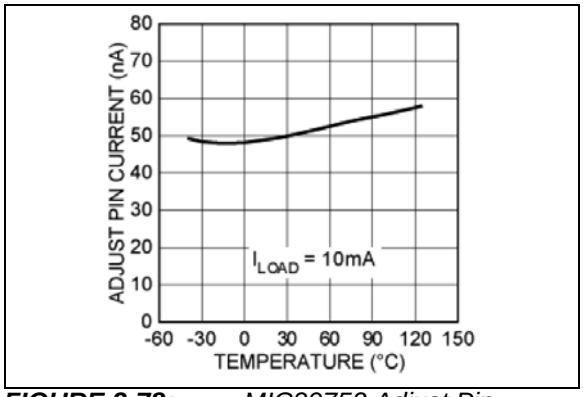

FIGURE 2-78: *MIC29752 Adjust Pin Current vs. Temperature.*

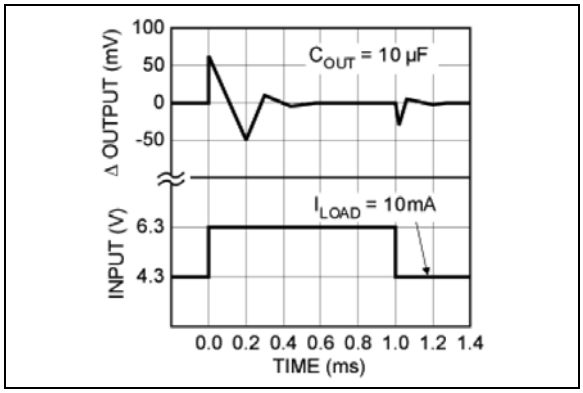

FIGURE 2-79: *MIC2975x Line Transient.*

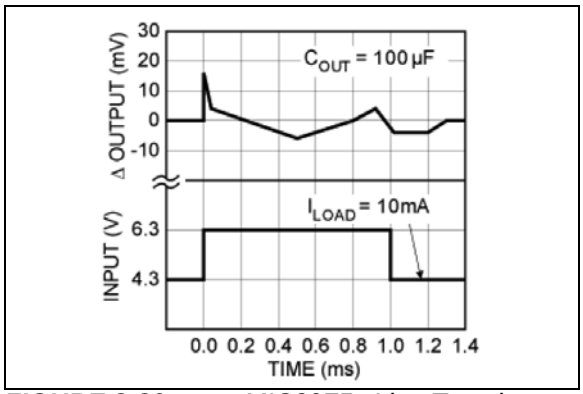

FIGURE 2-80: *MIC2975x Line Transient.*

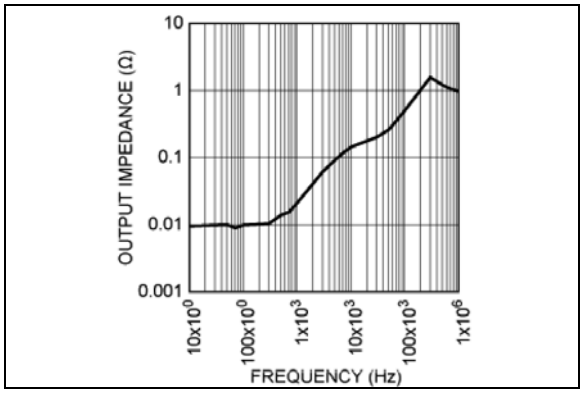

FIGURE 2-81: *MIC2975x Output Impedance vs. Frequency.*

© 2016 Microchip Technology Inc.

3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 3-1 and Table 3-2.

TABLE 3-1: PIN FUNCTION TABLE

Pin Number TO-220 TO-263	Pin Name	Description
1	INPUT	Supplies the current to the output power device.
2	GND	TAB is also connected internally to the IC's ground on D-PAK.
3	OUTPUT	The regulator output voltage.

TABLE 3-2: PIN FUNCTION TABLE

Pin Number Fixed TO-220 TO-247 TO-263	Pin Number Adjustable TO-220 TO-247 TO-252 TO-263	Pin Number Adj. w/ Flag TO-220 TO-247 TO-263	Pin Name	Description
1	1	—	ENABLE	CMOS compatible control input. Logic-high = enable, logic-low = shutdown.
2	2	2	INPUT	Supplies the current to the output power device.
3, TAB	3, TAB	3, TAB	GND	TAB is also connected internally to the IC's ground on D-PAK.
4	4	4	OUTPUT	The regulator output voltage.
—	5	5	ADJUST	Adjustable regulator feedback input that connects to the resistor voltage divider that is placed from OUTPUT to GND in order to set the output voltage.
5	—	1	FLAG	Active-low error flag output signal that indicates an output fault condition.

4.0 APPLICATION INFORMATION

The MIC2915x, MIC2930x, MIC2950x, and MIC2975x are high-performance low-dropout voltage regulators suitable for all moderate to high-current voltage regulator applications. Their 350 mV to 425 mV typical dropout voltage at full load make them especially valuable in battery powered systems and as high efficiency noise filters in post-regulator applications. Unlike older NPN-pass transistor designs, where the minimum dropout voltage is limited by the base-emitter voltage drop and collector-emitter saturation voltage, dropout performance of the PNP output of these devices is limited merely by the low VCE saturation voltage.

A trade-off for the low-dropout voltage is a varying base driver requirement. But Microchip's Super ßeta PNP process reduces this drive requirement to merely 1% of the load current.

The MIC2915x/2930x/2950x/2975x family of regulators are fully protected from damage due to fault conditions. Current limiting is provided. This limiting is linear; output current under overload conditions is constant. Thermal shutdown disables the device when the die temperature exceeds the +125°C maximum safe operating temperature. Line transient protection allows device and load survival even when the input voltage spikes between –20V and +60V. When the input voltage exceeds approximately 32V, the overvoltage sensor disables the regulator. The output structure of these regulators allows voltages in excess of the desired output voltage to be applied without reverse current flow. MIC29xx1 and MIC29xx2 versions offer a logic-level ON/OFF control. When disabled, the devices draw nearly zero current.

An additional feature of this regulator family is a common pinout. A design's current requirement may change up or down, but use the same board layout because all of these regulators have identical pinouts.

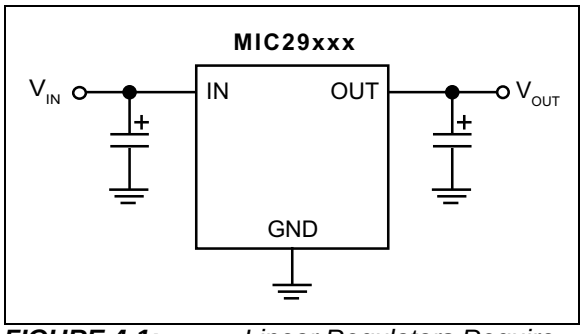

FIGURE 4-1: *Linear Regulators Require Only Two Capacitors for Operation.*

4.1 Thermal Design

Linear regulators are simple to use. The most complicated design parameters to consider are thermal characteristics. Thermal design requires the following application-specific parameters:

- Maximum Ambient Temperature, T_A
- Output Current, I_{OUT}
- Output Voltage, V_{OUT}
- Input Voltage, V_{IN}

First, calculate the power dissipation of the regulator from these numbers and the device parameters from this data sheet.

EQUATION 4-1:

$$P_D = I_{OUT}(1.01(V_{IN} - V_{OUT}))$$

The ground current is approximated by 1% of I_{OUT}. Then the heat sink thermal resistance is determined with Equation 4-2.

EQUATION 4-2:

$$\theta_{SA} = \frac{T_{JMAX} - T_A}{P_D} - (\theta_{JC} + \theta_{CS})$$

Where:

T_{JMAX} ≤ 125°C

θ_{CS} Between 0°C/W and 2°C/W

The heat sink may be significantly reduced in applications where the minimum input voltage is known and is large compared with the dropout voltage. Use a series input resistor to drop excessive voltage and distribute the heat between this resistor and the regulator. The low-dropout properties of Super ßeta PNP regulators allow very significant reductions in regulator power dissipation and the associated heat sink without compromising performance. When this technique is employed, a capacitor of at least 0.1 µF is needed directly between the input and regulator ground.

Please refer to Application Note 9 and Application Hint 17 for further details and examples on thermal design and heat sink specification.

With no heat sink in the application, calculate the junction temperature to determine the maximum power dissipation that will be allowed before exceeding the maximum junction temperature of the MIC29152. The maximum power allowed can be calculated using the

© 2016 Microchip Technology Inc.

thermal resistance (θ_{JA}) of the D-Pak adhering to the following criteria for the PCB design: 2 oz. copper and 100 mm^2 copper area for the MIC29152.

For example, given an expected maximum ambient temperature (T_A) of +75°C with V_{IN} = 3.3V, V_{OUT} = 2.5V, and I_{OUT} = 1.5A, first calculate the expected P_D using Equation 4-3:

EQUATION 4-3:

$$P_D = (3.3V - 2.5V) \times 1.5A - (3.3V \times 0.016A) = 1.1472W$$

Next, calculate the junction temperature for the expected power dissipation.

EQUATION 4-4:

$$T_J = (\theta_{JA} \times P_D) + T_A$$
$$= (56^oC/W \times 1.1472W) + 75^oC = 139.24^oC$$

Now determine the maximum power dissipation allowed that would not exceed the IC's maximum junction temperature (+125°C) without the use of a heat sink.

EQUATION 4-5:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) \div \theta_{JA}$$
$$= (125^oC - 75^oC) \div 56^oC/W = 0.893W$$

4.2 Capacitor Requirements

For stability and minimum output noise, a capacitor on the regulator output is necessary. The value of this capacitor is dependent upon the output current; lower currents allow smaller capacitors. The MIC2915x/2930x/2950x/2975x regulators are stable with the following minimum capacitor values at full load, as noted in Table 4-1.

TABLE 4-1: MINIMUM CAPACITOR VALUES AT FULL LOAD

Device	Full-Load Capacitor
MIC2915x	10 µF
MIC2930x	10 µF
MIC2950x	10 µF
MIC2975x	22 µF

This capacitor need not be an expensive low ESR type: aluminum electrolytics are adequate. In fact, extremely low ESR capacitors may contribute to instability. Tantalum capacitors are recommended for systems where fast load transient response is important.

Where the regulator is powered from a source with high AC impedance, a 0.1 µF capacitor connected between Input and GND is recommended. This capacitor should have good characteristics to above 250 kHz.

4.3 Minimum Load Current

The MIC2915x–2975x regulators are specified between finite loads. If the output current is too small, leakage currents dominate and the output voltage rises. The following minimum load current swamps any expected leakage current across the operating temperature range, as shown in Table 4-2.

TABLE 4-2: MINIMUM LOAD CURRENTS

Device	Minimum Load
MIC2915x	5 mA
MIC2930x	7 mA
MIC2950x	10 mA
MIC2975x	10 mA

4.4 Adjustable Regulator Design

The adjustable regulator versions, MIC29xx2 and MIC29xx3, allow programming the output voltage anywhere between 1.25V and the 25V. Two resistors are used. The resistor values are calculated by Equation 4-6.

EQUATION 4-6:

$$R1 = R2 \times \left(\frac{V_{OUT}}{1.240} - 1\right)$$

In the equation above, V_{OUT} is the desired output voltage. Figure 4-2 shows component definition. Applications with widely varying load currents may scale the resistors to draw the minimum load current required for proper operation (see the Minimum Load Current sub-section).

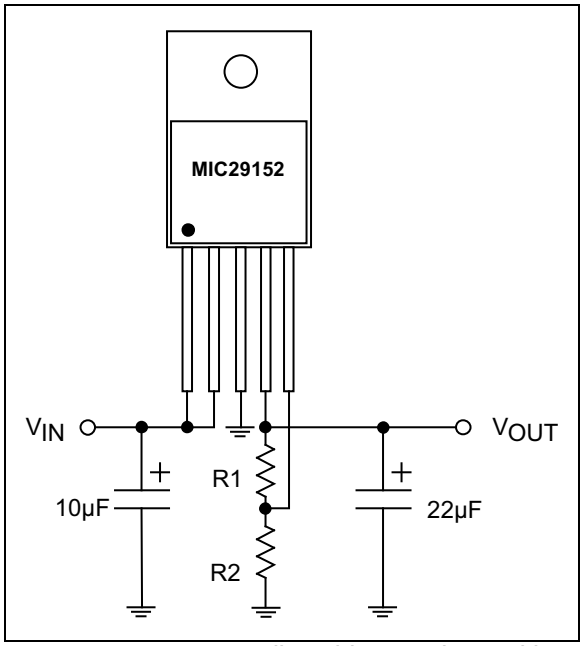

FIGURE 4-2: *Adjustable Regulator with Resistors.*

4.5 Error Flag

MIC29xx1 and MIC29xx3 versions feature an Error Flag, which looks at the output voltage and signals an error condition when this voltage drops 5% below its expected value. The error flag is an open-collector output that pulls low under fault conditions. It may sink 10 mA. Low output voltage signifies a number of possible problems, including an overcurrent fault (the device is in current-limit) and low input voltage. The flag output is inoperative during overtemperature shutdown conditions.

4.6 Enable Input

MIC29xx1 and MIC29xx2 versions feature an enable (EN) input that allows ON/OFF control of the device. Special design allows “zero” current drain when the device is disabled; only microamperes of leakage current flows. The EN input has TTL/CMOS compatible thresholds for simple interfacing with logic, or may be directly tied to ≤30V. Enabling the regulator requires approximately 20 µA of current.

© 2016 Microchip Technology Inc.

5.0 PACKAGING INFORMATION

5.1 Package Marking Information

3- and 5-Pin TO-263 (Fixed)*

Example

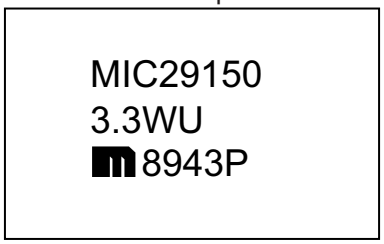

5-Pin TO-263 (Adjustable)*

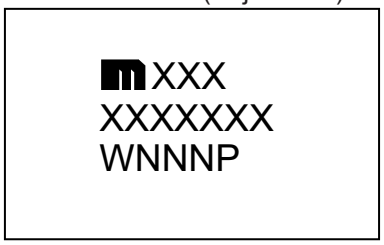

Example

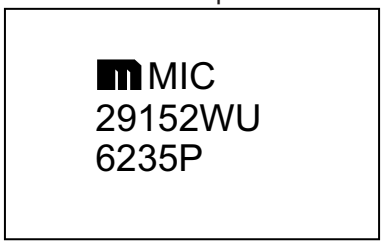

3- and 5-Pin TO-220 (Fixed)*

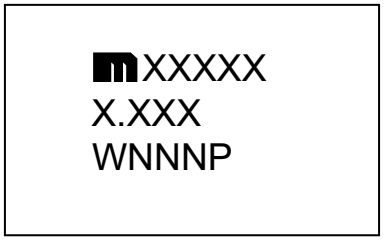

Example

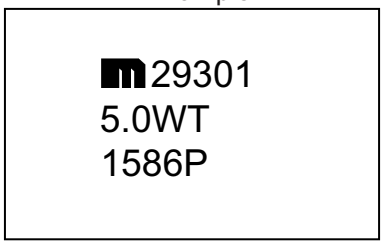

5-Pin TO-220 (Adjustable)*

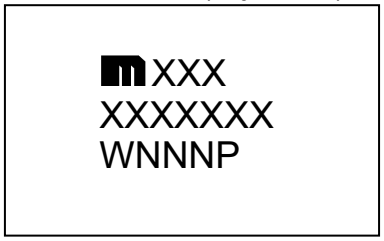

Example

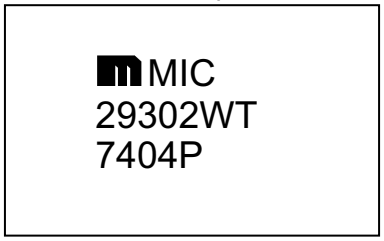

5-Pin TO-252*

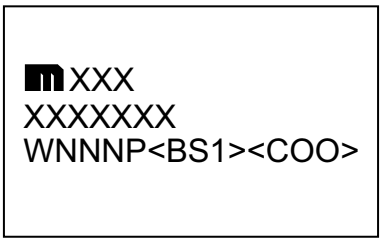

Example

5-Pin TO-247 (Fixed)*

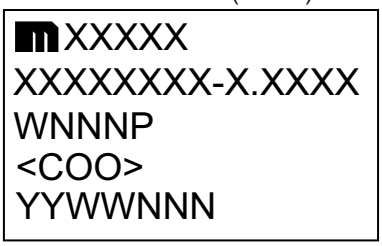

Example

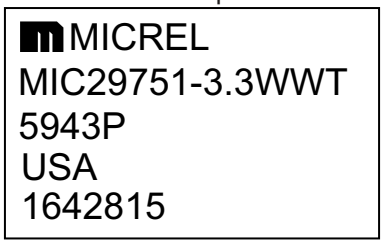

5-Pin TO-247 (Adjustable)*

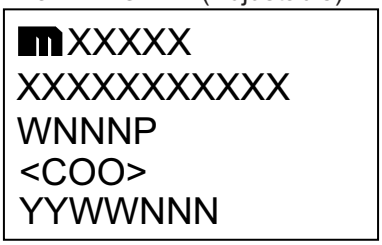

Example

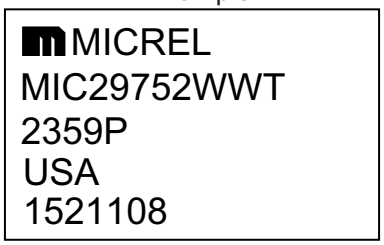

Legend:	XX...X	Product code or customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week '01')
	NNN	Alphanumeric traceability code
	(e3)	Pb-free JEDEC® designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.
	●, ▲, ▼	Pin one index is identified by a dot, delta up, or delta down (triangle mark).

Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.

Underbar (_) and/or Overbar (¯) symbol may not be to scale.

© 2016 Microchip Technology Inc.

3-Lead TO-220 Package Outline and Recommended Land Pattern

TITLE
3 LEAD TO220 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

DRAWING #	TO220-3LD-PL-1	**UNIT**	INCH
Lead Frame	Copper Alloy	**Lead Finish**	Matte Tin

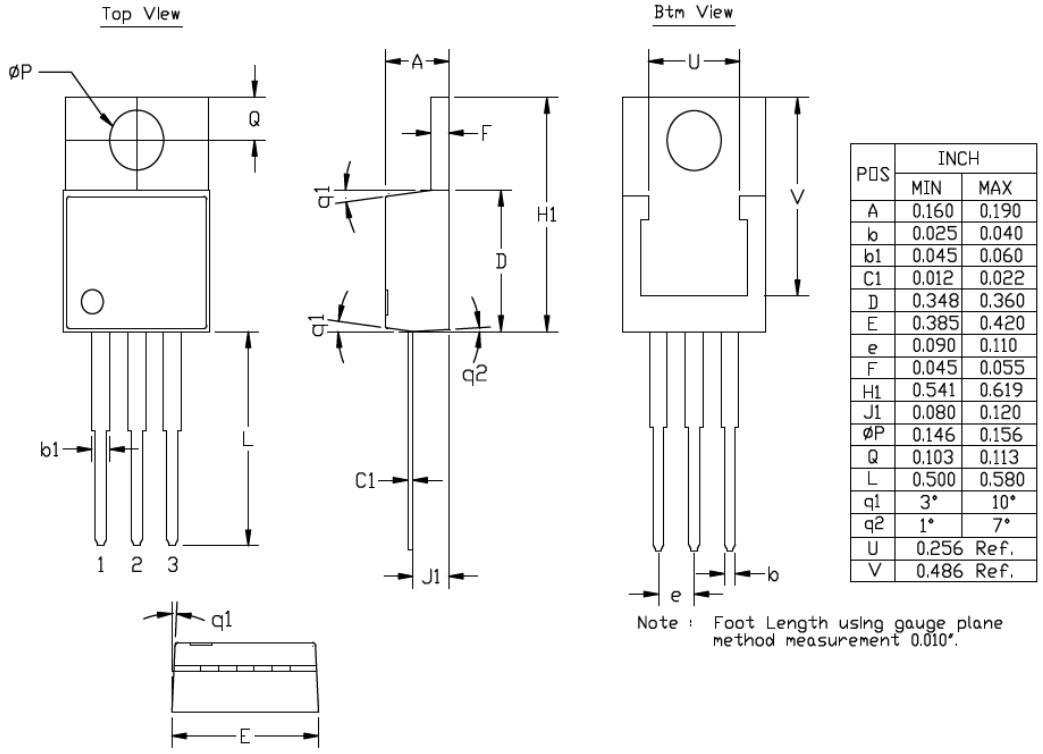

POS	INCH	
	MIN	MAX
A	0.160	0.190
b	0.025	0.040
b1	0.045	0.060
C1	0.012	0.022
D	0.348	0.360
E	0.385	0.420
e	0.090	0.110
F	0.045	0.055
H1	0.541	0.619
J1	0.080	0.120
øP	0.146	0.156
Q	0.103	0.113
L	0.500	0.580
q1	3°	10°
q2	1°	7°
U	0.256 Ref.	
V	0.486 Ref.	

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

5-Lead TO-220 Package Outline and Recommended Land Pattern

TITLE
5 LEAD TO220 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

DRAWING #	TO220-5LD-PL-1	**UNIT**	INCH
Lead Frame	Copper Alloy	**Lead Finish**	Matte Tin

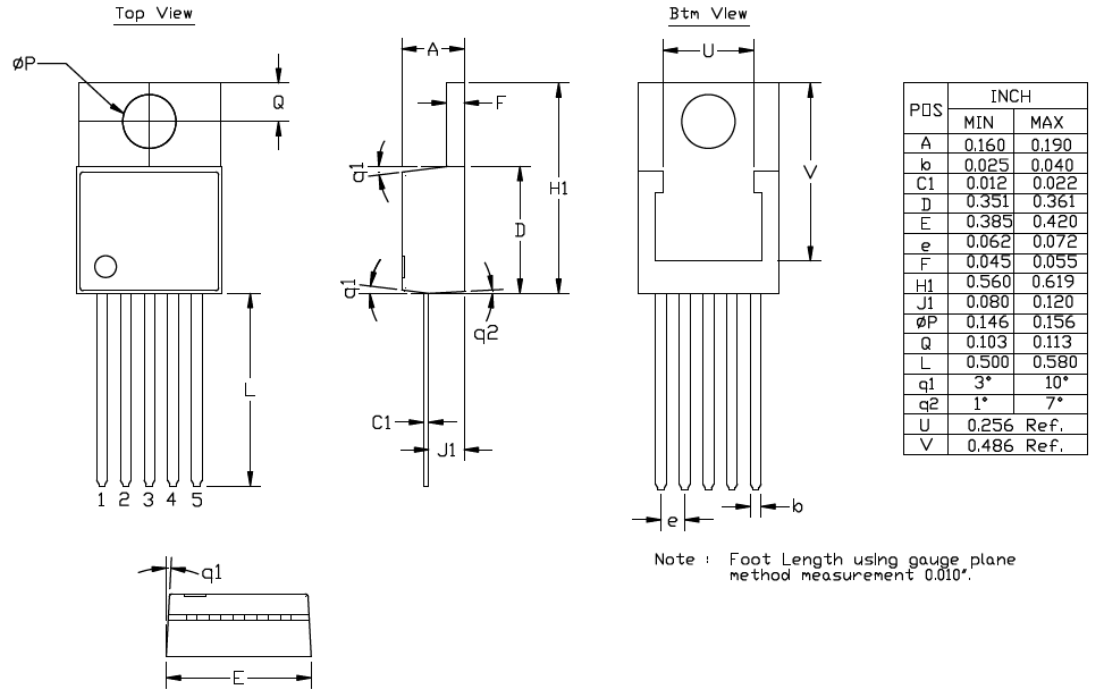

POS	INCH	
	MIN	MAX
A	0.160	0.190
b	0.025	0.040
C1	0.012	0.022
D	0.351	0.361
E	0.385	0.420
e	0.062	0.072
F	0.045	0.055
H1	0.560	0.619
J1	0.080	0.120
øP	0.146	0.156
Q	0.103	0.113
L	0.500	0.580
q1	3°	10°
q2	1°	7°
U	0.256 Ref.	
V	0.486 Ref.	

Note : Foot Length using gauge plane method measurement 0.010".

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

© 2016 Microchip Technology Inc.

5-Lead TO-263 Package Outline and Recommended Land Pattern

TITLE
5 LEAD T0263 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

DRAWING #	T0263-5LD-PL-1	**UNIT**	INCH/MM

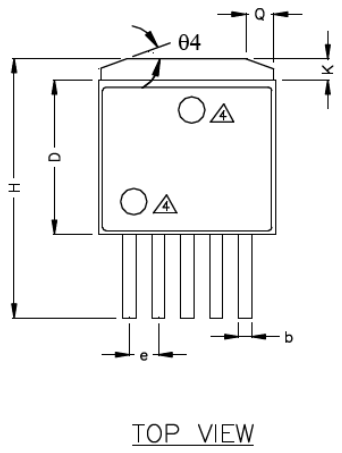

TOP VIEW

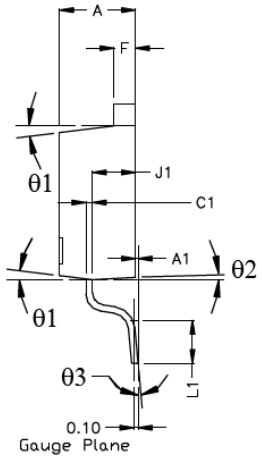

SIDE VIEW 1

POS	INCH		MM	
	MIN	MAX	MIN	MAX
A	0.170	0.181	4.318	4.597
A1	0.000	0.012	0.000	0.305
b	0.026	0.036	0.660	0.914
C1	0.012	0.023	0.305	0.584
D	0.330	0.361	8.392	9.169
E	0.396	0.420	10.058	10.668
e	0.062	0.072	1.575	1.829
F	0.045	0.055	1.143	1.397
H	0.575	0.625	14.605	15.875
J1	0.080	0.120	2.032	3.048
K	0.045	0.066	1.143	1.676
L1	0.090	0.110	2.286	2.794
θ1	3°	10°	3°	10°
θ2	1°	7°	1°	7°
θ3	0°	8°	0°	8°
θ4	18°	22°	18°	22°
Q	0.055	0.075	1.397	1.905
U	0.256 Ref.		6.502 Ref.	
V	0.305 Ref.		7.747 Ref.	



BOTTOM VIEW



SIDE VIEW 2

NOTE:
1. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR.
2. PACKAGE OUTLINE INCLUSIVE OF PLATING THICKNESS.
3. FOOT LENGTH USING GAUGE PLANE METHOD MEASUREMENT 0.010"
4. PACKAGE TOP MARK MAY BE IN TOP CENTER OR LOWER LEFT CORNER
5. ALL DIMENSIONS ARE IN INCHES/MILLIMETERS.

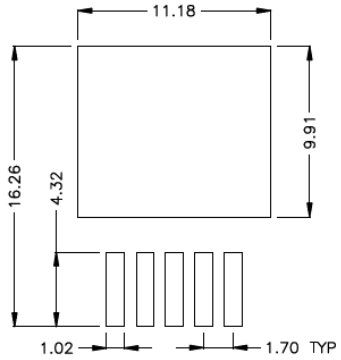

RECOMMENDED LAND PATTERN
(UNIT : mm)

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

3-Lead TO-263 Package Outline and Recommended Land Pattern

TITLE
3 LEAD TO263 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

DRAWING #	TO263-3LD-PL-1	**UNIT**	INCH/MM

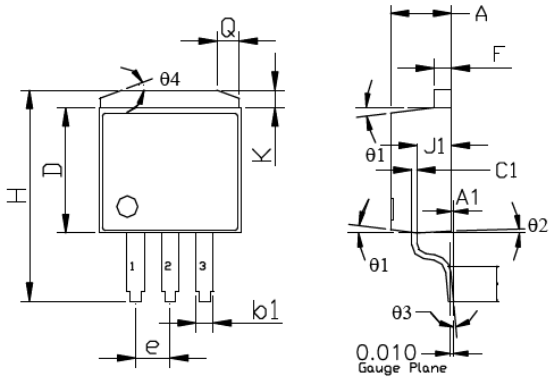

	INCH		MM	
POS	MIN	MAX	MIN	MAX
A	0.170	0.181	4.318	4.597
A1	0.000	0.012	0.000	0.305
b1	0.047	0.053	1.194	1.346
C1	0.012	0.023	0.305	0.584
D	0.330	0.361	8.382	9.169
E	0.396	0.420	10.058	10.668
e	0.095	0.105	2.413	2.667
F	0.045	0.055	1.143	1.397
H	0.575	0.625	14.605	15.875
J1	0.080	0.120	2.032	3.048
L1	0.090	0.110	2.286	2.794
K	0.045	0.066	1.143	1.676
θ1	3°	10°	3°	10°
θ2	1°	7°	1°	7°
θ3	0°	8°	0°	8°
θ4	18°	22°	18°	22°
Q	0.055	0.075	1.397	1.905
U	0.256 Ref.		6.502 Ref.	
V	0.303 Ref.		7.696 Ref.	

TOP VIEW

SIDE VIEW 1

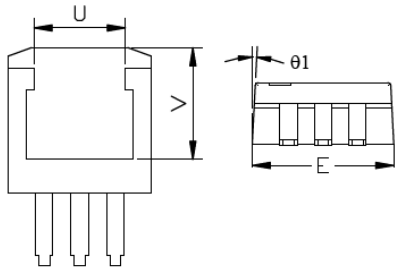

BOTTOM VIEW

SIDE VIEW 2

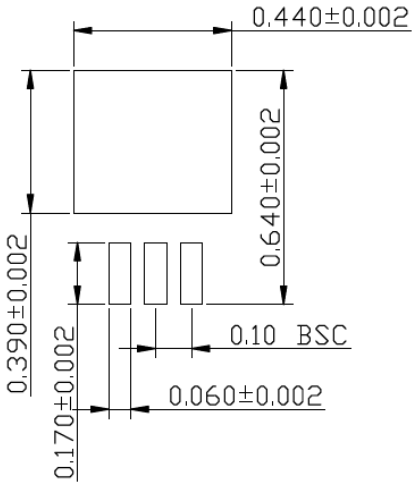

RECOMMENDED LAND PATTERN (UNIT: INCH)

NOTES:
FOOT LENGTH USE GUAGE PLANE METHOD MEASUREMENT 0.010"

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

© 2016 Microchip Technology Inc.

5-Lead TO-247 Package Outline and Recommended Land Pattern

TITLE
5 LEAD TO247 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

DRAWING #	TO247-5LD-PL-1	**UNIT**	INCH/ MM
Lead Frame	Copper Alloy	**Lead Finish**	Matte Tin

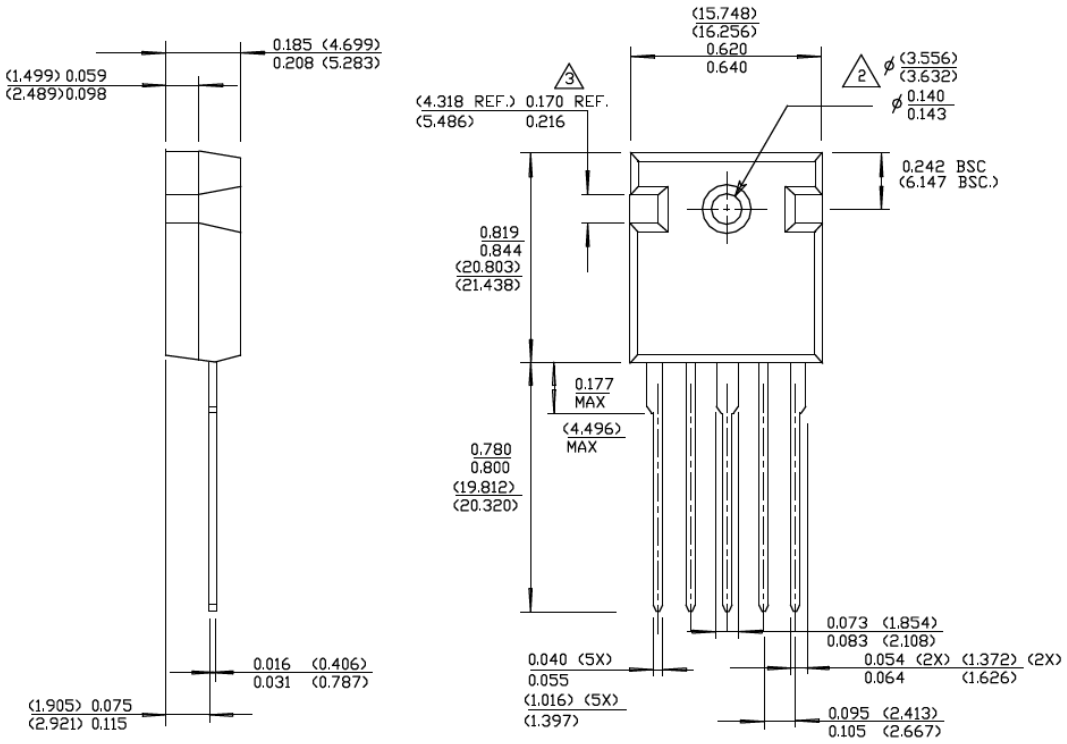

NOTE

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BLANKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

5-Lead TO-252 Package Outline and Recommended Land Pattern

TITLE
5 LEAD TO252 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

DRAWING #	TO252-5LD-PL-1	**UNIT**	INCH/ MM
Lead Frame	Copper Alloy	**Lead Finish**	Matte Tin



TOP VIEW

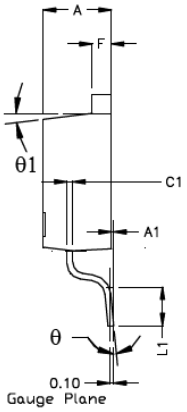

SIDE VIEW 1

POS	INCH		MM	
	MIN	MAX	MIN	MAX
A	0.087	0.094	2.210	2.387
A1	0.000	0.012	0.000	0.305
b	0.023	0.026	0.584	0.660
C1	0.012	0.023	0.305	0.584
D	0.236	0.241	6.000	6.200
E	0.252	0.260	6.400	6.604
e	0.045	0.055	1.143	1.397
F	0.019	0.023	0.483	0.584
H	0.378	0.402	9.601	10.210
K	0.039	0.047	1.000	1.200
L1	0.055	0.065	1.397	1.651
θ	0°	8°	0°	8°
θ1	3°	10°	3°	10°
Q	0.055	0.075	1.397	1.905
U	0.206 Ref.		5.232 Ref.	
V	0.213 Ref.		5.415 Ref.	



BOTTOM VIEW



SIDE VIEW 2



REOMMENDED LAND PATTERN
NOTE: unit in mm

NOTE:
1. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR.
2. PACKAGE OUTLINE INCLUSIVE OF PLATING THICKNESS.
3. FOOT LENGTH USING GAUGE PLANE METHOD MEASUREMENT 0.010"
4. ALL DIMENSIONS ARE IN INCHES/MILLIMETERS.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

© 2016 Microchip Technology Inc.

APPENDIX A: REVISION HISTORY

Revision A (December 2016)

- Converted Micrel document MIC2915x/30x/50x/75x to Microchip data sheet DS20005685A.
- Minor text changes throughout.
- Removed references to the discontinued MIC29750.
- Added Figure 2-41, Figure 2-42, and Figure 2-43.
- Removed the 3-Pin TO-247 package option.

NOTES:

© 2016 Microchip Technology Inc.

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

PART NO.	–	XX	X	X	–	XX
Device		Voltage	Junction Temperature Range	Package		Media Type

Device:	MIC2915x:	1.5A High-Current Low-Dropout Regulator
	MIC2930x:	3A High-Current Low-Dropout Regulator
	MIC2950x:	5A High-Current Low-Dropout Regulator
	MIC2975x:	7.5A High-Current Low-Dropout Regulator
Voltage:	3.3 =	3.3V
	5.0 =	5.0V
	12 =	12V
	(blank) =	Adjustable
Junction Temperature Range:	W =	–40°C to +125°C
Package:	U =	3-Lead or 5-Lead TO-263
	T =	3-Lead or 5-Lead TO-220
	D =	5-Lead TO-252
	WT =	5-Lead TO-247
Media Type:	TR =	2,500/Reel for D and WT Packages
	TR =	750/Reel for U Package
	(blank)=	50/Tube for U, T, and D Packages
	(blank)=	30/Tube for WT Package

Examples:

a) MIC29150-3.3WT: 1.5A High-Current Low-Dropout Regulator, 3.3V, –40°C to +125°C Temperature Range, 3-Lead TO-220, 50/Tube

b) MIC29152WD-TR: 1.5A High-Current Low-Dropout Regulator, Adjustable Voltage, –40°C to +125°C Temperature Range, 5-Lead TO-252, 2,500/Reel

c) MIC29302WU: 3A High-Current Low-Dropout Regulator, Adjustable Voltage, –40°C to +125°C Temperature Range, 5-Lead TO-263, 50/Tube

d) MIC29301-12WU-TR: 3A High-Current Low-Dropout Regulator, 12V, –40°C to +125°C Temperature Range, 5-Lead TO-263, 750/Reel

e) MIC29500-5.0WT: 5A High-Current Low-Dropout Regulator, 5.0V, –40°C to +125°C Temperature Range, 3-Lead TO-220, 50/Tube

f) MIC29503WT: 5A High-Current Low-Dropout Regulator, Adjustable Voltage, –40°C to +125°C Temperature Range, 5-Lead TO-220, 50/Tube

g) MIC29751-3.3WWT-TR: 7.5A High-Current Low-Dropout Regulator, 3.3V, –40°C to +125°C Temperature Range, 5-Lead TO-247, 2,500/Reel

h) MIC29752WWT: 7.5A High-Current Low-Dropout Regulator, Adjustable Voltage, –40°C to +125°C Temperature Range, 5-Lead TO-247, 30/Tube

Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

NOTES:

© 2016 Microchip Technology Inc.

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE**.** Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
═ ISO/TS 16949 ═

Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BeaconThings, BitCloud, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Heldo, JukeBlox, KEELOQ, KEELOQ logo, Kleer, LANCheck, LINK MD, maXStylus, maXTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, RightTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, CryptoAuthentication, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KleerNet, KleerNet logo, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PureSilicon, QMatrix, RightTouch logo, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2016, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-1236-6

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon

Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-3326-8000
Fax: 86-21-3326-8021

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880- 3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

France - Saint Cloud
Tel: 33-1-30-60-70-00

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-67-3636

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7289-7561

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

© 2016 Microchip Technology Inc.