T1/CEPT/ISDN PRI Interface Transformer

Turns Ratio (± 5%)	1:1.15CT & 1CT:2CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.6	µH
Capacitance ($C_{w/w}$)		30	pF
Primary DC Resistance		0.7	Ohms
Secondary DC Resistance		0.7 & 1.0	Ohms


Primary Pins 14-16 & 6-8 **Isolation 1500 V_{RMS} Min.**

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Parts shipped in anti-static tubes. 33 pieces per tube

Tape & Reel Available

PHYSICAL DIMENSIONS
inches (mm)

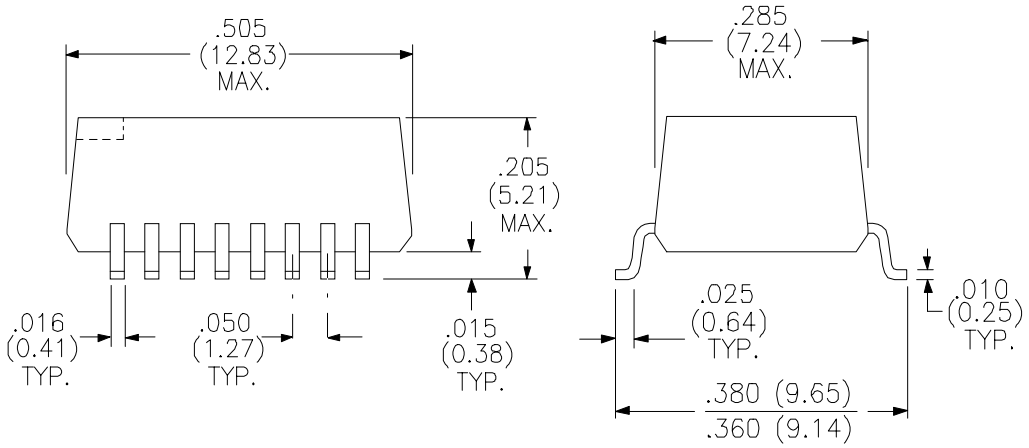

Schematic Diagram

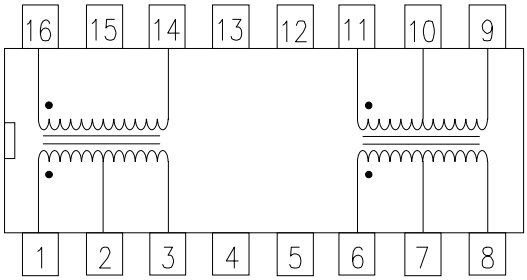

RHOMBUS P/N: **T-14116**	
CUST P/N:	NAME:
DATE: **10/13/95**	SHEET: 1 of 1

Rhombus Industries Inc.
Transformers & Magnetic Products

www.rhombus-ind.com

15801 Chemical Lane,
Huntington Beach, CA 92649-1595
Phone: (714) 898-0960 • FAX: (714) 896-0971