


A  
B  
C  
D  
E  
F  
G  
H

**Extended length is with 500g of force**

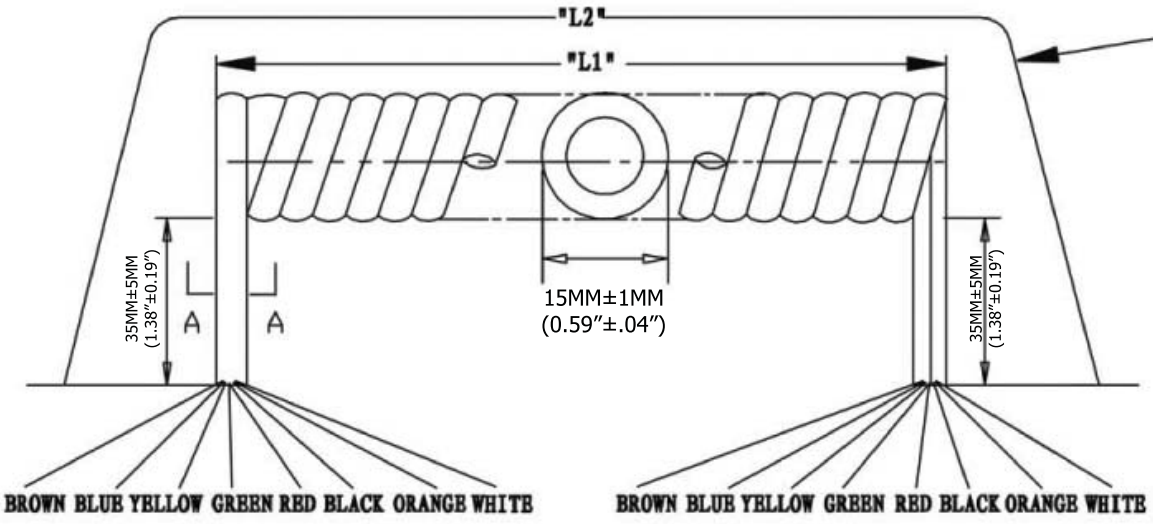


**Material:**

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X43): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

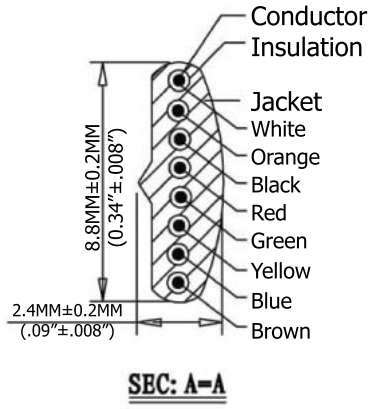

| Extended Length ("L2")      | Typical Retracted Length ("L1") |
|-----------------------------|---------------------------------|
| 168.0 Inches - 193.2 Inches | 78.0 Inches                     |
| 4,267.2MM - 4,907.28MM      | 1,905.0MM                       |

|           |       |  |  |  |  |          |          |  |              |
|-----------|-------|--|--|--|--|----------|----------|--|--------------|
| Scale     | 1:1   |  |  |  |  |          | Name     | Item No.<br><b>AT-K-C-26-8-S/14-R</b>  |              |
| TOLERANCE |       |  |  |  |  |          | Chappell |  |              |
| X.X       | ±0.40 |  |  |  |  | Drawn    | 11.21.11 | Title<br>NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM,<br>Pre-Cut, 14 Ft., Silver |              |
| X.XX      | ±0.25 |  |  |  |  | Approved |          |  |              |
| X.XXX     | ±0.15 |  |  |  |  |          |          |  |              |
| Angle     | ±3°   |  |  |  |  |          |          |  |              |
|           |       |  |  |  |  |          |          | Drawing No.  | <b>rev00</b> |
|           |       |  |  |  |  |          |          | Replace  |              |
|           |       |  |  |  |  |          |          |  |              |
|           |       |  |  |  |  |          |          |  |              |
|           |       |  |  |  |  |          |          |  |              |
|           |       |  |  |  |  |          |          |  |              |

