





RoHS
Compliant
2002/95/EC

HSF

Level-1 Controlled Substances are banned

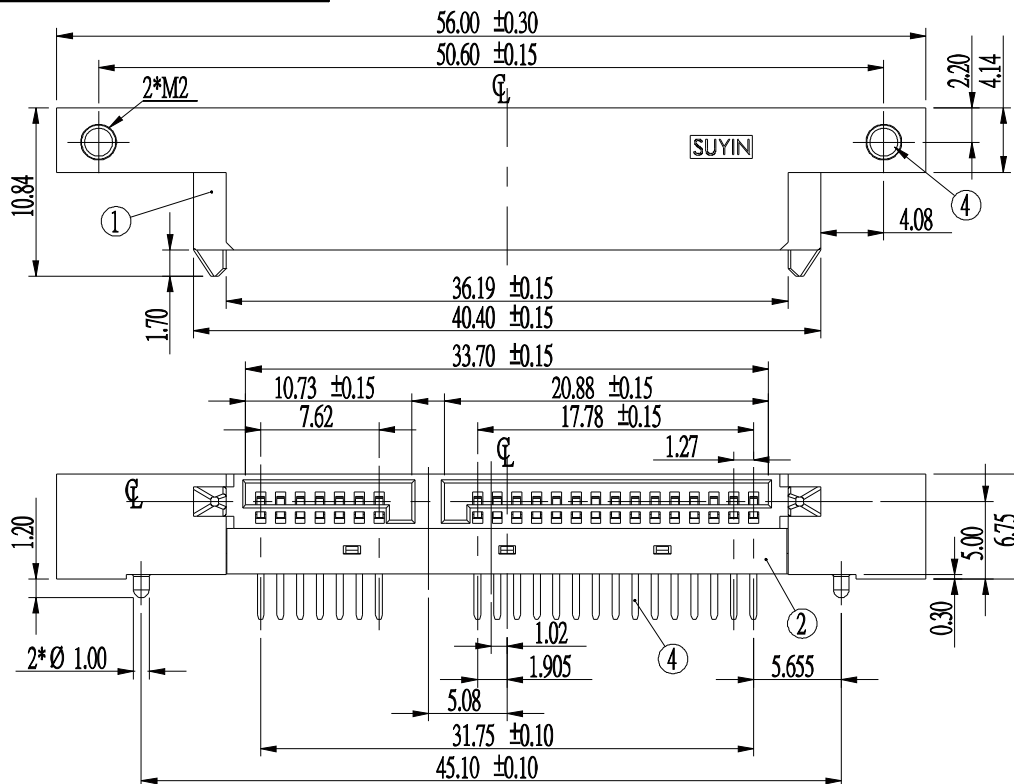

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
DEFAULT THICKNESS=1.20mm (TOLERANCE=±0.05)


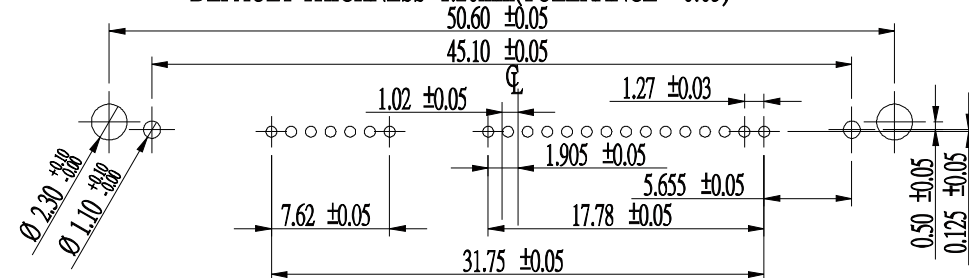


NOTE:

127070FR022GX29ZR

1. PLATING

- G1-50" GOLD OVER NICKEL.
- G2-GOLD FLASH OVER 30 U"MIN. NICKEL.
- G3-10U" GOLD OVER NICKEL.
- G4-15U" GOLD OVER NICKEL.
- G5-30U" GOLD OVER NICKEL.
- G6-50U" GOLD OVER NICKEL.



NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
4	NUT	COPPER ALLOY		NICKEL PLATED
3	TERMINAL	COPPER ALLOY		GOLD PLATED
2	COVER	HIGH TEMP	BLACK	UL 94V-0
1	HOUSING	HIGH TEMP	BLACK	UL 94V-0

SUYIN
CONNECTOR

CUSTOMER COPY	TITLE: 1.27mm PITCH SERIAL ATA CONN.		
PART NO.		127070FR022GX29ZR	
PRODUCT SPEC.		127070FR	
FILE NAME.	D TNG	127070FR022GX29ZR-C	
SCALE	2:1	UNIT:mm	A4 SHEET: 1 of 2

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO.	張裕奇	08/06/23	
	0		NEW RELEASE	徐健龍	張裕奇	Angle 30 ~ ±0.50	DRAW	徐健龍	08/06/23	
	P0	08/03/07	NEW	徐健龍	鄭家奇	10 ~ 30 ±0.30	DESIGN	徐健龍	08/06/23	
				徐健龍	鄭家奇	~ 10 ±0.15	CHECK	唐毅	08/06/23	
							APPRO.	張裕奇	08/06/23	

Original:Draw: 徐健龍 Design: 徐健龍 Check: 唐毅 Appr: 鄭家奇 發行日期: 08/03/07

080307 -BB140