



• **EMX-300 Series**



**FEATURES:**

- Low current consumption
- Compact
- Rich sound





**DIMENSIONS: (Unit: mm)**

**2-PIN(P2) TYPE**


**4-PIN(P4) TYPE**

**L1 TYPE**

**L2 TYPE**

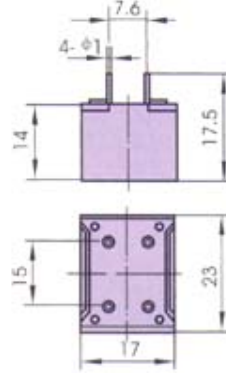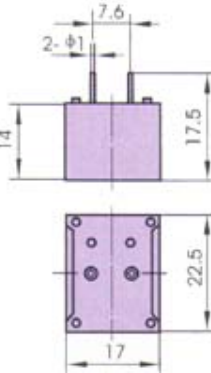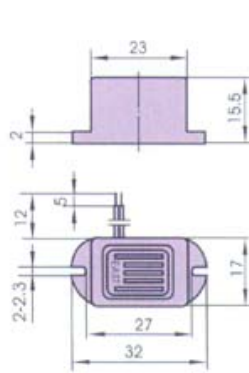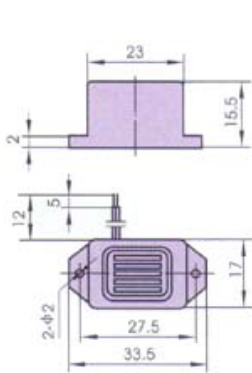

**CHARACTERISTICS:**

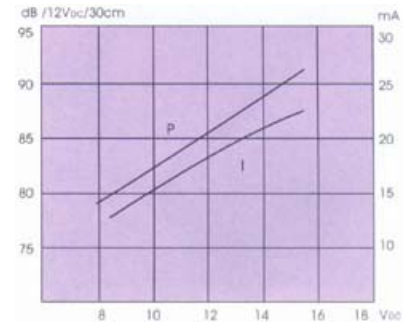

**ELECTRICAL SPECIFICATIONS:**

Model No.	EMX-301L1 /L2/P2/P4	EMX-303L1 /L2/P2/P4	EMX-306L1 /L2/P2/P4	EMX-309L1 /L2/P2/P4	EMX-312L1 /L2/P2/P4	EMX-324L1 /L2/P2/P4
Min. Sound Pressure Level (dB)	70/ Rated Voltage /30cm		75/ Rated Voltage /30cm			
Rated Voltage (V)	1.5	3	6	9	12	24
Operating Voltage (V)	1 ~ 3	2 ~ 4	4 ~ 8	9 ~ 12	9 ~ 15	15 ~ 27
Rated Current (mA)	20	25				30
Resonant Frequency (Hz)	400 ± 50					
Operating Temperature (°C)	-20 ~ +70					
Weight (g)	8					

**PACKING INFORMATION :**

ii	LTYPE	P-TYPE
Packing :	2000 pcs per export carton	1500 pcs per export carton
Carton Size :	47 X 30.5 X 35 cm	47 X 30.5 X 35 cm
G. Weight:	19.5 kgs	14.0 kgs
N. Weight :	18.0 kgs	12.0 kgs