THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

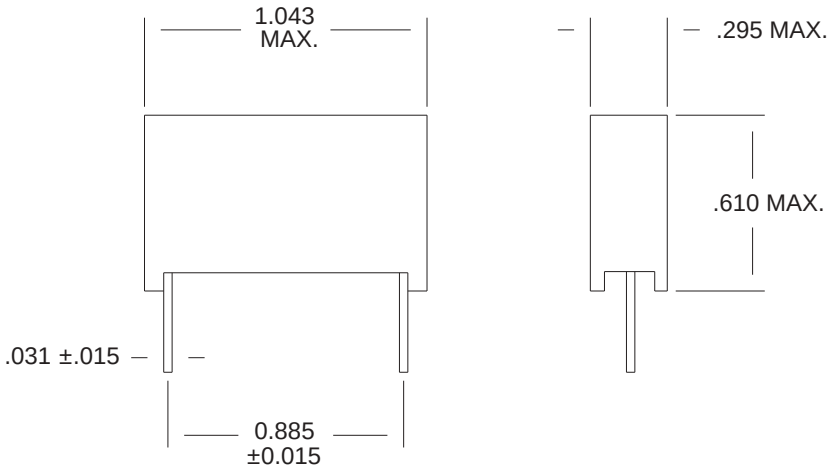

NOTES:

1: CAPACITORS - DIELECTRIC, POLYESTER-FILM.
2: INTERNATIONAL SAFETY AGENCY APPROVALS AND MARKINGS FROM: VDE, SEV, DEMKO, SEMKO, NEMKO, SETI, UL, IMQ, OVE.

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE	250 VAC, 50/60HZ
CAPACITANCE	.15uF, ± 20%
CLASS X2	
DISSIPATION FACTOR	1% MEASURED AT 1 kHz.
MAX. PULSE RATE TIME	Du/Dt ACC.TO VDE 5651 100 V /uSEC.

VICOR ANDOVER, MA. U.S.A.

DRAWN:	10/89
CHECKED:M L S	
APPD:	

AC-CAPACITOR
.15uF, 250VAC, (X2)

ALL DIMENSIONS ARE
IN INCHES
(MILLIMETERS)
DO NOT SCALE DRAWING

TOLERANCES
(EXCEPT AS NOTED)
.XX ± .01
.XXX ± .005
FRACT ±1/64
ANGLES ±1°0

DRAWING NO. 03269

REV. A

NEXT ASSY:

SCALE: NTS

SHEET 1 OF 1