


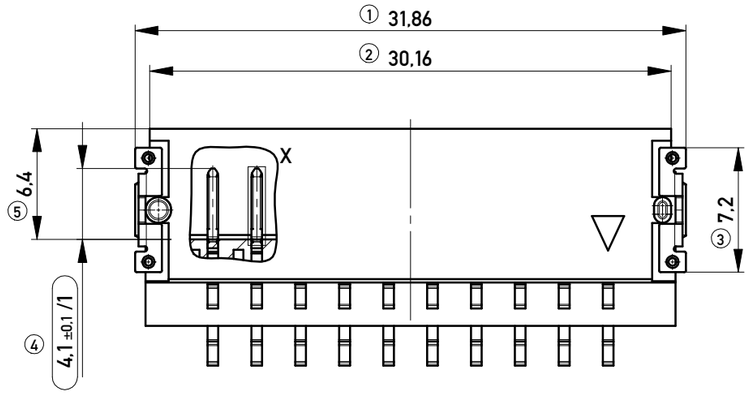


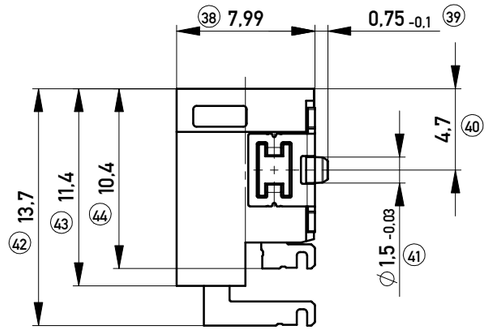


Einzelheit X
M 10:1



Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 380 Stück
Packaging unit: 380 pcs

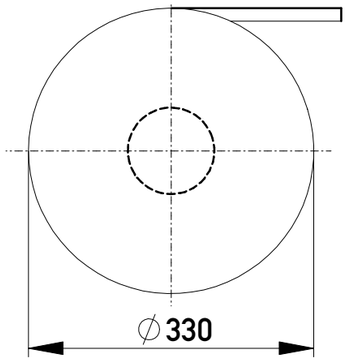

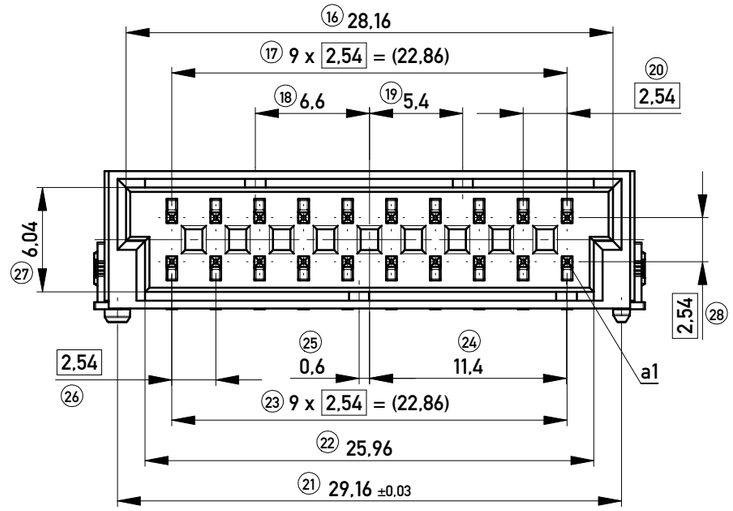


SPC-Maß: Prüfmaße der Kategorie /1
/1 Für SPC-Maße muss eine x/s Regelkarte geführt werden mit Nachweis der Prozessfähigkeit in der Serie (Cpk) oder 100% - Prüfung


Prüfmaß: Prüfmaße der Kategorie /2 und /3
/2 Für Prüfmaße muss eine x/s Regelkarte geführt werden

/3 Prüfmaße werden serienbegleitend geprüft

Abspulrichtung - *Reel off Direction*

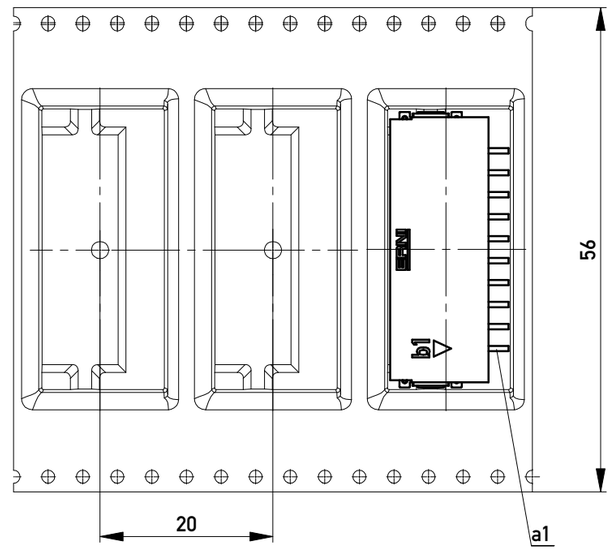

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

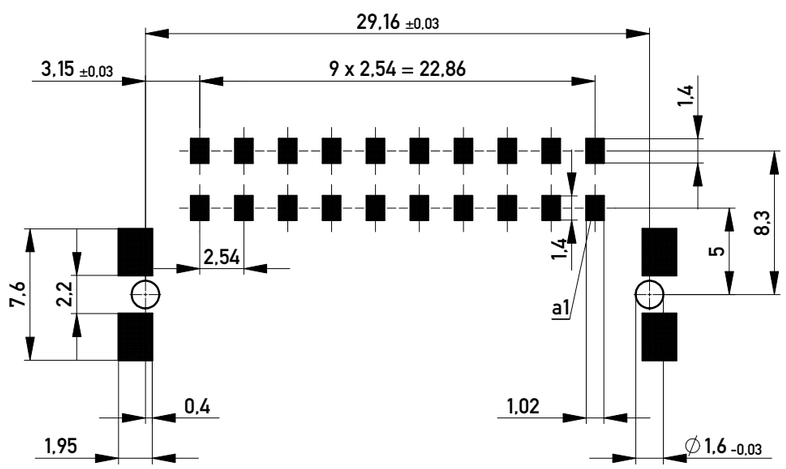

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

㊻ Koplanarität der Anschlüsse ≤ 0,1 mm /2
Coplanarity Area of Termination ≤ 0,1 mm /2

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Dimensions Nr. 1 - 66 unbelegte Nr.: 6-15, 29-37, 45-54, 56-65 Information: Codierung rot - *coding red*	Tolerances All Dimensions in mm	Scale 3:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation M 2,54 DRC-B, 20-polig	
a 05.12.2013 Index Date	www.ERNI.com	104102780001	K A3
		Class DRCB	