
TERMINAL BLOCKS

5mm PITCH 90° MOUNT - LOW PROFILE


- Low profile
- 2-12 Pole interlocking
- UL94V-0 Flame retardant material
- Test probe facility
- 1.5mm^2 wire acceptance
- Screw terminal
- UL/CE approved

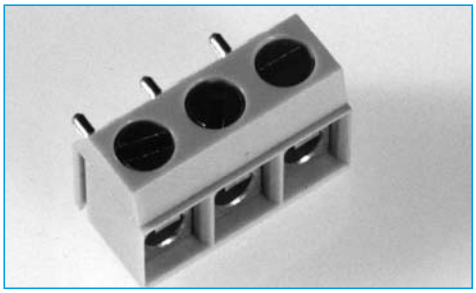

SPECIFICATION

Rating:	16A/150V
Dielectric Strength:	>2KV
Insulation Resistance:	>5MΩ
Working temperature:	-20°C to 125°C
Short Period:	160°
Moulding:	UL94V-0 flame retardant Lexan
Pin/terminal:	5 micron tinned nickel plated brass
Wire Protect:	Tin plated phosphor bronze
Screw/torque:	M2.5 steel/0.4Nm 7 micron zinc colour passivated and tropicalised
Recommended PCB hole size:	ø1.1mm

OUTLINE DRAWING

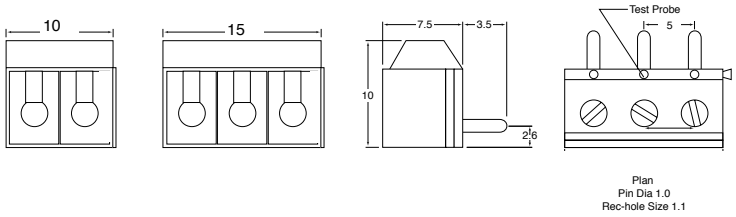

ORDERING INFORMATION


DBC	TB	4	/2
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways 2 = 2 ways 3 = 3 ways

* Other Number of ways are available up to 12
Please consult office for further details

TERMINAL BLOCKS

5mm 45° MOUNT - RISING CLAMP


- 45° Mounting 5mm pitch
- 2-12 Pole interlocking
- Professional series rising clamp - Designed to prevent cable entry below clamp
- 4mm^2 wire acceptance
- Captive screws
- To VDE 0110
- UL/VDE/CE approved

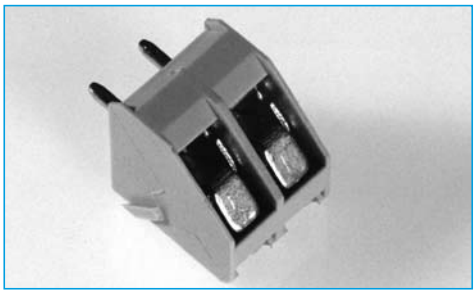

SPECIFICATION

Rating:	17.5A/250V
Dielectric Strength:	>1.25KV
Insulation Resistance:	>5MΩ
Working temperature:	-20°C to 125°C
Short Period:	160°
Moulding:	UL94V-0 flame retardant nylon 66
Pin/terminal:	5 micron tinned nickel plated brass
Rising clamp:	Zinc plated steel
Screw/torque:	M2.5 steel/0.4Nm 7 micron zinc colour passivated and tropicalised
Recommended PCB hole size:	ø1.3mm

OUTLINE DRAWING

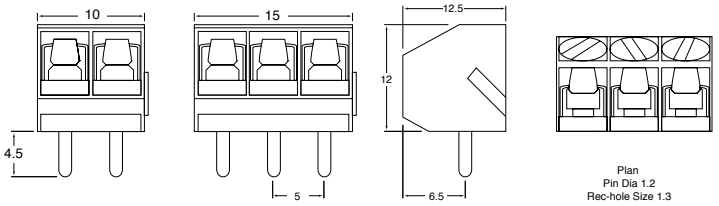

ORDERING INFORMATION

DBC	TB	5	/2
Dubilier Connectors	Series Terminal Block	Style 5=Grey 5A=Black	Nº of Ways 2 = 2 ways 3 = 3 ways

* Other Number of ways are available up to 12
Please consult office for further details