

DUAL T1/CEPT/ISDN-PRI TRANSFORMERS Reinforced Insulation, 3KVrms, surface mount


- MEETS UL 1950, UL1459, IEC950 AND AUSTEL AS3260
- DUAL SURFACE MOUNT CONTAINS TRANSMIT AND RECEIVE XFMRs
- MATCHED TO LEADING TRANSEIVER IC's
- DESIGNED TO MEET ITU-T G.703

ELECTRICAL SPECIFICATIONS: @ 25°C

OPERATING TEMP: 0°C TO 70°C

Part Number	Turns Ratio (Pri:Sec ± 2%)	OCL @ 25°C (mH MIN)	Schematic	Primary Pins
3XF0013-W19	1CT:1CT & 1CT:1CT	1.20 & 1.20	1	1-3, 6-8
3XF0013-W15	1CT:1CT & 1CT:2CT	1.20 & 1.20	1	1-3, 6-8
3XF0013-W40	1CT:1.15CT & 1CT:1CT	1.60 & 1.60	1	16-14, 6-8
3XF0013-W12	1CT:1.15CT & 1CT:1.15CT	1.20 & 1.20	1	1-3, 6-8
3XF0013-W4	1CT:1.15CT & 1CT:2CT	1.50 & 1.20	1	16-14, 6-8
3XF0013-W41	1CS:1CS & 1CS:1.36CS	1.20 & 1.20	2	1-4, 5-8
3XF0013-W42	1CT:1CT & 1CT:1.36CT	1.20 & 1.20	1	1-3, 6-8
3XF0013-W43	1CT:1.36CT & 1CT:1.36CT	1.20 & 1.20	1	1-3, 6-8
3XF0013-W13	1CT:1.41CT & 1CT:1.41CT	1.20 & 1.20	1	16-14, 11-9
3XF0013-W20	1CT:1.41CT & 1CT:1.41CT	1.20 & 1.20	1	1-3, 11-9
3XF0013-W9	1CT:2CT & 1CT:1.08CT	1.20 & 1.20	1	16-14, 6-8
3XF0013-W8	1CT:2CT & 1CT:1.14CT	1.20 & 1.20	1	16-14, 6-8
3XF0013-W2	1CT:2CT & 1CT:1.36CT	1.20 & 1.20	1	16-14, 6-8
3XF0013-W16	1CT:2CT & 1CT:2CT	1.20 & 1.20	1	16-14, 6-8
3XF0013-W44	1CT:2CT & 2CT:1CT	1.60 & 1.60	1	1-3, 6-8
3XF0013-W45	1CT:2.3CT & 1CT:2CT	1.20 & 1.20	1	16-14, 6-8
3XF0013-W5	1CT:1/1.26 & 1CT:2CT	1.50 & 1.20	1	16-14, 6-8
3XF0013-W46	1CT:1.31CT & 2.62CT:1CT	1.20 & 1.20	1	1-3, 6-8
3XF0013-W11	1CT:1.26CT & 1.58CT:1CT	0.80 & 0.80	1	1-3, 6-8

Dimensions:

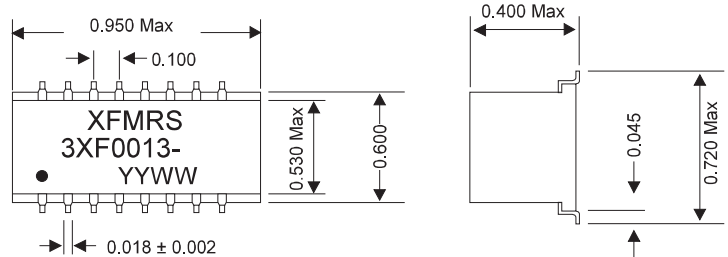

Schematics:

