
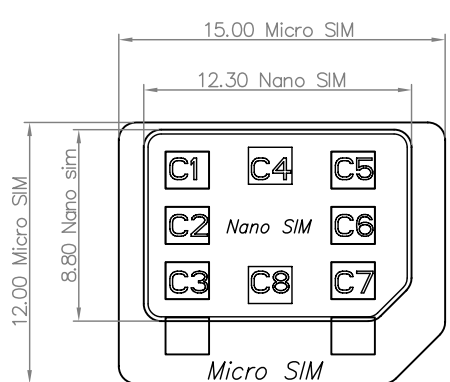


SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

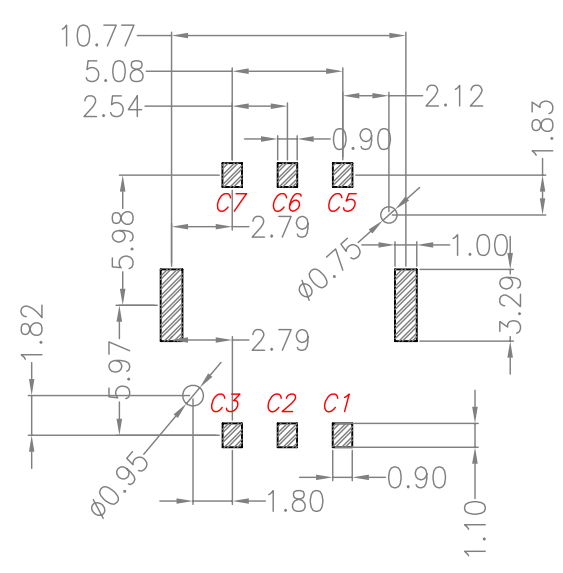


Specification


MATERIAL:
 Insulator: High Temperature Thermoplastic, UL 94V-0,
 Contact: C5210
 SHELL: SUS

PLATING:
 Contact: Plated 50u" Ni Overall Contact ALL Au 1U,
 Shell: Plated 50u" Ni Overall, PAD Au 1U

Electrical:
 Current Rating :0.5mA AC/DC max.
 Voltage Rating :125V AC/DC
 Ambient Temperature Range :-20° C+60° C
 Storage Temperature Range :-40° C+70° C
 Ambient Humidity Range :95% R.H. Max.
 Contact Resistance:100mΩmax.
 Insulation Resistance:1000Ωmin./500VDC
 Mating Cycles:10,000 Insertions
 Reflow peak temp.: 260° C ±5° C, 3"5 S
 Mating Cycles:3,000 Insertions Min



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY :	DATE :	PART NAME:
	陈一鸣	2014-02-23	NANO SIM NO PUSH 1.35H 带柱
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.
	马跃	2014-02-23	HVC75-SIM06-135
	APPROVED BY:	DATE :	DRAW NO:
		2014-02-23	HVC-SIM15101409
			SHEET NO.
			1 OF 1