



O.P. (MM)	F.P. (MM)
6.5 ±0.3	7.5 MAX

O.P. = OPERATING POINT
F.P. = FREE-POSITION

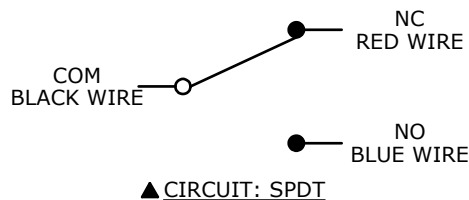

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X±0.4
X.XX±0.25
- RATING: .1A @125VAC; 2A @ 12VDC;
0.5A @ 42VDC; 1A @ 24VDC;
UL, CUL APPROVED
- ▲ 4. OPERATING FORCE: 50 +10/-30 GRAMS.
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: >100 MEGA-OHMS @ 500VDC
9. DIELECTRIC STRENGTH: 600VAC
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX (INITIAL).
11. WIRES ARE 22AWG, STRANDED, UL1007, COLOR AS NOTED
12. 2011/65/EC (ROHS) COMPLIANT.
13. ▲ DENOTES CRITICAL PARAMETER.
14. ACTUATION BELOW THE 2.6mm ACTUATION LIMIT MAY CAUSE DAMAGE TO THE INTERNAL CONTACTS.

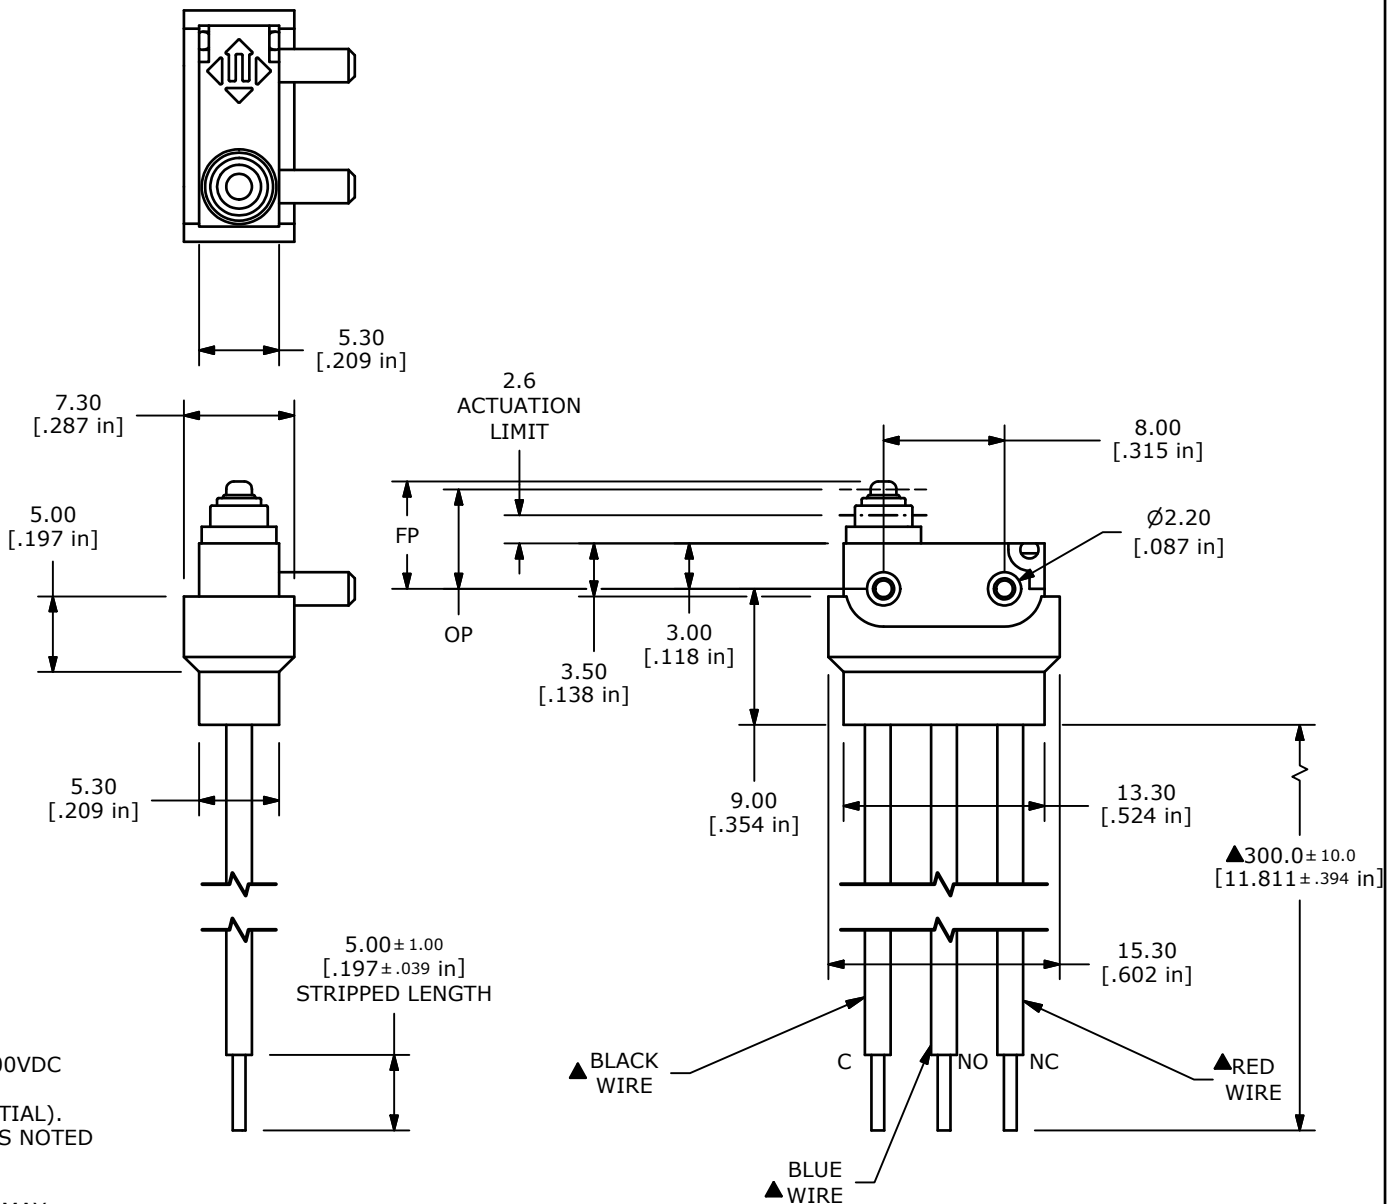

E-SWITCH®

B	22783	Updated wire cover	3/28/17	rc
A	22608	New Release	11/30/16	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE WS0850100F070WA

SCALE
2:1DATE
8/17/2016DR
rcDWG
Q930006REV
B