
This document was generated on 05/27/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0022052061

Status: Active

Description: 2.54mm (.100") Pitch KK® Wire-to-Board Header, Single Row, Right Angle, 6 Circuits, PA Polyamide Nylon, Tin (Sn) Plating

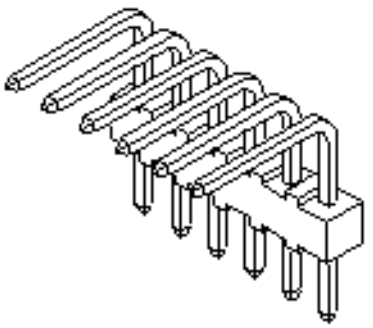

Series image - Reference only

Documents:

3D Model
Packaging Specification (PDF)
Drawing (PDF)
Product Specification PS-10-07 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	4094
Application	Board-to-Board, Wire-to-Board
MolexKits	Yes
Product Name	KK®

Physical

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural (White)
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	1
Orientation	Right Angle
PC Tail Length (in)	0.124 In
PC Tail Length (mm)	3.15 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Bag
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	200
Plating min: Mating (µm)	5
Plating min: Termination (µin)	200
Plating min: Termination (µm)	5
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	0°C to +75°C
Termination Interface: Style	Through Hole

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free Status
Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
4094Series

Mates With
2695 , 6471 , 7880 , 4455 , 7720

Electrical

Current - Maximum per Contact	4A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235

Material Info


Old Part Number	A-4094-06A102

Reference - Drawing Numbers

Packaging Specification	PK-4094-001
Product Specification	PS-10-07
Sales Drawing	SDA-4094

This document was generated on 05/27/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

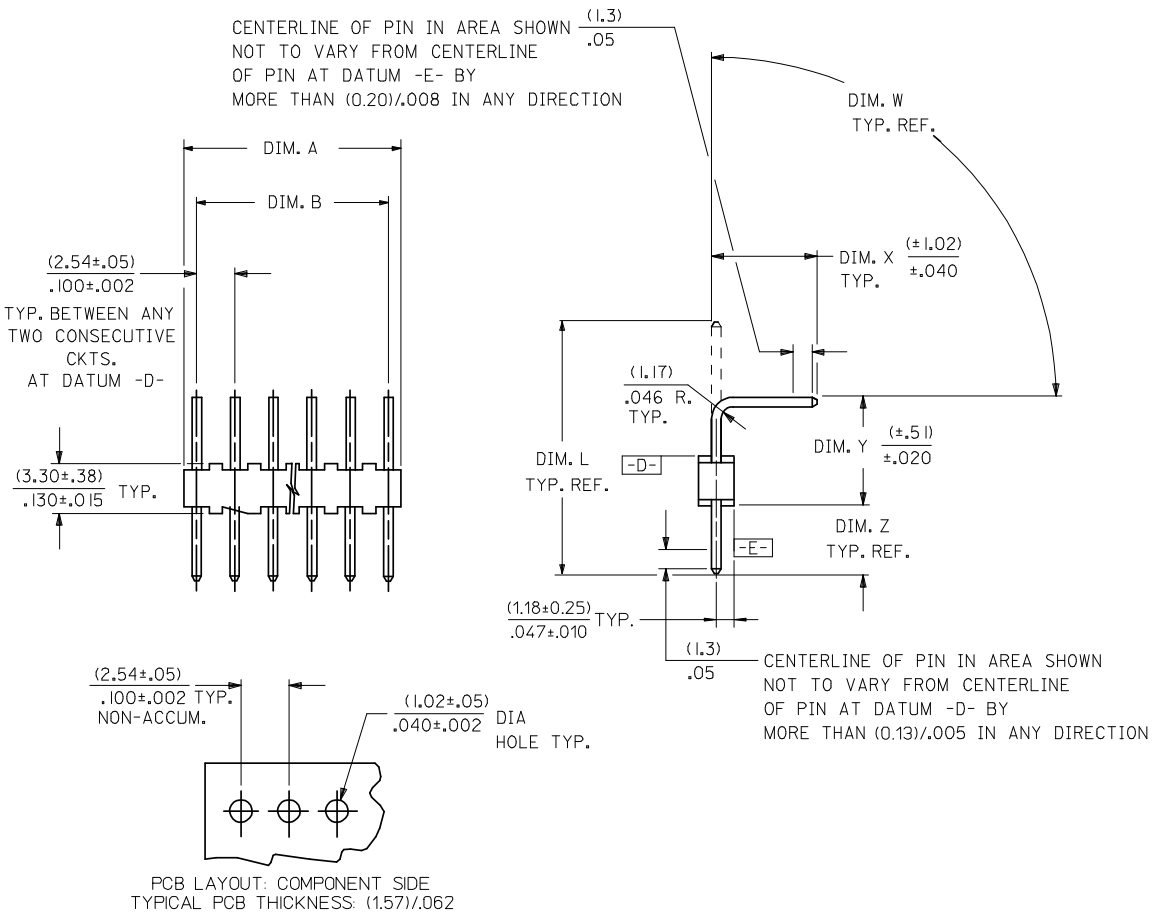

CKTS. NO. OF	DIM. B	DIM. A
2	.100 ± .002 (2.54 ± .05)	.190 ± .008 (4.83 ± .20)
3	.200 ± .005 (5.08 ± .13)	.290 ± .008 (7.37 ± .20)
4	.300 ± .005 (7.62 ± .13)	.390 ± .008 (9.91 ± .20)
5	.400 ± .005 (10.16 ± .13)	.490 ± .008 (12.45± .20)
6	.500 ± .006 (12.70 ± .15)	.590 ± .009 (14.99± .23)
7	.600 ± .006 (15.24 ± .15)	.690 ± .009 (17.53± .23)
8	.700 ± .006 (17.78 ± .15)	.790 ± .009 (20.07± .23)
9	.800 ± .007 (20.32 ± .18)	.890 ± .010 (22.61± .25)
10	.900 ± .007 (22.86 ± .18)	.990 ± .010 (25.15± .25)
11	1.000 ± .007 (25.40 ± .18)	1.090 ± .010 (27.69± .25)
12	1.100 ± .008 (27.94 ± .20)	1.190 ± .011 (30.23± .28)
13	1.200 ± .008 (30.48 ± .20)	1.290 ± .011 (32.77± .28)
14	1.300 ± .008 (33.02 ± .20)	1.390 ± .011 (35.31± .28)
15	1.400 ± .008 (35.56 ± .20)	1.490 ± .011 (37.85± .28)
16	1.500 ± .008 (38.10 ± .20)	1.590 ± .011 (40.39± .28)
17	1.600 ± .009 (40.64 ± .23)	1.690 ± .012 (42.93± .30)
18	1.700 ± .009 (43.18 ± .23)	1.790 ± .012 (45.47± .30)
19	1.800 ± .009 (45.72 ± .23)	1.890 ± .012 (48.01± .30)
20	1.900 ± .009 (48.26 ± .23)	1.990 ± .012 (50.55± .30)
21	2.000 ± .010 (50.80 ± .25)	2.090 ± .013 (53.09± .33)
22	2.100 ± .010 (53.34 ± .25)	2.190 ± .013 (55.63± .33)
23	2.200 ± .010 (55.88 ± .25)	2.290 ± .013 (58.17± .33)
24	2.300 ± .010 (58.42 ± .25)	2.390 ± .013 (60.71± .33)
25	2.400 ± .011 (60.96 ± .28)	2.490 ± .014 (63.25± .36)
26	2.500 ± .011 (63.50 ± .28)	2.590 ± .014 (65.79± .36)
27	2.600 ± .011 (66.04 ± .28)	2.690 ± .014 (68.33± .36)
28	2.700 ± .011 (68.58 ± .28)	2.790 ± .014 (70.87± .36)

NOTES:

1. MATERIAL: NYLON, UL 94V-0, COLOR: WHITE
2. FINISH:
   - (102) OVERALL TIN: 0.00508/.000200 MIN. OVER COPPER UNDERPLATE: 0.00254/.000100 MIN.
   - (103) OVERALL TIN: 0.00508/.000200 MIN. OVER COPPER UNDERPLATE: 0.00127/.000050 MIN.
   - (501) OVERALL GOLD: 0.00051/.000020 MIN. OVER NICKEL UNDERPLATE: 0.00076/.000030 MIN.
   - (503) OVERALL GOLD 0.00076/.000030 MIN. OVER NICKEL UNDERPLATE. 0.00127/.000050 MIN.
   - (508) OVERALL GOLD: 0.00076/.000030 MIN. OVER NICKEL UNDERPLATE. 0.00076/.000030 MIN.
   - (516) OVERALL GOLD: 0.00025/.000010 MIN. OVER NICKEL UNDERPLATE. 0.00076/.000030 MIN.
3. PARTS CONFORM TO PRODUCT SPECIFICATION PS-10-07.
4. PACKAGING INFORMATION: SEE LEGEND.
5. PINS MUST CONFORM TO SOLDERABILITY SPECIFICATION SMES-152.
6. PIN PUSHOUT FORCE: 2 LBS. MIN.
7. PARTS ARE STACKABLE END TO END AND SIDE TO SIDE ON (2.54)/.100 CENTERS.
8. THE PRIMARY SHIPPING CARTON WILL BE LABELED, "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC." CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.
9. PARTS CONFORM TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

A-4094-N * * *

- NO. OF CKTS.
- VERSION: LETTER CHANGES WHEN PIN NO. OR PRESS DIM. CHANGES.
- PLATING CODE: SEE NOTE 2

SECONDARY OPERATIONS	
CODE	PACKAGE
BLANK	BULK PER PK-4094-001
A	PK-40873-0020

14	AD1
13	AD1
12	AD1
11	AD1
10	AD1
9	AD1
8	AD1
7	AD1
6	AD1
5	AD1
4	AD1
3	AD1
2	AD1
1	AD3
SHEET	REV.

ADD 1.18 DIMENSION
EC NO: UCP2009-0323 2008/08/22
DRWN:GAVERILL 2008/08/26
CH'KD:MKIPPER 2008/08/27
APPR:FSMITH
DESCRIPTION
AD3
REV

QUALITY SYMBOLS
▼=0
▽=0 (C)

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: ---
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY	KSS
DATE	1984/09/10
CHECKED BY	NP
DATE	1984/09/10
APPROVED BY	KJA
DATE	1984/09/10

TITLE: WAFER ASSY FLAT MINI KK (4030 WITH BENT PINS) 4094 SERIES DRAWING

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SDA-4094
SHEET NO.: 1 OF 14
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

ENG. NO.	PIN NO.	DIM. L	DIM. X	DIM. Z	DIM. Y	DIM. W	DIM. T
A-4094-NA102	2766-3(102)	(17.45) .687	(9.30) .366	(3.15) .124	(6.30) .248	90°	
A-4094-NA501	2766-3(501)	(17.45) .687	(9.30) .366	(3.15) .124	(6.30) .248	90°	
A-4094-NAB102	2766-40(102)	(23.80) .937	(14.99) .590	(3.78) .149	(6.30) .248	90°	
A-4094-NAC102	2766-54(102)	(17.86) .703	(9.68) .381	(4.32) .170	(5.13) .202	90°	
A-4094-NAJ102	2766-8(102)	(21.39) .842	(10.19) .401	(4.09) .161	(8.41) .331	90°	
A-4094-NAL102	2766-8(102)	(21.39) .842	(12.47) .491	(3.91) .154	(6.30) .248	90°	
A-4094-NAM102	2766-3(102)	(17.45) .687	(4.93) .194	(7.29) .287	(6.53) .257	90°	
A-4094-NAP102	2766-3(102)	(17.45) .687	(8.41) .331	(3.78) .149	(6.55) .258	90°	
A-4094-NB102	2766-43(102)	(13.46) .530	(4.85) .191	(3.61) .142	(6.30) .248	90°	
A-4094-NBE102	2766-37(102)	(20.32) .800	(11.53) .454	(3.56) .140	(6.50) .256	90°	
A-4094-NBE501	2766-37(501)	(20.32) .800	(11.53) .454	(3.56) .140	(6.50) .256	90°	
A-4094-NBF102	2766-4(102)	(18.69) .736	(9.30) .366	(2.79) .110	(7.87) .310	90°	
A-4094-NBF501	2766-4(501)	(18.69) .736	(9.30) .366	(2.79) .110	(7.87) .310	90°	
A-4094-NBH102	2766-37(102)	(20.32) .800	(11.71) .461	(2.31) .091	(7.57) .298	90°	
A-4094-NBK103	4166-11(103)	(16.51) .650	(5.00) .197	(7.67) .302	(5.13) .202	90°	
A-4094-NBJ102	2766-4(102)	(18.69) .736	(9.42) .371	(3.63) .143	(6.93) .273	90°	
A-4094-NBJ501	2766-4(501)	(18.69) .736	(9.42) .371	(3.63) .143	(6.93) .273	90°	
A-4094-NBL102	2766-8(102)	(21.39) .842	(3.81) .150	(3.05) .120	(17.60) .693	25°	
A-4094-NBM102	2766-28(102)	(15.88) .625	(5.79) .228	(4.06) .160	(6.30) .248	139°	
A-4094-NBP102	2766-3(102)	((17.45) .687	(9.07) .357	(7.87) .310	(5.82) .229	105°	
A-4094-NBR501	2766-52(501)	(14.61) .575	(9.30) .366	(1.63) .064	(4.90) .193	90°	
A-4094-NBT102	2766-39(102)	(12.70) .500	(6.38) .251	(2.79) .110	(4.78) .188	90°	
A-4094-NCA102	2766-57(102)	(13.84) .545	(5.23) .206	(3.61) .142	(6.30) .248	90°	
A-4094-NCC102	2766-73(102)	(22.71) .894	(10.74) .423	(3.25) .128	(13.61) .536	60°	
A-4094-NCE102	2766-54(102)	(17.86) .703	(9.14) .360	(3.91) .154	(6.10) .240	90°	
A-4094-NCM102	2766-1(102)	(14.22) .560	(4.47) .176	(5.92) .233	(5.11) .201	90°	

ENG. NO.	PIN NO.	DIM. L	DIM. X	DIM. Z	DIM. Y	DIM. W	DIM. T
A-4094-NCM501	2766-1(501)	(14.22) .560	(4.47) .176	(5.92) .233	(5.11) .201	90°	
A-4094-NCN501	2766-53(501)	(20.85) .821	SEE SHT. 7			90°	
A-4094-NCR501	2766-73(501)	(22.71) .894	(13.92) .548	(3.48) .137	(6.60) .260	90°	
A-4094-NCS501	4166-74(501)	(31.24) 1.230	(22.23) .875	(3.71) .146	(6.60) .260	90°	
A-4094-NCV501	2766-28(501)	(15.88) .625	(7.65) .301	(3.23) .127	(6.30) .248	90°	
A-4094-NCY508	SEE SHT. 8					90°	
A-4094-NCZ501	2766-3(501)	(17.45) .687	(9.30) .366	(2.31) .091	(7.11) .280	90°	
A-4094-NJ102	2766-28(102)	(15.88) .625	(6.63) .261	(3.02) .119	(9.73) .383	55°	
A-4094-NM102	2766-3(102)	(17.45) .687	(7.44) .293	(2.84) .112	(8.46) .333	90°	
A-4094-NR102	2766-37(102)	(20.32) .800	(12.24) .482	(3.07) .121	(6.30) .248	90°	
A-4094-NRG501	2766-53(501)	(20.85) .821	(12.32) .485	(3.53) .139	(6.30) .248	90°	
A-4094-NW102	2766-37(102)	(20.32) .800	(9.30) .366	(3.61) .142	(8.71) .343	90°	
A-4094-NZ102	2766-3(102)	(17.45) .687	(5.13) .202	(7.95) .313	(5.66) .223	90°	
A-4094-NH102	2766-1(102)	(14.22) .560	(5.23) .206	(3.96) .156	(6.30) .248	90°	
A-4094-NDA102	4166-38(102)	(27.00) 1.063	(9.30) .366	(3.15) .124	(15.82) .623	90°	
A-4094-NDB102	4166-30(102)	(30.48) 1.200	(9.30) .366	(3.07) .121	(19.38) .763	90°	
A-4094-NDC102	2766-40(102)	(23.80) .937	(12.70) .500	(3.15) .124	(9.22) .363	90°	
A-4094-NA508	2766-3(508)	(17.45) .687	(9.30) .366	(3.15) .124	(6.30) .248	90°	
A-4094-NDD102	2766-60(102)	(23.24) .915	(9.53) .375	(8.64) .340	(6.35) .250	90°	
A-4094-NAR102	2766-26(102)	(14.99) .590	(4.06) .160	(8.03) .316	(4.09) .161	90°	
A-4094-NAT102	2766-4(102)	(18.69) .736	(8.26) .325	(3.28) .129	(12.75) .502	45°	
A-4094-NAT501	2766-4(501)	(18.69) .736	(8.26) .325	(3.28) .129	(12.75) .502	45°	
A-4094-NDE501	2766-73(501)	(22.71) .894	(9.98) .393	(3.00) .118	(11.00) .433	90°	
A-4094-NDF102	2766-16(102)	(22.23) .875	(6.12) .241	(11.05) .435	(6.35) .250	90°	
A-4094-NDG102	2766-39(102)	(12.70) .500	(4.60) .181	(3.10) .122	(6.30) .248	90°	
A-4094-NBK102	4166-11(102)	(16.51) .650	(5.00) .197	(7.67) .302	(5.13) .202	90°	

UPDATE TITLE BLOCK
EC NO: UCP2005-2329 2005/07/26
DRWN:ADERR 2005/07/27
CH'KD:LSCHMIDT 2005/07/27
APPR:FSMITH
DESCRIPTION
REV
AD1

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: ---
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: KSS DATE: 1984/09/10
CHECKED BY: NP DATE: 1984/09/10
APPROVED BY: KJA DATE: 1984/09/10

TITLE: WAFER ASSY FLAT MINI KK (4030 WITH BENT PINS) 4094 SERIES DRAWING

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SDA-4094
SHEET NO.: 2 OF 14

SIZE C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

A-4094-NA102			A-4094-NA501			A-4094-NAB102		A-4094-NAC102		A-4094-NAJ102		A-4094-NAL102	
PART NO.		ENG. NO.	PART NO.		ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.
22-05-2021	*	A-4094-2A102	22-12-2021	*	A-4094-2A501	22-05-2026	A-4094-2AB102		A-4094-2AC102		A-4094-2AJ102	22-05-2027	A-4094-2AL102
22-05-2031	*	A-4094-3A102	22-12-2031	*	A-4094-3A501	22-05-2036	A-4094-3AB102		A-4094-3AC102	22-05-3038	A-4094-3AJ102	22-05-2037	A-4094-3AL102
22-05-2041	*	A-4094-4A102	22-12-2041	*	A-4094-4A501	22-05-2046	A-4094-4AB102		A-4094-4AC102	22-05-3048	A-4094-4AJ102	22-05-2047	A-4094-4AL102
22-05-2051	*	A-4094-5A102	22-12-2051	*	A-4094-5A501	22-05-2056	A-4094-5AB102		A-4094-5AC102	22-05-3058	A-4094-5AJ102	22-05-2057	A-4094-5AL102
22-05-2061	*	A-4094-6A102	22-12-2061	*	A-4094-6A501	22-05-2066	A-4094-6AB102		A-4094-6AC102	22-05-3068	A-4094-6AJ102	22-05-2067	A-4094-6AL102
22-05-2071	*	A-4094-7A102	22-12-2071	*	A-4094-7A501	22-05-2076	A-4094-7AB102		A-4094-7AC102	22-05-3078	A-4094-7AJ102	22-05-2077	A-4094-7AL102
22-05-2081	*	A-4094-8A102	22-12-2081	*	A-4094-8A501	22-05-2086	A-4094-8AB102		A-4094-8AC102	22-05-3088	A-4094-8AJ102	22-05-2087	A-4094-8AL102
22-05-2091	*	A-4094-9A102	22-12-2091	*	A-4094-9A501	22-05-2096	A-4094-9AB102		A-4094-9AC102	22-05-3098	A-4094-9AJ102	22-05-2097	A-4094-9AL102
22-05-2101	*	A-4094-10A102	22-12-2101	*	A-4094-10A501	22-05-2106	A-4094-10AB102		A-4094-10AC102	22-05-3108	A-4094-10AJ102	22-05-2107	A-4094-10AL102
22-05-2111	*	A-4094-11A102	22-12-2111	*	A-4094-11A501	22-05-2116	A-4094-11AB102		A-4094-11AC102	22-05-3118	A-4094-11AJ102	22-05-2117	A-4094-11AL102
22-05-2121	*	A-4094-12A102	22-12-2121	*	A-4094-12A501	22-05-2126	A-4094-12AB102		A-4094-12AC102	22-05-3128	A-4094-12AJ102	22-05-2127	A-4094-12AL102
22-05-2131	*	A-4094-13A102	22-12-2131	*	A-4094-13A501	22-05-2136	A-4094-13AB102		A-4094-13AC102	22-05-3138	A-4094-13AJ102	22-05-2137	A-4094-13AL102
22-05-2141	*	A-4094-14A102	22-12-2141	*	A-4094-14A501	22-05-2146	A-4094-14AB102		A-4094-14AC102	22-05-3148	A-4094-14AJ102	22-05-2147	A-4094-14AL102
22-05-2151	*	A-4094-15A102	22-12-2151	*	A-4094-15A501	22-05-2156	A-4094-15AB102		A-4094-15AC102	22-05-3158	A-4094-15AJ102	22-05-2157	A-4094-15AL102
22-05-2161	*	A-4094-16A102	22-12-2161	*	A-4094-16A501	22-05-2166	A-4094-16AB102		A-4094-16AC102	22-05-3168	A-4094-16AJ102	22-05-2167	A-4094-16AL102
22-05-2171	*	A-4094-17A102	22-12-2171	*	A-4094-17A501	22-05-2176	A-4094-17AB102		A-4094-17AC102	22-05-3178	A-4094-17AJ102	22-05-2177	A-4094-17AL102
22-05-2181	*	A-4094-18A102	22-12-2181	*	A-4094-18A501	22-05-2186	A-4094-18AB102		A-4094-18AC102	22-05-3188	A-4094-18AJ102	22-05-2187	A-4094-18AL102
22-05-2191	*	A-4094-19A102	22-12-2191	*	A-4094-19A501	22-05-2196	A-4094-19AB102		A-4094-19AC102	22-05-3198	A-4094-19AJ102	22-05-2197	A-4094-19AL102
22-05-2201	*	A-4094-20A102	22-12-2201	*	A-4094-20A501	22-05-2206	A-4094-20AB102		A-4094-20AC102	22-05-3208	A-4094-20AJ102	22-05-2207	A-4094-20AL102
22-05-2211	*	A-4094-21A102	22-12-2211	*	A-4094-21A501	22-05-2216	A-4094-21AB102		A-4094-21AC102	22-05-3218	A-4094-21AJ102	22-05-2217	A-4094-21AL102
22-05-2221	*	A-4094-22A102	22-12-2221	*	A-4094-22A501	22-05-2226	A-4094-22AB102		A-4094-22AC102	22-05-3228	A-4094-22AJ102	22-05-2227	A-4094-22AL102
22-05-2231	*	A-4094-23A102	22-12-2231	*	A-4094-23A501	22-05-2236	A-4094-23AB102		A-4094-23AC102	22-05-3238	A-4094-23AJ102	22-05-2237	A-4094-23AL102
22-05-2241	*	A-4094-24A102	22-12-2241	*	A-4094-24A501	22-05-2246	A-4094-24AB102		A-4094-24AC102	22-05-3248	A-4094-24AJ102	22-05-2247	A-4094-24AL102
22-05-2251	*	A-4094-25A102	22-12-2251	*	A-4094-25A501	22-05-2256	A-4094-25AB102		A-4094-25AC102	22-05-3258	A-4094-25AJ102	22-05-2257	A-4094-25AL102
22-05-2261		A-4094-26A102	22-12-2261		A-4094-26A501	22-05-2266	A-4094-26AB102		A-4094-26AC102	22-05-3268	A-4094-26AJ102	22-05-2267	A-4094-26AL102
22-05-2271		A-4094-27A102	22-12-2271		A-4094-27A501	22-05-2276	A-4094-27AB102		A-4094-27AC102	22-05-3278	A-4094-27AJ102	22-05-2277	A-4094-27AL102
22-05-2281		A-4094-28A102	22-12-2281		A-4094-28A501	22-05-2286	A-4094-28AB102		A-4094-28AC102	22-05-3288	A-4094-28AJ102	22-05-2287	A-4094-28AL102

UPDATE TITLE BLOCK
EC NO: UCP2005-2329 2005/07/26
DRWN:ADERR 2005/07/27
CHKD:LSCHMIDT 2005/07/27
APPR:FSMITH
DESCRIPTION
REV

AD1

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: ---
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	KSS	1984/09/10
CHECKED BY	NP	1984/09/10
APPROVED BY	KJA	1984/09/10

TITLE: WAFER ASSY FLAT MINI KK (4030 WITH BENT PINS) 4094 SERIES DRAWING

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SDA-4094
SHEET NO.: 4 OF 14

SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION