MMF300N060DA6B
MMF300N060DK6B

600V 300A FRED Module

July 2009 **PRELIMINARY** **RoHS Compliant**


PRODUCT FEATURES

- Ultrafast Reverse Recovery Time
- Soft Reverse Recovery Characteristics
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package



APPLICATIONS

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- Power Factor Correction (PFC) Circuit



ABSOLUTE MAXIMUM RATINGS

T_C=25°C unless otherwise specified

Symbol	Parameter	Test Conditions	Values	Unit
V_R	Maximum D.C. Reverse Voltage		600	V
V_{RRM}	Maximum Repetitive Reverse Voltage		600	V
$I_{F(AV)}$	Average Forward Current	T_C=100°C, Per Diode	150	A
		T_C=100°C, Per Moudle	300	A
		T_C=110°C, 20KHz, Per Moudle	200	A
$I_{F(RMS)}$	RMS Forward Current	T_C=100°C, Per Diode	220	A
I_{FSM}	Non-Repetitive Surge Forward Current	T_J=45°C, t=10ms, 50Hz, Sine	1400	A
		T_J=45°C, t=8.3ms, 60Hz, Sine	1500	A
I^2t	I^2t (For Fusing)	T_J=45°C, t=10ms, 50Hz, Sine	9800	A^2s
		T_J=45°C, t=8.3ms, 60Hz, Sine	11200	A^2s
P_D	Power Dissipation		370	W
T_J	Junction Temperature		-40 to +150	°C
T_{STG}	Storage Temperature Range		-40 to +125	°C
V_{isol}	Insulation Test Voltage	AC, t=1min	3000	V
Torque	Module-to-Sink	Recommended（M5）	2.5～4	N·m
Torque	Module Electrodes	Recommended（M5）	2.5～4	N·m
$R_{\theta JC}$	Thermal Resistance	Junction-to-Case	0.34	°C /W
Weight			100	g

MacMic Science & Technology Co., Ltd.

Add：#18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R .of China

Tel.：+86-519-85163708 Fax：+86-519-85162291 Post Code：213022 Website：www.macmicst.com

Download from alldatasheet.com

ELECTRICAL CHARACTERISTICS

T_C=25°C unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	Reverse Leakage Current	V_R=600V	--	--	1	mA
		V_R=600V, T_J=125°C	--	--	5	mA
V_F	Forward Voltage	I_F=150A	--	1.15	1.40	V
		I_F=150A, T_J=125°C	--	--	1.25	V
t_{rr}	Reverse Recovery Time	I_F=1A, V_R=30V, di_F/dt=-200A/μs	--	50	--	ns
t_{rr}	Reverse Recovery Time	V_R=300V, I_F=150A	--	130	--	ns
I_{RRM}	Max. Reverse Recovery Current	di_F/dt=-200A/μs, T_J=25°C	--	14	--	A
t_{rr}	Reverse Recovery Time	V_R=300V, I_F=150A	--	220	--	ns
I_{RRM}	Max. Reverse Recovery Current	di_F/dt=-200A/μs, T_J=125°C	--	22	--	A

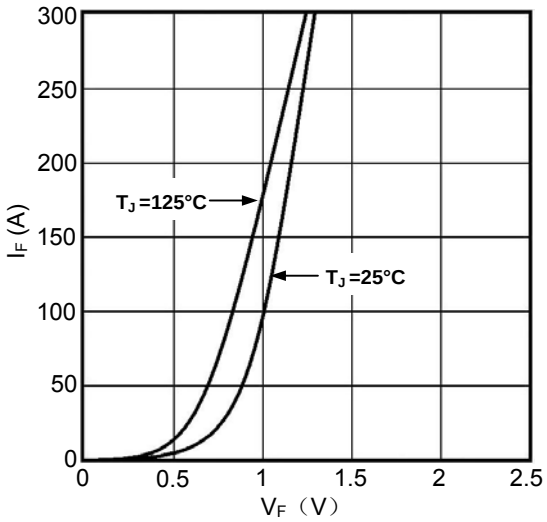


Figure1. Forward Voltage Drop vs Forward Current

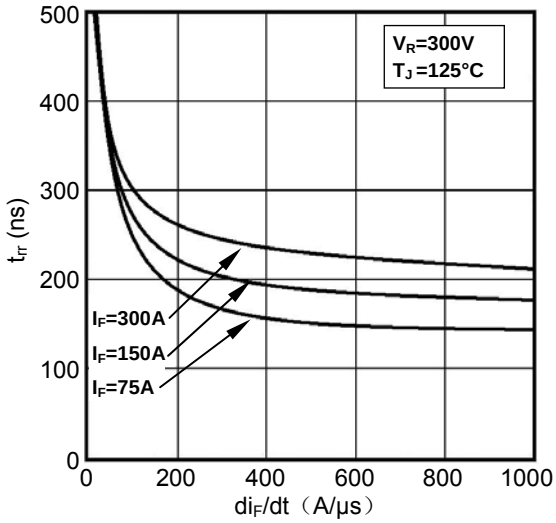


Figure2. Reverse Recovery Time vs di_F/dt

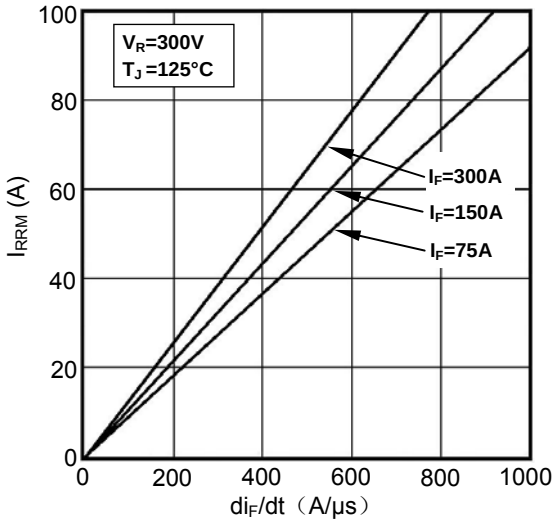


Figure3. Reverse Recovery Current vs di_F/dt

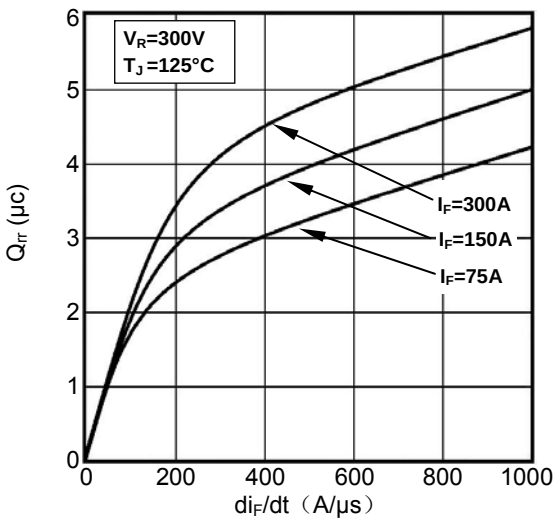


Figure4. Reverse Recovery Charge vs di_F/dt

Download from alldatasheet.com

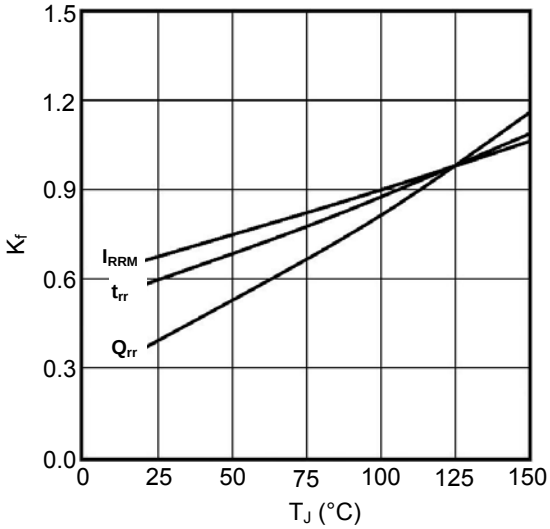


Figure5. Dynamic Parameters vs Junction Temperature


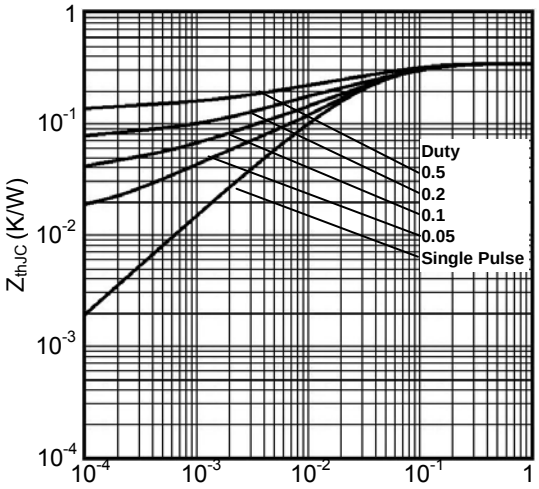


Figure6. Transient Thermal Impedance

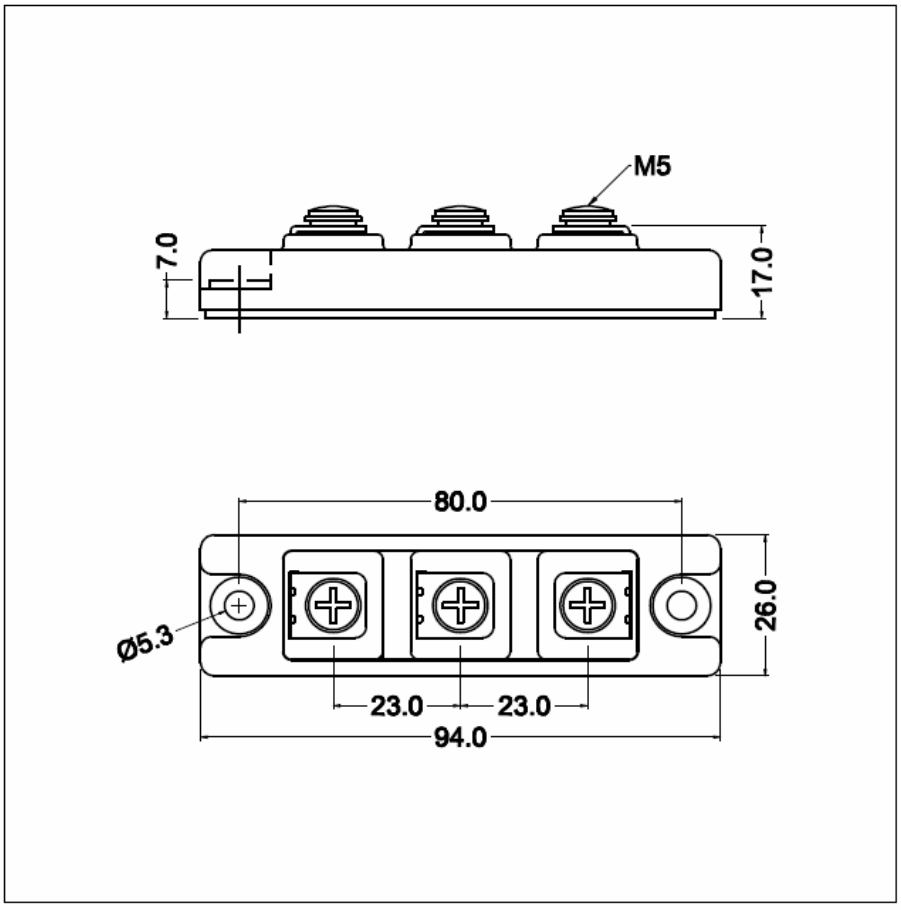

Dimensions (mm)

Figure7. Package Outline

Download from alldatasheet.com