


# WP12

## 12 Watt Single Output Regulated Power Supplies

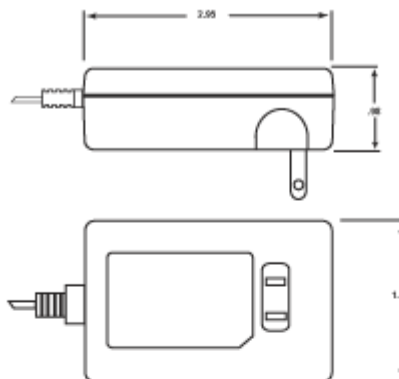

**Features:**

- N.A. AC input
- Fully enclosed plastic case
- Fully regulated output
- High Efficiency
- Warranty: 5 years

**Environmental**


- Operating temperature....0° C to 40° C
- Storage temperature.....-55° C to 85° C
- Weight: 0.5 lbs

**EMI**

Meets FCC class B

**Safety**

UL 1950  
cUL Listed to CSA 22.2 No. 950

Polarity: COM  +V

**Electrical specifications**

**Input**

- Voltage.....90-132VAC
- Current.....0.75A
- Frequency.....47-63 Hz
- Input connector.....2 Pin NEMA 5/15 plug

**Output**

- Line regulation.....TYP 1%
- Load regulation.....5% Max
- Set point..... 5% of rated output
- Hold up time.....12 ms min. at full load 115 V

- Over voltage protection.....Built-in
- Over current protection.....Built-in
- Short circuit protection.....Pulsing Mode, auto recovery
- Ripple/noise(Vp-p).....1%
- Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

**Output Electrical Specifications**

Model No.	Voltage	Power	Current
WP1205-760	5	12	2.4A
WP1212-760	12	12	1A
WP1215-760	15	12	0.8A
WP1218-760	18	12	0.67A
WP1224-760	24	12	0.5A

[Quality Power Supplies](#) | 
 [Agency Certifications](#) | 
 [Output Connectors](#) | 
 [Custom Requests](#) | 
 [About Us](#) | 
 [Quality Management Team](#) | 
 [Job Opportunities](#) | 
 [Elpac News](#) | 
 [Sales Representatives](#) | 
 [Distributors](#) | 
 [Catalog Request](#) | 
 [Power Supplies](#) | 
 [External Power Supplies](#) | 
 [Open Frame Power Supplies](#) | 
 [Medical Power Supplies](#) | 
 [Customer Support](#)