
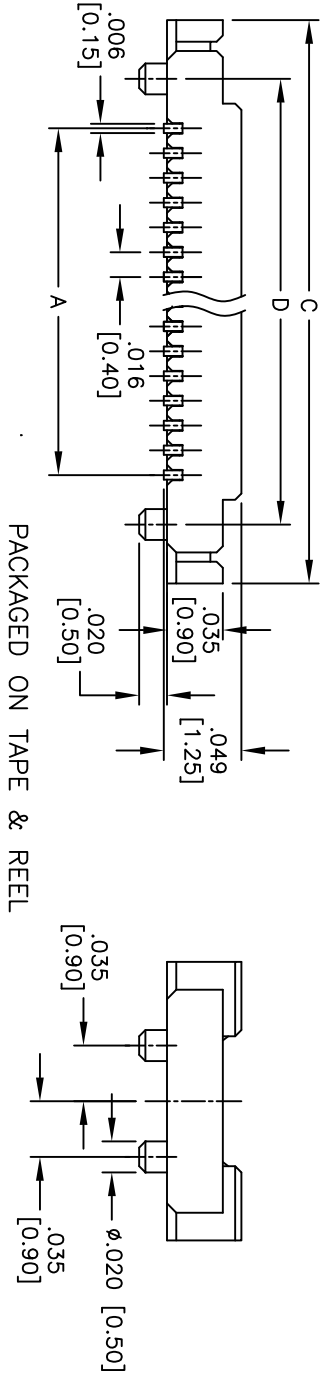


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/02/10	

APPROVED: _____
 DATE: _____ TITLE: _____

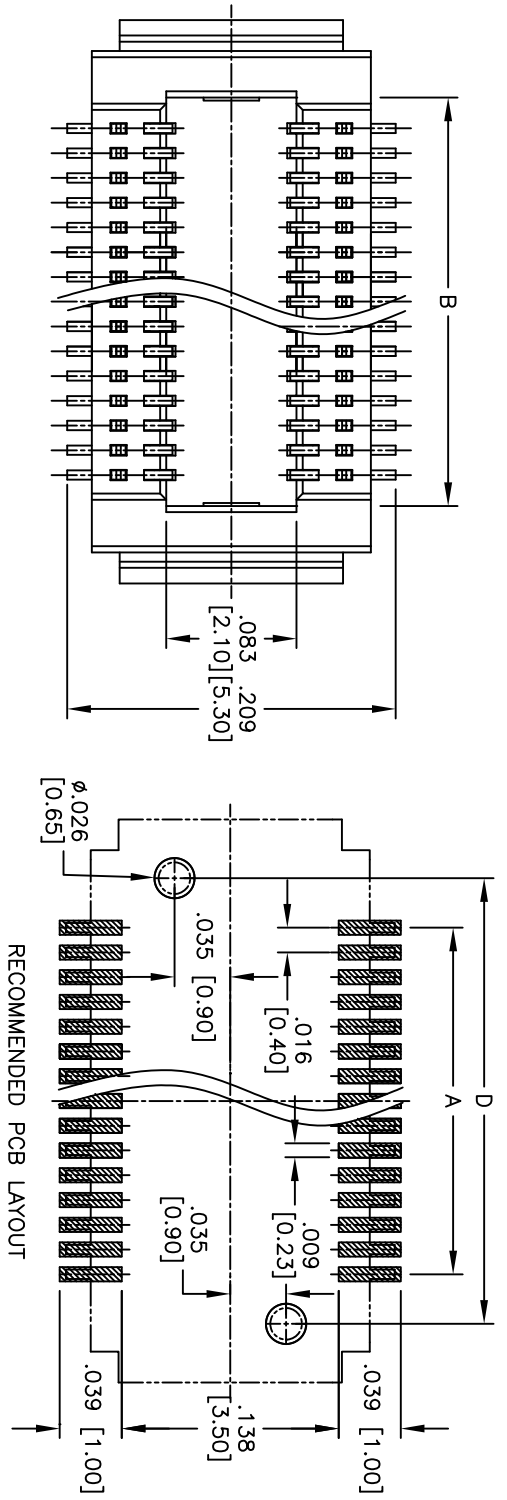

PACKAGED ON TAPE & REEL

Positions: 20, 30, 40

A = .016 [0.40] x (No. of Contacts per row - 1) + .039 [1.00]
 B = .016 [0.40] x (No. of Contacts per row - 1) + .138 [3.50]
 C = .016 [0.40] x (No. of Contacts per row - 1) + .063 [1.60]
 D = .016 [0.40] x (No. of Contacts per row - 1) + .063 [1.60]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .016 [0.40] BOARD TO BOARD SOCKET, SMT TYPE
 1.25 MM HEIGHT, STACKING HEIGHT=1.5MM

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Copper Alloy
 Hold down: Copper Alloy
 Plating: Gold flash over Nickel underplate overall.
Electrical:
 Operating voltage: 30 VAC max
 Current rating: 0.3 Amps max
 Contact resistance: 60 mohms max. initial
 Insulation resistance: 50 Mohms min
Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	12/02/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	BB4-SE-XX-G-1.25-T/R	-
REF: S00728T	SCALE: NTS	SHEET 1 OF 1