


# Interface cable UC-30GM-R2



## Function

The UC-30GM-R2 interface cable enables the parameterisation of ultrasonic sensors of types UC...-30GM-..R2-V15 using the ULTRA3000 service software. The cable creates a connection between the PC-internal RS 232 interface and the connector of the temperature/programming plug on the sensor.  
At PCs without RS 232 interface the connection can alternatively be done at a free USB port. For this purpose, additionally an interface adapter USB-0,8M-PVC ABG-SUBD9 is required.

## Dimensions

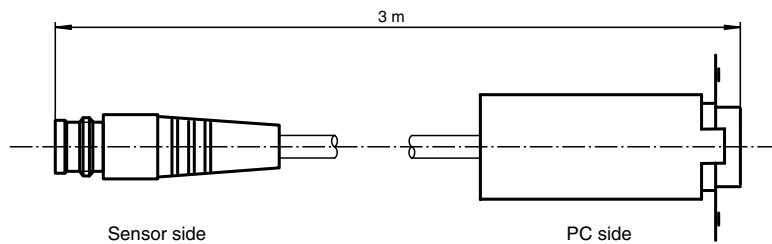

## Technical Data




### Mechanical specifications

Connection	9-pin Sub-D socket
Material	
Cable	PUR
Cable	
Color	black
Cable length	3 m

## Accessories

<b>ULTRA3000</b>	Software for ultrasonic sensors, comfort line
------------------	---

**Accessories**

	<b>UVW90-M30</b>	Ultrasonic -deflector
	<b>UVW90-K30</b>	Ultrasonic -deflector
	<b>M30K-VE</b>	Plastic nuts with centering ring for the vibration-free mounting of cylindrical sensors