



PANEL THICKNESS	X dimension
0.75-1.25 [0.30-.049]	19.2-0.1 [7.56]
1.25-2.0 [0.49-.079]	19.4-0.1 [7.64]
2.0-3.0 [0.79-1.18]	19.8-0.1 [7.80]



PANEL CUTOOUT
NOT TO SCALE



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25

- ### 3. RATING:

6A @250VAC;9A @125VAC (UL, CSA, VDE)

- #### 4. MATERIAL:




CONTACT SURFACE: Coin Silver, Silver Plate

TERMINAL: Copper Alloy W/ Silver Plate.

5. CONTACT RESISTANCE: 20MILLIOHMS TYP. INITIAL
6. INSULATION RESISTANCE: 1000Megohms
7. DIELECTRIC STRENGTH:

- >1500V RMS min. @SEA LEVEL

- >3000V RMS @SEA LEVEL

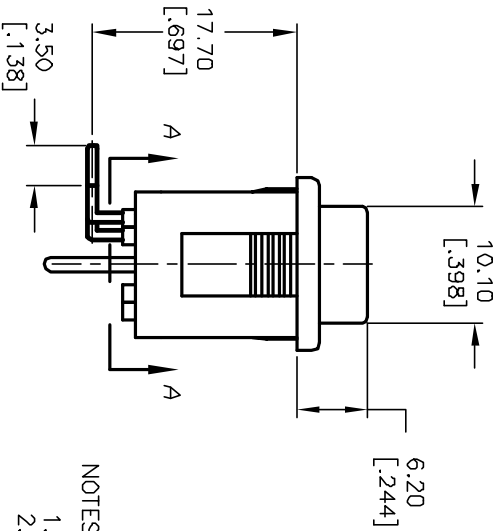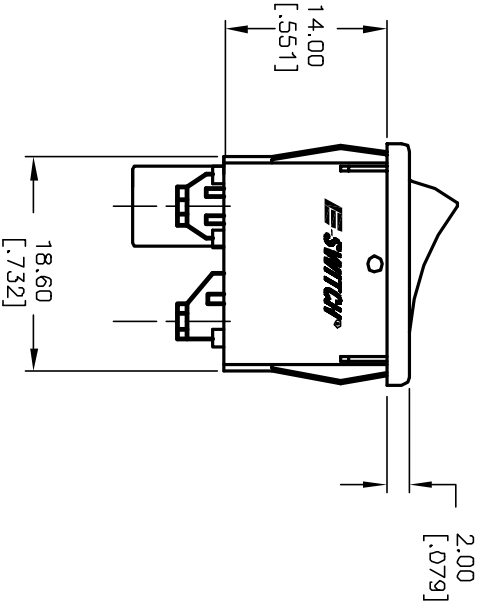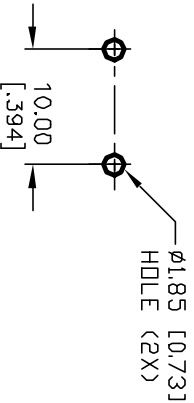

RECOMMENDED P.C.B. HOLES

				TITLE
A	I1330	RELEASE FOR PRODUCTION	10/3/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
SCALE		R1973A BLK BLK GRD		
1.5:1		DATE	DR	DWG
		10/3/02	CB	M400103
				REV
				A