

## Low Harmonic Distortion, 24-Channel SPST High-Voltage Analog Switch

### Features

- 24-Channel of High-Voltage Analog Switch
- 3.3V or 5.0V CMOS Input Logic Level
- 24-Channel SPST Configuration
- 20 MHz Data Shift Clock Frequency
- HVCMOS Technology for High Performance
- Very Low Quiescent Power Dissipation ( $\sim 10 \mu\text{A}$ )
- Low Parasitic Capacitance
- DC to 50 MHz Analog Signal Frequency
- -60 dB Typical OFF-Isolation at 5.0 MHz
- CMOS Logic Circuitry for Low Power
- Excellent Noise Immunity
- Cascadable Serial Data Register with Latches
- Flexible Operating Supply Voltages
- Integrated Bleed Resistors on Outputs (HV2762 Only)

### Applications

- Medical Ultrasound Imaging
- Piezoelectric Transducer Drivers
- Inkjet Printer Heads
- Optical MEMS Modules


### General Description

HV2662/HV2762 are low-charge injection, low harmonic distortion, 24-channel, high-voltage analog switch integrated circuits (ICs). These ICs excel in applications requiring high-voltage switching controlled by low-voltage control signals, such as medical ultrasound imaging, piezoelectric transducer driver, and printers. HV2762 provides integrated bleed resistors that eliminate voltage build-up on capacitive loads such as piezoelectric transducers. HV2662 does not have integrated bleed resistors.

HV2662/HV2762 shift input data into a 24-bit shift register that can then be retained in a 24-bit latch. To reduce any possible clock feed through noise, the latch-enable bar should be left high until all bits are clocked in during the rising edge of the clock. Using High-Voltage CMOS technology, these ICs combine high-voltage, bilateral DMOS switches and low-power CMOS logic to provide efficient control of high voltage analog signals.

The device is suitable for various combinations of high voltage supplies, e.g.,  $V_{PP}/V_{NN}$ : +40V/-160V, +100V/-100V, and +160V/-40V.

### Package Types

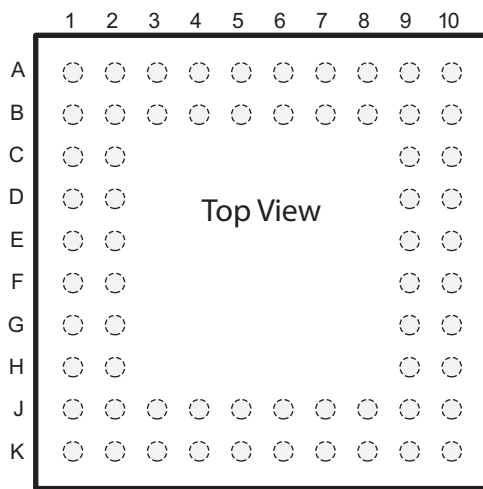


64-ball VFBGA

See [Table 2-1](#) for pin information.

# HV2662/HV2762

## Functional Block Diagram

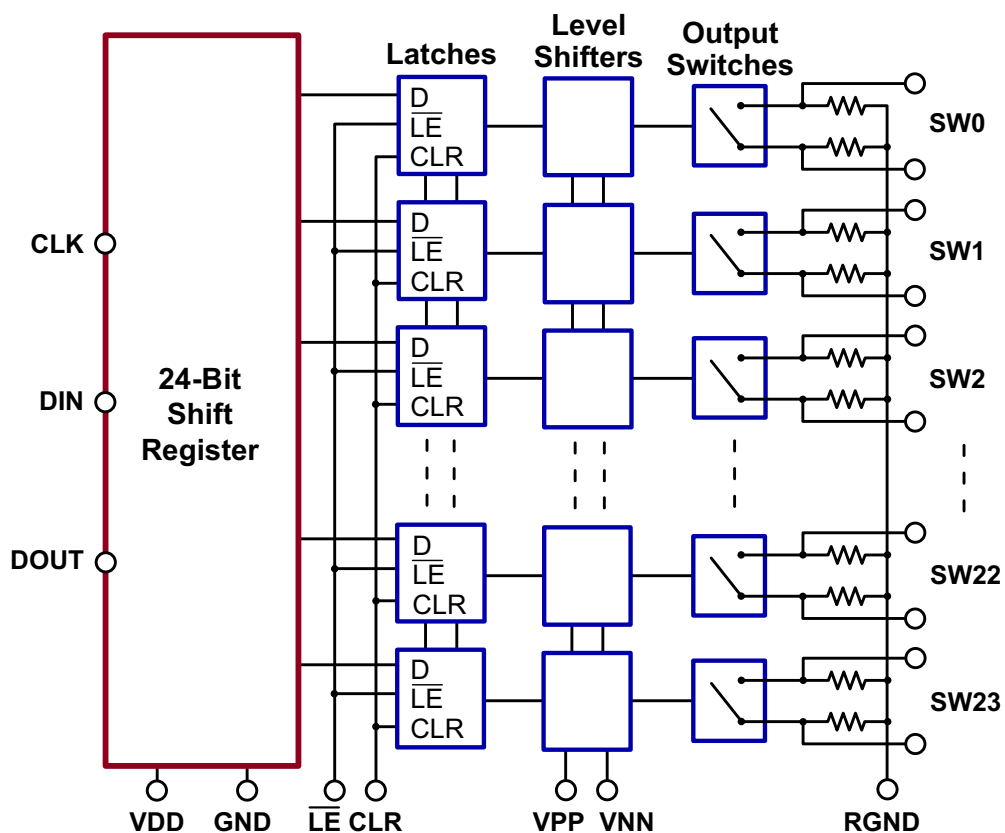

**Note:** Bleed resistors and RGND only apply to HV2762.

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings<sup>†</sup>

|                                                             |                                    |
|-------------------------------------------------------------|------------------------------------|
| V <sub>DD</sub> Logic Supply .....                          | -0.50 to +6.5V                     |
| V <sub>PP</sub> - V <sub>NN</sub> Differential Supply ..... | 220V                               |
| V <sub>PP</sub> Positive Supply .....                       | -0.5 to V <sub>NN</sub> + 200V     |
| V <sub>NN</sub> Negative Supply .....                       | +0.5 to -200V                      |
| Logic Input Voltage .....                                   | -0.5V to V <sub>DD</sub> +0.3V     |
| Analog Signal Range .....                                   | V <sub>NN</sub> to V <sub>PP</sub> |
| Peak Analog Signal Current/Channel .....                    | 2.0A                               |
| Storage Temperature .....                                   | -65°C to +150°C                    |
| Power Dissipation .....                                     | 1.0W                               |

**† Notice:** Stresses above those listed under “Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

### RECOMMENDED OPERATING CONDITIONS <sup>(1,2,3)</sup>

| Symbol           | Parameter                          | Value                                                       |
|------------------|------------------------------------|-------------------------------------------------------------|
| V <sub>DD</sub>  | Logic Power Supply Voltage         | 3.0V to 5.5V <sup>(2)</sup>                                 |
| V <sub>PP</sub>  | Positive High-Voltage Supply       | +40V to V <sub>NN</sub> +200V <sup>(2)</sup>                |
| V <sub>NN</sub>  | Negative High-Voltage Supply       | -40V to -160V <sup>(2)</sup>                                |
| V <sub>IH</sub>  | High-Level Input Voltage           | 0.9V <sub>DD</sub> to V <sub>DD</sub>                       |
| V <sub>IL</sub>  | Low-Level Input Voltage            | 0V to 0.1 V <sub>DD</sub>                                   |
| V <sub>SIG</sub> | Analog Signal Voltage Peak-to-Peak | V <sub>NN</sub> +10V to V <sub>PP</sub> -10V <sup>(3)</sup> |
| T <sub>A</sub>   | Operating Free Air Temperature     | 0°C to +70°C                                                |

**Note 1:** Power-up/down sequence is arbitrary except GND must be powered-up first and powered-down last.

**2:** Rise and fall times of power supplies V<sub>DD</sub>, V<sub>PP</sub>, and V<sub>NN</sub> should not be less than 1.0 msec.

**3:** V<sub>SIG</sub> must be V<sub>NN</sub> ≤ V<sub>SIG</sub> ≤ V<sub>PP</sub> or floating during power-up/down transition.

### DC ELECTRICAL CHARACTERISTICS

**Electrical Specifications:** Over recommended operating conditions unless otherwise specified.  
See test circuits in [Figure 3-2](#).

| Parameter                                  | Symbol            | 0°C  |      | +25°C |      |      | +70°C |      | Units | Conditions                                                                  |
|--------------------------------------------|-------------------|------|------|-------|------|------|-------|------|-------|-----------------------------------------------------------------------------|
|                                            |                   | Min. | Max. | Min.  | Typ. | Max. | Min.  | Max. |       |                                                                             |
| Small Signal Switch ON-Resistance          | R <sub>ONS</sub>  | —    | —    | —     | 26   | —    | —     | —    | Ω     | I <sub>SIG</sub> = 5.0 mA, V <sub>PP</sub> = +40V, V <sub>NN</sub> = -160V  |
|                                            |                   | —    | —    | —     | 22   | —    | —     | —    |       | I <sub>SIG</sub> = 200 mA, V <sub>NN</sub> = -160V                          |
|                                            |                   | —    | —    | —     | 22   | —    | —     | —    |       | I <sub>SIG</sub> = 5.0 mA, V <sub>PP</sub> = +100V, V <sub>NN</sub> = -100V |
|                                            |                   | —    | —    | —     | 18   | —    | —     | —    |       | I <sub>SIG</sub> = 200 mA, V <sub>NN</sub> = -100V                          |
|                                            |                   | —    | —    | —     | 20   | —    | —     | —    |       | I <sub>SIG</sub> = 5.0 mA, V <sub>PP</sub> = +160V, V <sub>NN</sub> = -40V  |
|                                            |                   | —    | —    | —     | 16   | —    | —     | —    |       | I <sub>SIG</sub> = 200 mA, V <sub>NN</sub> = -40V                           |
| Small Signal Switch ON-Resistance Matching | ΔR <sub>ONS</sub> | —    | 20   | —     | 5.0  | 20   | —     | 20   | %     | I <sub>SIG</sub> = 5.0 mA, V <sub>PP</sub> = +100V, V <sub>NN</sub> = -100V |
| Large Signal Switch ON-Resistance          | R <sub>ONL</sub>  | —    | —    | —     | 30   | —    | —     | —    | Ω     | V <sub>SIG</sub> = V <sub>PP</sub> -10V, I <sub>SIG</sub> = 1A<br>(Note 1)  |

**Note 1:** Specification is obtained by characterization and is not 100% tested.

**2:** Design guidance only.

# HV2662/HV2762

## DC ELECTRICAL CHARACTERISTICS (CONTINUED)

**Electrical Specifications:** Over recommended operating conditions unless otherwise specified.  
See test circuits in [Figure 3-2](#).

| Parameter                                    | Symbol     | 0°C  |      | +25°C |      |      | +70°C |      | Units      | Conditions                                                                                                                                                                                     |
|----------------------------------------------|------------|------|------|-------|------|------|-------|------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                              |            | Min. | Max. | Min.  | Typ. | Max. | Min.  | Max. |            |                                                                                                                                                                                                |
| Output-Switch Shunt Resistance (HV2762 Only) | $R_{INT}$  | —    | —    | 20    | 35   | 50   | —     | —    | K $\Omega$ | Output Switch to $R_{GND}$ ,<br>$I_{RINT} = 0.5$ mA                                                                                                                                            |
| Switch OFF-Leakage per Switch                | $I_{SOL}$  | —    | 5.0  | —     | 1.0  | 10   | —     | 15   | $\mu$ A    | $V_{SIG} = V_{PP} - 10V$ , $V_{NN} + 10V$                                                                                                                                                      |
| DC Offset Switch OFF                         | $V_{OS}$   | —    | 300  | —     | 100  | 300  | —     | 300  | mV         | No load for HV2762.<br>$R_{LOAD} = 100$ K $\Omega$ for HV2662                                                                                                                                  |
| DC Offset Switch ON                          |            | —    | 500  | —     | 100  | 500  | —     | 500  |            |                                                                                                                                                                                                |
| Quiescent $V_{PP}$ Supply Current            | $I_{PPQ}$  | —    | —    | —     | 10   | 50   | —     | —    | $\mu$ A    | All switches OFF                                                                                                                                                                               |
| Quiescent $V_{NN}$ Supply Current            | $I_{NNQ}$  | —    | —    | —     | -10  | -50  | —     | —    |            |                                                                                                                                                                                                |
| Quiescent $V_{PP}$ Supply Current            | $I_{PPQ}$  | —    | —    | —     | 10   | 50   | —     | —    | $\mu$ A    | All switches ON,<br>$I_{SW} = 5.0$ mA                                                                                                                                                          |
| Quiescent $V_{NN}$ Supply Current            | $I_{NNQ}$  | —    | —    | —     | -10  | -50  | —     | —    |            |                                                                                                                                                                                                |
| Switch Output Peak Current                   | $I_{SW}$   | —    | —    | —     | 2.0  | 1.3  | —     | —    | A          | $V_{SIG}$ duty cycle < 0.1%<br>( <a href="#">Note 1</a> )                                                                                                                                      |
| Output Switching Frequency                   | $f_{SW}$   | —    | —    | —     | —    | 50   | —     | —    | kHz        | Duty cycle = 50%<br>( <a href="#">Note 1</a> )                                                                                                                                                 |
| Average $V_{PP}$ Supply Current              | $I_{PP}$   | —    | 4.0  | —     | —    | 4.5  | —     | 5.0  | mA         | $V_{PP} = +40V$ ,<br>$V_{NN} = -160V$<br>$V_{PP} = +100V$ ,<br>$V_{NN} = -100V$<br>$V_{PP} = +160V$ ,<br>$V_{NN} = -40V$<br>All output switches are turning ON and OFF at 50 kHz with no load. |
|                                              |            | —    | 4.0  | —     | —    | 4.5  | —     | 5.0  |            |                                                                                                                                                                                                |
|                                              |            | —    | 4.0  | —     | —    | 4.5  | —     | 5.0  |            |                                                                                                                                                                                                |
| Average $V_{NN}$ Supply Current              | $I_{NN}$   | —    | 4.0  | —     | —    | 4.5  | —     | 5.0  | mA         | $V_{PP} = +40V$ ,<br>$V_{NN} = -160V$<br>$V_{PP} = +100V$ ,<br>$V_{NN} = -100V$<br>$V_{PP} = +160V$ ,<br>$V_{NN} = -40V$<br>All output switches are turning ON and OFF at 50 kHz with no load. |
|                                              |            | —    | 4.0  | —     | —    | 4.5  | —     | 5.0  |            |                                                                                                                                                                                                |
|                                              |            | —    | 4.0  | —     | —    | 4.5  | —     | 5.0  |            |                                                                                                                                                                                                |
| Average $V_{DD}$ Supply Current              | $I_{DD}$   | —    | 8.0  | —     | —    | 8.0  | —     | 8.0  | mA         | $f_{CLK} = 5.0$ MHz, $V_{DD} = 5.0V$                                                                                                                                                           |
| Quiescent $V_{DD}$ Supply Current            | $I_{DDQ}$  | —    | 10   | —     | —    | 10   | —     | 10   | $\mu$ A    | All logic inputs are static                                                                                                                                                                    |
| Data Out Source Current                      | $I_{SOR}$  | 0.45 | —    | 0.45  | 0.70 | —    | 0.40  | —    | mA         | $V_{OUT} = V_{DD} - 0.7V$                                                                                                                                                                      |
| Data Out Sink Current                        | $I_{SINK}$ | 0.45 | —    | 0.45  | 0.70 | —    | 0.40  | —    | mA         | $V_{OUT} = 0.7V$                                                                                                                                                                               |
| Logic Input Capacitance                      | $C_{IN}$   | —    | 10   | —     | —    | 10   | —     | 10   | pF         | ( <a href="#">Note 2</a> )                                                                                                                                                                     |

**Note 1:** Specification is obtained by characterization and is not 100% tested.

**2:** Design guidance only.

## AC ELECTRICAL CHARACTERISTICS

**Electrical Specifications:** Over recommended operating conditions unless otherwise specified.  
See test circuits in [Figure 3-2](#).

| Parameter                                      | Symbol        | 0°C  |      | 25°C |      |      | 70°C |      | Units   | Conditions                                                                                  |
|------------------------------------------------|---------------|------|------|------|------|------|------|------|---------|---------------------------------------------------------------------------------------------|
|                                                |               | Min. | Max. | Min. | Typ. | Max. | Min. | Max. |         |                                                                                             |
| Setup Time Before $\overline{\text{LE}}$ Rises | $t_{SD}$      | 25   | —    | 25   | —    | —    | 25   | —    | ns      | ( <a href="#">Note 1</a> )                                                                  |
| Time Width of $\overline{\text{LE}}$           | $t_{WLE}$     | 56   | —    | 56   | —    | —    | 56   | —    | ns      | $V_{DD} = 3.0V$ ( <a href="#">Note 1</a> )                                                  |
|                                                |               | 12   | —    | 12   | —    | —    | 12   | —    |         | $V_{DD} = 5.0V$ ( <a href="#">Note 1</a> )                                                  |
| Clock Delay Time to Data Out                   | $t_{DO}$      | 9.0  | 40   | 9.0  | —    | 40   | 9.0  | 40   | ns      | $V_{DD} = 3.0V$ ( <a href="#">Note 1</a> )                                                  |
|                                                |               | 8.0  | 30   | 8.0  | —    | 30   | 8.0  | 30   |         | $V_{DD} = 5.0V$ ( <a href="#">Note 1</a> )                                                  |
| Time Width of CLR                              | $t_{WCLR}$    | 55   | —    | 55   | —    | —    | 55   | —    | ns      | ( <a href="#">Note 1</a> )                                                                  |
| Setup Time Data to Clock                       | $t_{SU}$      | 21   | —    | 21   | —    | —    | 21   | —    | ns      | $V_{DD} = 3.0V$ ( <a href="#">Note 1</a> )                                                  |
|                                                |               | 7.0  | —    | 7.0  | —    | —    | 7.0  | —    |         | $V_{DD} = 5.0V$ ( <a href="#">Note 1</a> )                                                  |
| Hold Time Data from Clock                      | $t_H$         | 5.0  | —    | 5.0  | —    | —    | 5.0  | —    | ns      | $V_{DD} = 3.0V$ ( <a href="#">Note 1</a> )                                                  |
|                                                |               | 5.0  | —    | 5.0  | —    | —    | 5.0  | —    |         | $V_{DD} = 5.0V$ ( <a href="#">Note 1</a> )                                                  |
| Clock Frequency                                | $f_{CLK}$     | —    | 8    | —    | —    | 8    | —    | 8    | MHz     | $V_{DD} = 3.0V$                                                                             |
|                                                |               | —    | 20   | —    | —    | 20   | —    | 20   |         | $V_{DD} = 5.0V$ ( <a href="#">Note 1</a> )                                                  |
| Clock Rise and Fall Times                      | $t_R, t_F$    | —    | 50   | —    | —    | 50   | —    | 50   | ns      | ( <a href="#">Note 1</a> )                                                                  |
| Turn ON Time                                   | $t_{ON}$      | —    | 5.0  | —    | —    | 5.0  | —    | 5.0  | $\mu s$ | $V_{SIG} = V_{PP} - 10V$ ,<br>$R_{LOAD} = 10\text{ k}\Omega$                                |
| Turn OFF Time                                  | $t_{OFF}$     | —    | 5.0  | —    | —    | 5.0  | —    | 5.0  |         |                                                                                             |
| Maximum $V_{SIG}$ Slew Rate                    | $dv/dt$       | —    | 20   | —    | —    | 20   | —    | 20   | V/ns    | $V_{PP} = +40V, V_{NN} = -160V$<br>( <a href="#">Note 1</a> )                               |
|                                                |               | —    | 20   | —    | —    | 20   | —    | 20   |         | $V_{PP} = +100V, V_{NN} = -100V$<br>( <a href="#">Note 1</a> )                              |
|                                                |               | —    | 20   | —    | —    | 20   | —    | 20   |         | $V_{PP} = +160V, V_{NN} = -40V$<br>( <a href="#">Note 1</a> )                               |
| OFF Isolation                                  | $K_O$         | -30  | —    | -30  | -33  | —    | -30  | —    | dB      | $f = 5.0\text{ MHz}$ ,<br>$1.0\text{ k}\Omega/15\text{ pF}$ load ( <a href="#">Note 1</a> ) |
|                                                |               | -58  | —    | -58  | -60  | —    | -58  | —    |         | $f = 5.0\text{ MHz}$ , $50\Omega$ load<br>( <a href="#">Note 1</a> )                        |
| Switch Crosstalk                               | $K_{CR}$      | -60  | —    | -60  | -70  | —    | -60  | —    | dB      | $f = 5.0\text{ MHz}$ , $50\Omega$ load<br>( <a href="#">Note 1</a> )                        |
| Output Switch Isolation Diode Current          | $I_{ID}$      | —    | 300  | —    | —    | 300  | —    | 300  | mA      | 300 ns pulse width,<br>2.0% duty cycle ( <a href="#">Note 1</a> )                           |
| OFF Capacitance SW to GND                      | $C_{SG(OFF)}$ | —    | 14   | —    | 9.0  | 14   | —    | 14   | pF      | $V_{SIG} = 0V, f = 1.0\text{ MHz}$<br>( <a href="#">Note 1</a> )                            |
| ON Capacitance SW to GND                       | $C_{SG(ON)}$  | —    | 17   | —    | 12   | 17   | —    | 17   |         |                                                                                             |
| Output Voltage Spike (per Switch)              | $+V_{SPK}$    | —    | —    | —    | —    | 150  | —    | —    | mV      | $V_{PP} = +40V, V_{NN} = -160V$<br>$R_{LOAD} = 50\Omega$ ( <a href="#">Note 1</a> )         |
|                                                | $-V_{SPK}$    | —    | —    | —    | —    | 150  | —    | —    |         |                                                                                             |
|                                                | $+V_{SPK}$    | —    | —    | —    | —    | 150  | —    | —    |         | $V_{PP} = +100V, V_{NN} = -100V$<br>$R_{LOAD} = 50\Omega$ ( <a href="#">Note 1</a> )        |
|                                                | $-V_{SPK}$    | —    | —    | —    | —    | 150  | —    | —    |         |                                                                                             |
|                                                | $+V_{SPK}$    | —    | —    | —    | —    | 150  | —    | —    |         | $V_{PP} = +160V, V_{NN} = -40V$<br>$R_{LOAD} = 50\Omega$ ( <a href="#">Note 1</a> )         |
|                                                | $-V_{SPK}$    | —    | —    | —    | —    | 150  | —    | —    |         |                                                                                             |

**Note 1:** Specification is obtained by characterization and is not 100% tested.

# HV2662/HV2762

## AC ELECTRICAL CHARACTERISTICS (CONTINUED)

**Electrical Specifications:** Over recommended operating conditions unless otherwise specified.  
See test circuits in [Figure 3-2](#).

| Parameter                        | Symbol | 0°C  |      | 25°C |      |      | 70°C |      | Units | Conditions                                                     |
|----------------------------------|--------|------|------|------|------|------|------|------|-------|----------------------------------------------------------------|
|                                  |        | Min. | Max. | Min. | Typ. | Max. | Min. | Max. |       |                                                                |
| Charge Injection<br>(per Switch) | QC     | —    | —    | —    | 820  | —    | —    | —    | pC    | $V_{PP} = +40V, V_{NN} = -160V$<br>( <a href="#">Note 1</a> )  |
|                                  |        | —    | —    | —    | 600  | —    | —    | —    |       | $V_{PP} = +100V, V_{NN} = -100V$<br>( <a href="#">Note 1</a> ) |
|                                  |        | —    | —    | —    | 350  | —    | —    | —    |       | $V_{PP} = +160V, V_{NN} = -40V$<br>( <a href="#">Note 1</a> )  |

**Note 1:** Specification is obtained by characterization and is not 100% tested.

## TEMPERATURE SPECIFICATIONS

**Electrical Specifications:** Unless otherwise specified, for all specifications  $T_A = T_J = +25^\circ C$

| Parameter                          | Symbol        | Min | Typ | Max  | Units | Conditions |
|------------------------------------|---------------|-----|-----|------|-------|------------|
| <b>Temperature Ranges</b>          |               |     |     |      |       |            |
| Storage Temperature                | $T_A$         | -65 | —   | +150 | °C    |            |
| <b>Package Thermal Resistances</b> |               |     |     |      |       |            |
| Thermal Resistance, 64-Ball VFBGA  | $\theta_{ja}$ | —   | 36  | —    | °C/W  |            |

## 2.0 PIN DESCRIPTION

The locations of the balls are listed in [Package Types](#).

**TABLE 2-1: BALL DESCRIPTION 64-BALL VFBGA**

| Pin # | HV2662                 | HV2762                 | Description                           |
|-------|------------------------|------------------------|---------------------------------------|
| A1    | SW22B                  | SW22B                  | Analog switch 22 terminal B           |
| A2    | V <sub>NN</sub>        | V <sub>NN</sub>        | Negative supply voltage               |
| A3    | SW21B                  | SW21B                  | Analog switch 21 terminal B           |
| A4    | SW20B                  | SW20B                  | Analog switch 20 terminal B           |
| A5    | SW19B                  | SW19B                  | Analog switch 19 terminal B           |
| A6    | SW18B                  | SW18B                  | Analog switch 18 terminal B           |
| A7    | SW17B                  | SW17B                  | Analog switch 17 terminal B           |
| A8    | SW16B                  | SW16B                  | Analog switch 16 terminal B           |
| A9    | SW15B                  | SW15B                  | Analog switch 15 terminal B           |
| A10   | SW15A                  | SW15A                  | Analog switch 15 terminal A           |
| B1    | SW23B                  | SW23B                  | Analog switch 23 terminal B           |
| B2    | SW23A                  | SW23A                  | Analog switch 23 terminal A           |
| B3    | SW22A                  | SW22A                  | Analog switch 22 terminal A           |
| B4    | SW21A                  | SW21A                  | Analog switch 21 terminal A           |
| B5    | SW20A                  | SW20A                  | Analog switch 20 terminal A           |
| B6    | SW19A                  | SW19A                  | Analog switch 19 terminal A           |
| B7    | SW18A                  | SW18A                  | Analog switch 18 terminal A           |
| B8    | SW17A                  | SW17A                  | Analog switch 17 terminal A           |
| B9    | SW16A                  | SW16A                  | Analog switch 16 terminal A           |
| B10   | SW14B                  | SW14B                  | Analog switch 14 terminal B           |
| C1    | NC                     | NC                     | No connect                            |
| C2    | V <sub>PP</sub>        | V <sub>PP</sub>        | Positive supply voltage               |
| C9    | SW14A                  | SW14A                  | Analog switch 14 terminal A           |
| C10   | SW13B                  | SW13B                  | Analog switch 13 terminal B           |
| D1    | CLR                    | CLR                    | Latch clear logic input               |
| D2    | NC                     | RGND                   | No connect/Ground for bleed resistor  |
| D9    | V <sub>NN</sub>        | V <sub>NN</sub>        | Negative supply voltage               |
| D10   | SW13A                  | SW13A                  | Analog switch 13 terminal A           |
| E1    | $\overline{\text{LE}}$ | $\overline{\text{LE}}$ | Latch-enable logic input, low active  |
| E2    | CLK                    | CLK                    | Clock logic input for shift register  |
| E9    | SW12B                  | SW12B                  | Analog switch 12 terminal B           |
| E10   | SW12A                  | SW12A                  | Analog switch 12 terminal A           |
| F1    | V <sub>DD</sub>        | V <sub>DD</sub>        | Logic supply voltage                  |
| F2    | GND                    | GND                    | Ground                                |
| F9    | SW11B                  | SW11B                  | Analog switch 11 terminal B           |
| F10   | SW11A                  | SW11A                  | Analog switch 11 terminal A           |
| G1    | D <sub>IN</sub>        | D <sub>IN</sub>        | Data-in logic input                   |
| G2    | D <sub>OUT</sub>       | D <sub>OUT</sub>       | Data-out logic output                 |
| G9    | SW10B                  | SW10B                  | Analog switch 10 terminal B           |
| G10   | V <sub>NN</sub>        | V <sub>NN</sub>        | Negative supply voltage               |
| H1    | NC                     | RGND                   | No connect/ Ground for bleed resistor |
| H2    | V <sub>PP</sub>        | V <sub>PP</sub>        | Positive supply voltage               |

# HV2662/HV2762


**TABLE 2-1: BALL DESCRIPTION 64-BALL VFBGA (CONTINUED)**

| Pin # | HV2662          | HV2762          | Description                 |
|-------|-----------------|-----------------|-----------------------------|
| H9    | SW10A           | SW10A           | Analog switch 10 terminal A |
| H10   | SW9B            | SW9B            | Analog switch 9 terminal B  |
| J1    | SW0A            | SW0A            | Analog switch 0 terminal A  |
| J2    | SW0B            | SW0B            | Analog switch 0 terminal B  |
| J3    | SW1B            | SW1B            | Analog switch 1 terminal B  |
| J4    | SW2B            | SW2B            | Analog switch 2 terminal B  |
| J5    | SW3B            | SW3B            | Analog switch 3 terminal B  |
| J6    | SW4B            | SW4B            | Analog switch 4 terminal B  |
| J7    | SW5B            | SW5B            | Analog switch 5 terminal B  |
| J8    | SW6B            | SW6B            | Analog switch 6 terminal B  |
| J9    | SW7B            | SW7B            | Analog switch 7 terminal B  |
| J10   | SW9A            | SW9A            | Analog switch 9 terminal A  |
| K1    | SW1A            | SW1A            | Analog switch 1 terminal A  |
| K2    | V <sub>NN</sub> | V <sub>NN</sub> | Negative supply voltage     |
| K3    | SW2A            | SW2A            | Analog switch 2 terminal A  |
| K4    | SW3A            | SW3A            | Analog switch 3 terminal A  |
| K5    | SW4A            | SW4A            | Analog switch 4 terminal A  |
| K6    | SW5A            | SW5A            | Analog switch 5 terminal A  |
| K7    | SW6A            | SW6A            | Analog switch 6 terminal A  |
| K8    | SW7A            | SW7A            | Analog switch 7 terminal A  |
| K9    | SW8A            | SW8A            | Analog switch 8 terminal A  |
| K10   | SW8B            | SW8B            | Analog switch 8 terminal B  |





## 3.1 Application Information

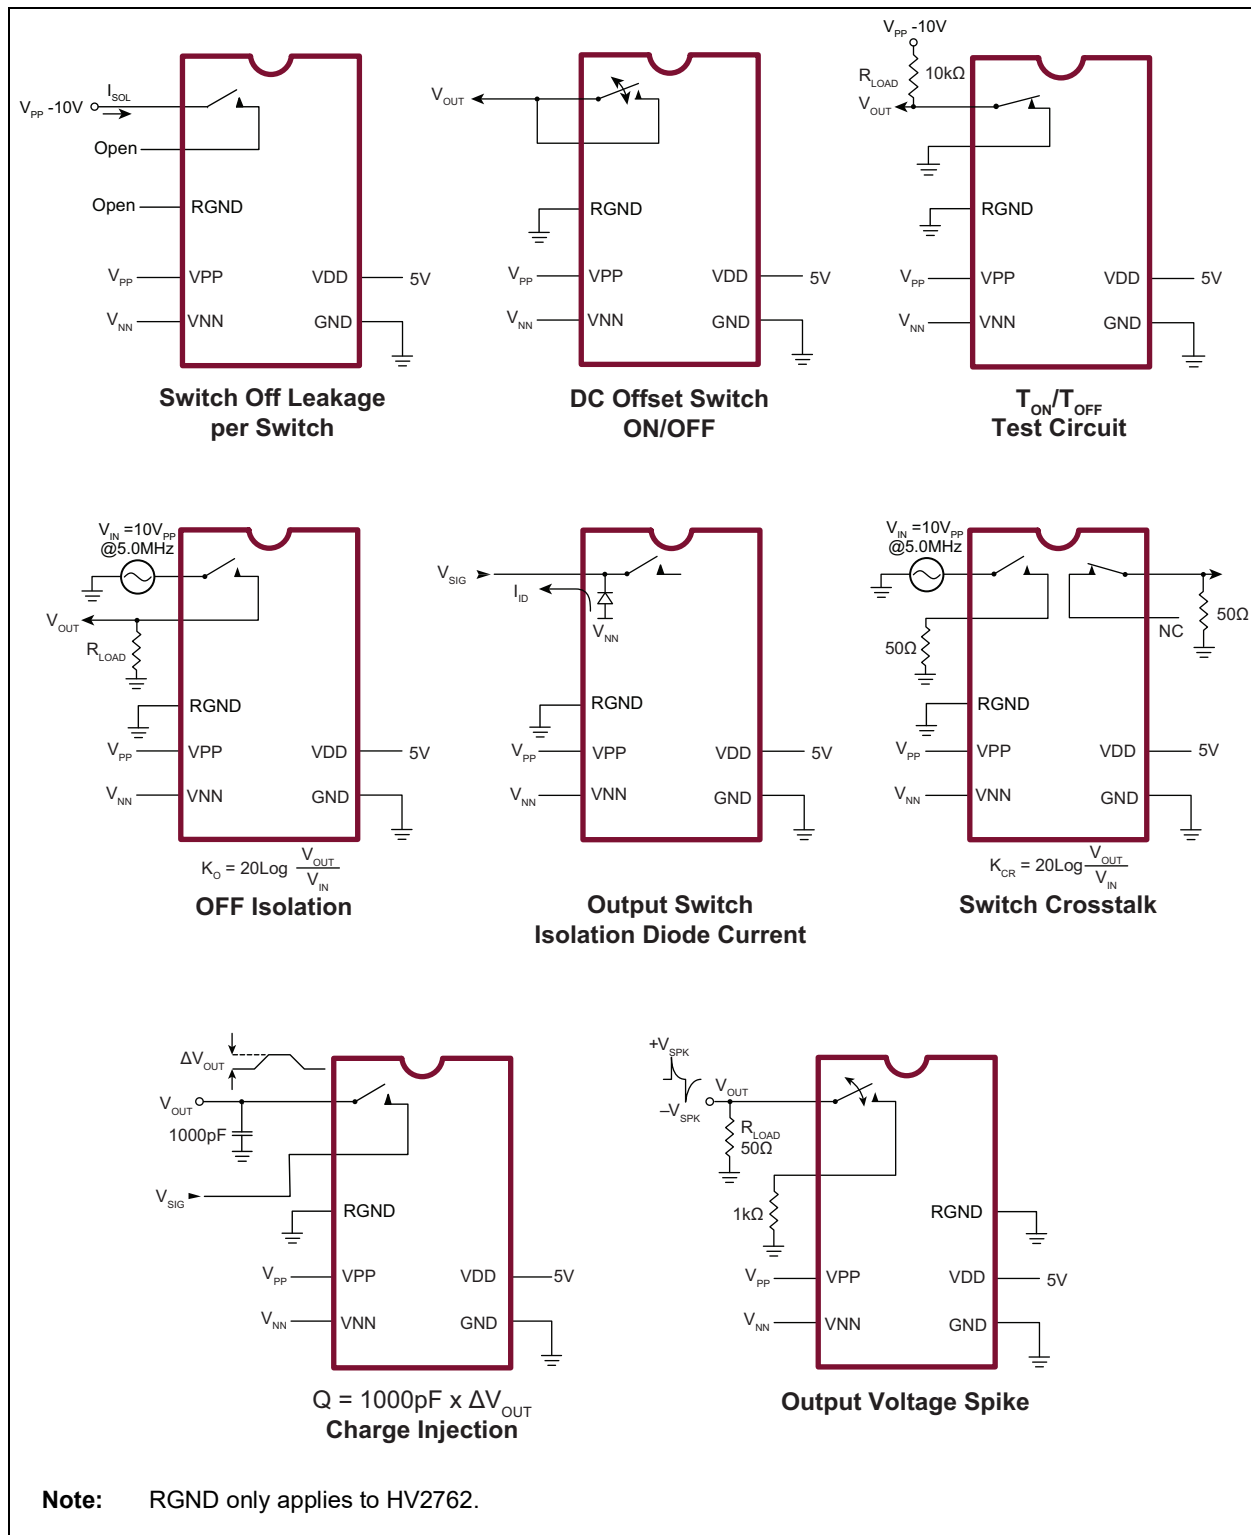


**FIGURE 3-2:** Test Circuits.


## 4.0 PACKAGING INFORMATION

### 4.1 Package Marking Information

64-Ball VFBGA

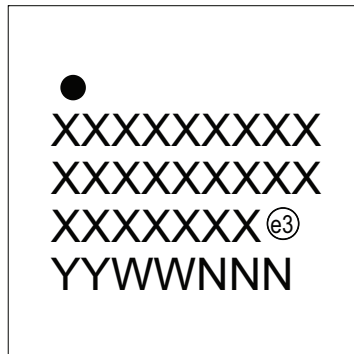

Example

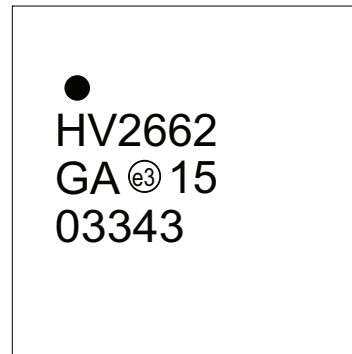


|                |        |                                                                                                                  |
|----------------|--------|------------------------------------------------------------------------------------------------------------------|
| <b>Legend:</b> | XX...X | Product Code or Customer-specific information                                                                    |
|                | Y      | Year code (last digit of calendar year)                                                                          |
|                | YY     | Year code (last 2 digits of calendar year)                                                                       |
|                | WW     | Week code (week of January 1 is week '01')                                                                       |
|                | NNN    | Alphanumeric traceability code                                                                                   |
|                | (e3)   | Pb-free JEDEC <sup>®</sup> designator for Matte Tin (Sn)                                                         |
|                | *      | This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package. |

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for product code or customer-specific information. Package may or not include the corporate logo.

## 64-Ball Very Thin Fine Pitch Ball Grid Array (GA) - 7x7x1.0 mm Body [VFBGA] Supertex Legacy



**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

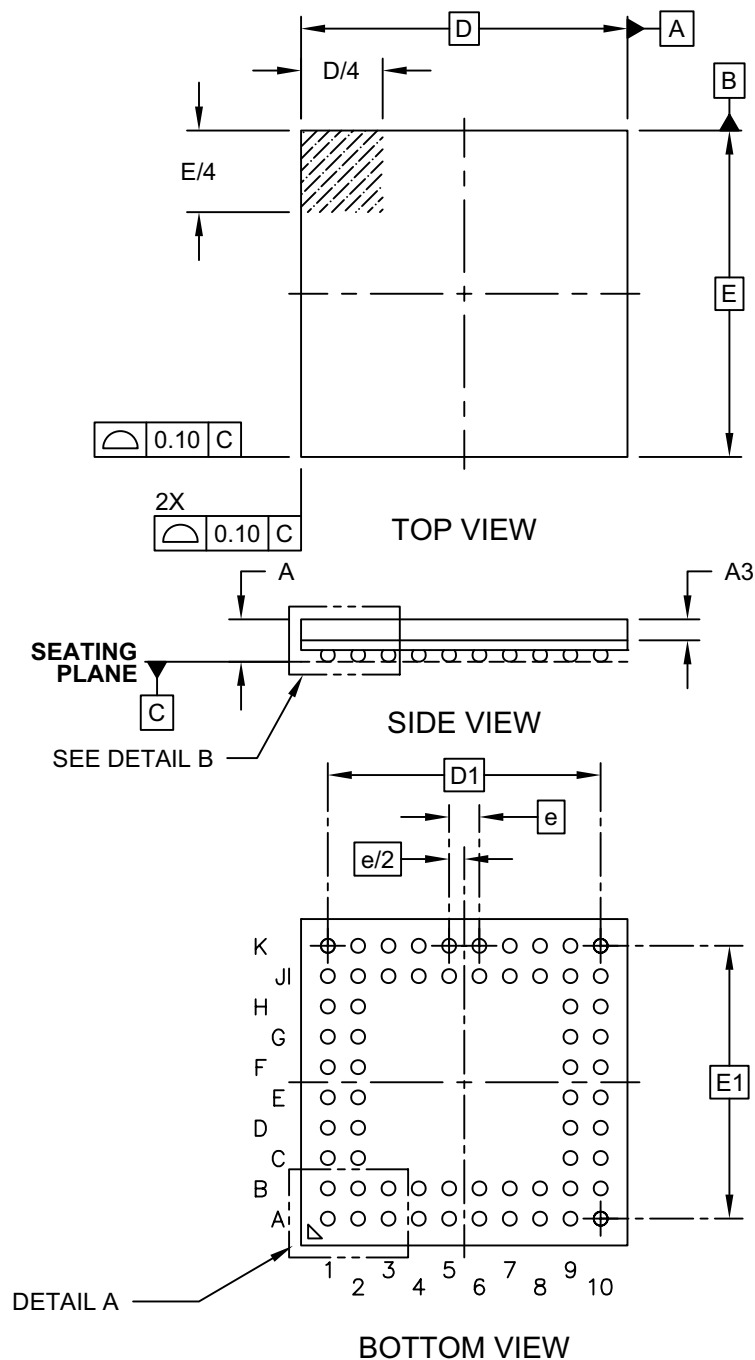

Microchip Technology Drawing C04-370-GA Rev A Sheet 1 of 2

## 64-Ball Very Thin Fine Pitch Ball Grid Array (GA) - 7x7x1.0 mm Body [VFBGA] Supertex Legacy

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

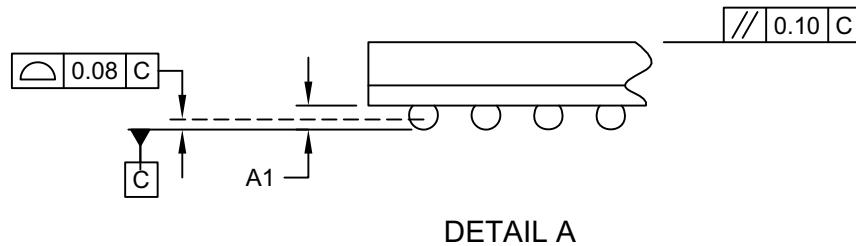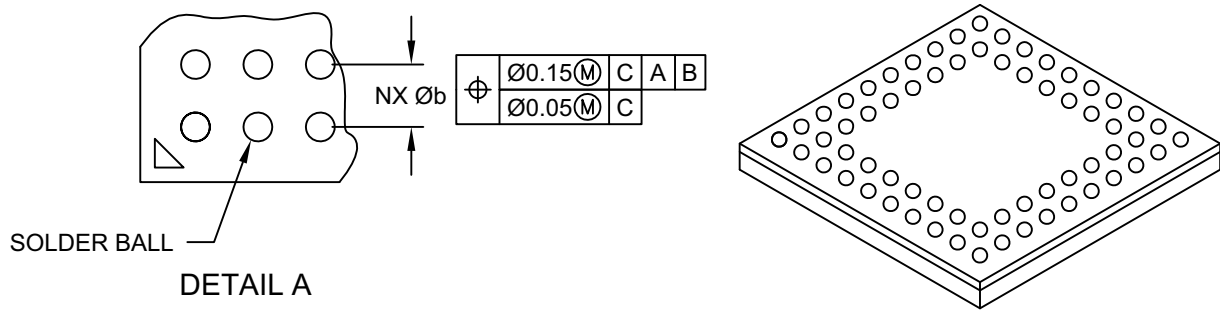

| Units                |                 | MILLIMETERS |      |      |
|----------------------|-----------------|-------------|------|------|
| Dimension Limits     |                 | MIN         | NOM  | MAX  |
| Number of Pins       | N               | 64          |      |      |
| Pitch                | e               | 0.65 BSC    |      |      |
| Overall Height       | A               | -           | -    | 1.00 |
| Standoff             | A1              | 0.16        | -    | 0.25 |
| Molded Cap Thickness | A3              | 0.45 REF    |      |      |
| Overall Width        | E               | 7.00 BSC    |      |      |
| Overall Ball Pitch   | E1              | 5.85 BSC    |      |      |
| Overall Length       | D               | 7.00 BSC    |      |      |
| Overall Ball Pitch   | D1              | 5.85 BSC    |      |      |
| Ball Diameter        | $\varnothing b$ | 0.25        | 0.30 | 0.35 |

### Notes:


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
  - REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-370-GA Rev A Sheet 2 of 2

# HV2662/HV2762

## 64-Ball Very Thin Fine Pitch Ball Grid Array (GA) - 7x7x1.0 mm Body [VFBGA]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

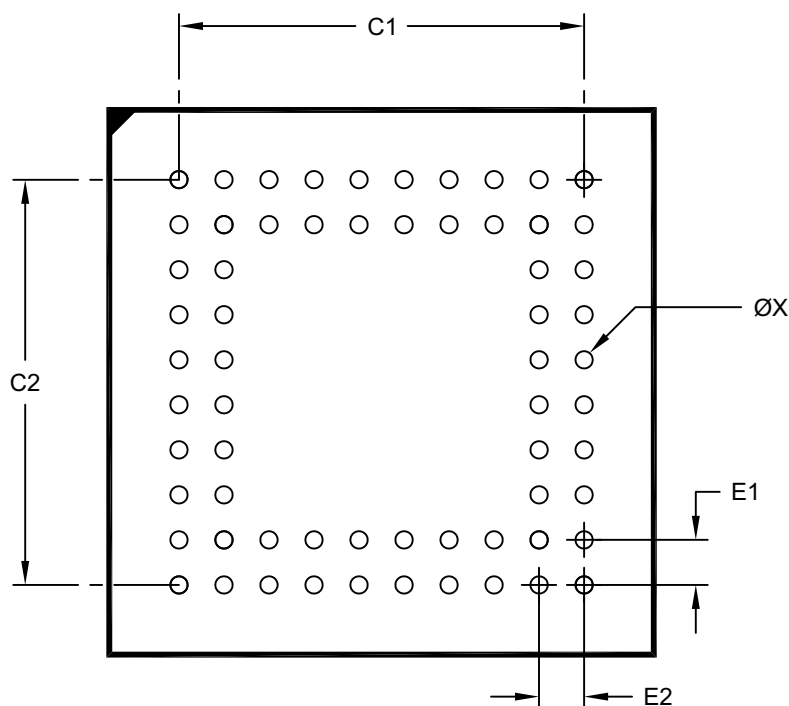

### RECOMMENDED LAND PATTERN

|                            |    | Units | MILLIMETERS |          |     |
|----------------------------|----|-------|-------------|----------|-----|
| Dimension Limits           |    |       | MIN         | NOM      | MAX |
| Contact Pitch              | E1 |       |             | 0.65 BSC |     |
| Contact Pitch              | E2 |       |             | 0.65 BSC |     |
| Contact Pad Spacing        | C1 |       |             | 5.85     |     |
| Contact Pad Spacing        | C2 |       |             | 5.85     |     |
| Contact Pad Diameter (X64) | X  |       |             | 0.25     |     |

#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2370-GA Rev A

## APPENDIX A: REVISION HISTORY

### Revision A (May 2016)

- Converted Supertex Docs #'s DSFP-2662 and DSFP-HV2762 to Microchip DS20005372.
- Merged HV2662 and HV2762 into one document.
- Updated **“Product Identification System”**.  
Removed parts with a package code of “LA”;  
Added package “GA”.
- EOL of 64-Ball LFGA package (LB) per PCN JAON-20WQKC840.
- Added information for 64-Ball VFBGA (GA) throughout.
- Minor text changes throughout.

### Revision B (August 2020)

- Updated **Packaging Information** section.
- Made minor typographical corrections.

# HV2662/HV2762

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| <u>PART NO.</u> | <u>XX</u>                                                                                           | - | <u>X</u>      | - | <u>X</u>   |
|-----------------|-----------------------------------------------------------------------------------------------------|---|---------------|---|------------|
| Device          | Package Options                                                                                     |   | Environmental |   | Media Type |
| Device:         | HV2662 = 24-Channel, HV Analog Switch<br>HV2762 = 24-Channel, HV Analog Switch with Bleed Resistors |   |               |   |            |
| Package:        | GA = 64-ball VFBGA                                                                                  |   |               |   |            |
| Environmental   | G = Lead (Pb)-free/RoHS-compliant package                                                           |   |               |   |            |
| Media Type:     | (blank) = 120/Tray for GA package                                                                   |   |               |   |            |

| Examples: |                                             |
|-----------|---------------------------------------------|
| a)        | HV2662GA-G: 64-ball VFBGA package, 120/Tray |
| b)        | HV2762GA-G: 64-ball VFBGA package, 120/Tray |



---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

### Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzr, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2016-2020, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-6674-1

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820