
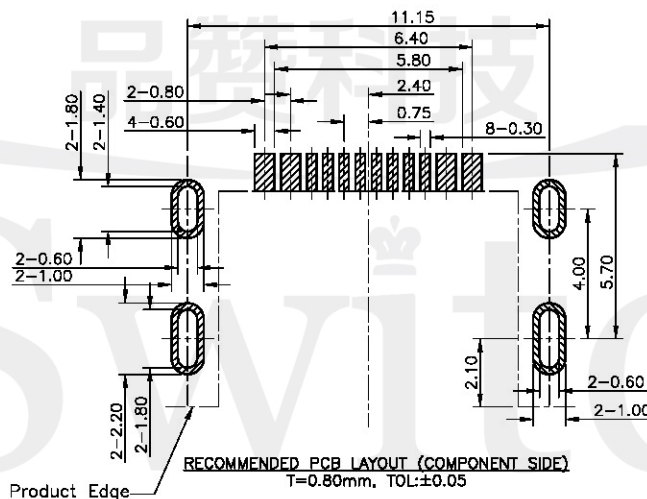
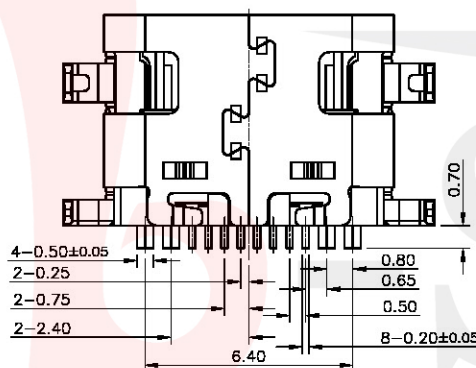
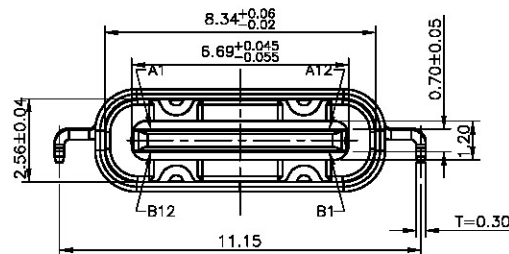
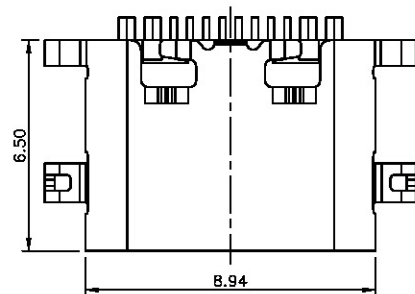
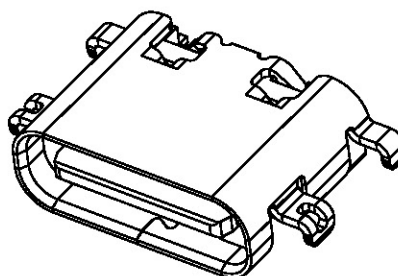


A=L0.8mm
B=L1.1mm
C=L1.6mm
D=L2.1mm

- NOTES:
1. CURRENT RATING: 3A MAX.;
 2. DIELECTRIC WITHSTANDING: 100V AC MIN.;
 3. TEMPERATURE RANGE: -30°C~85°C;
 4. CONTACT RESISTANCE: 40mΩ MAX.;
 5. INSULATION RESISTANCE: 100MΩ MIN.;
 6. DURABILITY: 10,000 CYCLES MIN.;
 7. INSERTION FORCE: 5N~20N;
 8. EXTRACTION FORCE:
(1) INITIAL: 8N~20N;
(2) AFTER DURABILITY: 6N~20N.
 9. PRODUCT MEET THE REQUEST OF THE RoHS.

A1			A4	A5	A6	A7	A8	A9			A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12			B9	B8	B7	B6	B5	B4			B1

PIN ASSIGNMENT
(FRONT VIEW)

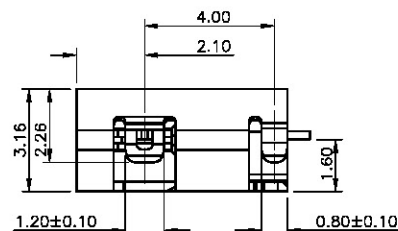

RoHS
Compliant
2002/95/EC



Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic Technology CO.,Ltd.

DESIGN 陈锋枫	DATE 2016.05.29	TITLE:
CHECKED	DATE	GT-USB-7014X
APPROVED	DATE	
http://www.dg-switch.com		REV.: X1
TEL:0769-82388879		SCALE: 4:1
		UNIT: mm
		SHEET: 1/1