

A

A

B

B

C

C

D

D

E


E

F

F

H

H

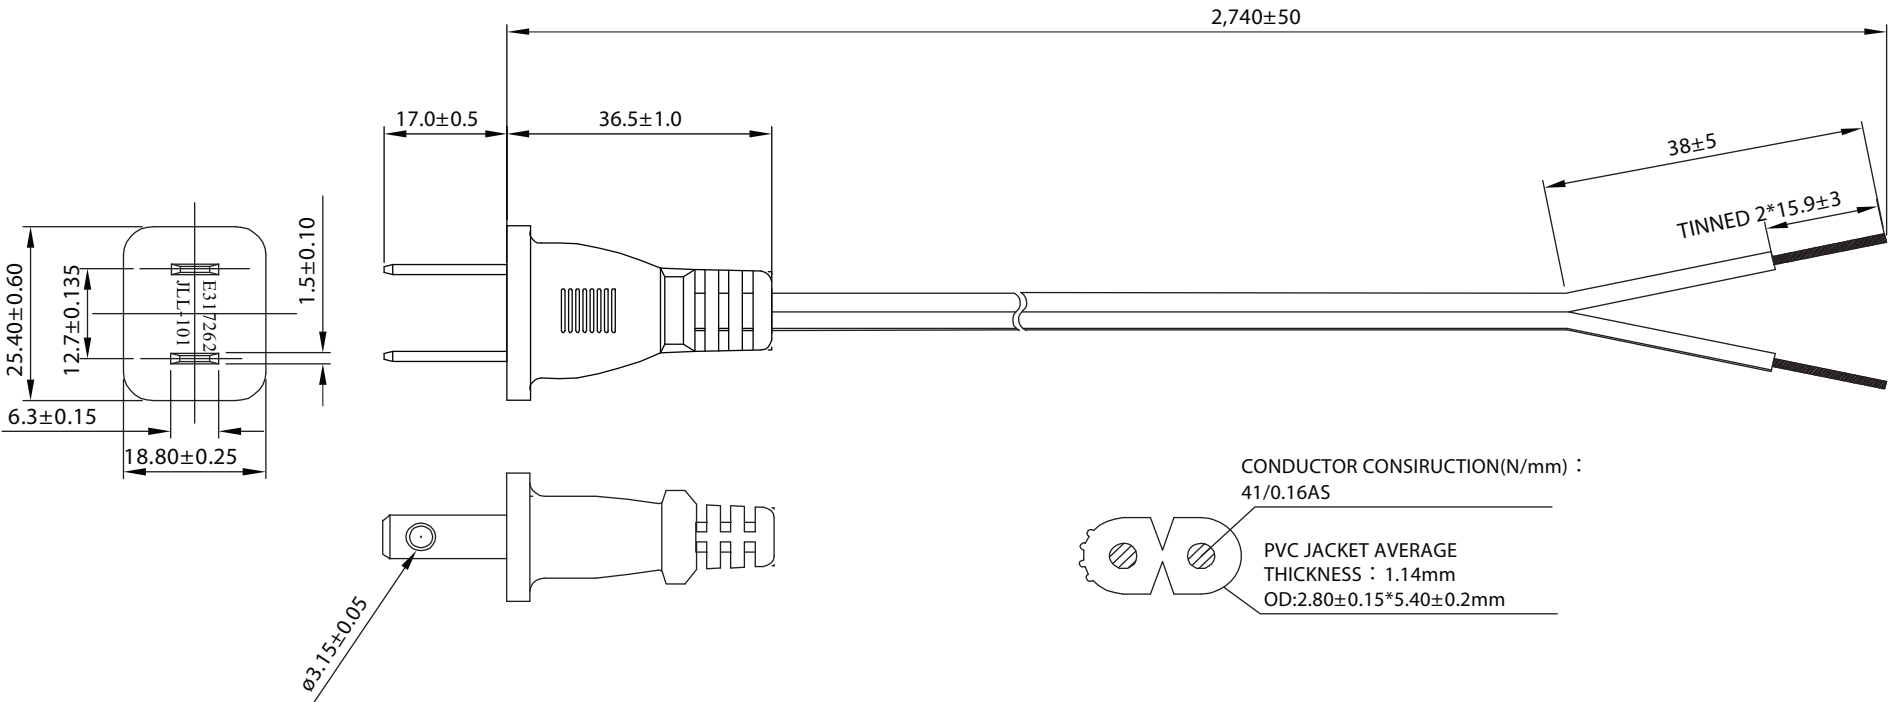

CONDUCTOR CONSTRUCTION(N/mm) :  
41/0.16AS

PVC JACKET AVERAGE THICKNESS : 1.14mm  
OD: 2.80±0.15\*5.40±0.2mm


**Material:**

- E243711(UL) SPT-1 2 x 18AWG(0.824MM<sup>2</sup>)  
VW-1 60°C 300V  
- CSA 228191
- Jacket Color: Black

**Electrical:**

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

Unit: MM

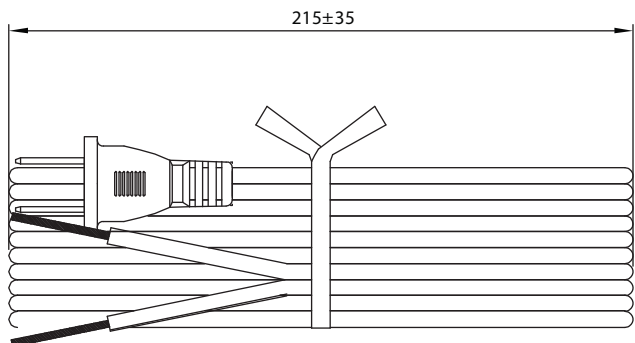

Scale	1:1						Name
TOLERANCE					Drawn	11.27.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						



Item No.	<b>AK500-OE-12-NP-9F-R</b>
Title	Power Cord - SPT-1/Open End, Non-Polarized, Unshielded, 60°C, 9 Feet
Drawing No.	
Replace	rev00
Sheet	