

Termination Board

HiCTB08-FBM-RAC-SC-IO08


- System board for Schneider, Foxboro FBM series
- For 8 modules
- For 8-channel cards FBM201/214(b)/216(b) (AI), FBM215/218/237 (AO), FBM204/205 (AI/AO), FBM244 (AI/AO), FBM247/248 (UIO)
- 24 V DC supply
- Recommended modules: HiC2025 (AI), HiC2031 (AO), HiC2081 (TI), HiC2883 (DO), HiC2441 (UIO)
- Hazardous area: screw terminals, blue
- Non-hazardous area: Sub-D connector (male), 25-pin



Function

The function of the termination board and the connector pin assignment are exactly fitted to the requirements of the Foxboro FBM system. The signal is output to the process control system via the system connector. Information about a missing supply voltage of the isolated barriers is available for the system as a volt-free contact. Wiring errors from field side will be reported via the same relay contact, if this function is supported by the isolators. The termination board has a robust glass fiber reinforced plastic housing. The termination board is mounted in the switch cabinet on a 35 mm DIN mounting rail according to EN 60175.

Connection

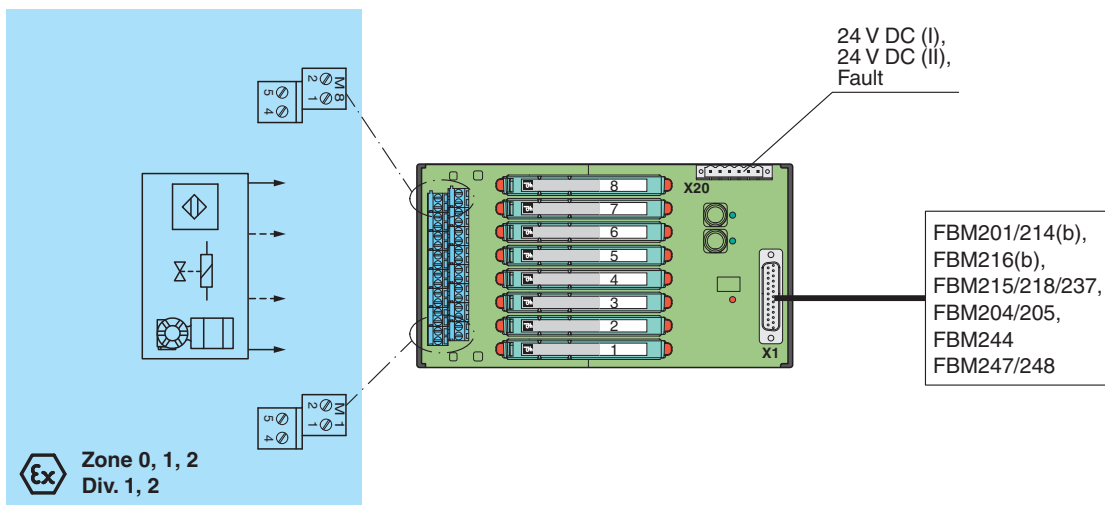

Technical Data

Supply

Connection	X20: terminals 3, 5(+); 4, 6(-)
Nominal voltage	24 V DC , in consideration of rated voltage of used isolators
Voltage drop	0.9 V , voltage drop across the series diode on the termination board must be considered
Ripple	≤ 10 %
Fusing	2 A , in each case for 8 modules
Power dissipation	≤ 500 mW , without modules
Reverse polarity protection	yes

Redundancy

Supply Redundancy available. The supply for the isolators is decoupled, monitored and fused.

Release date: 2021-01-25 Date of issue: 2021-01-25 Filename: 319784_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Fault indication output	
Connection	X20: terminals 1, 2
Output type	volt-free contact
Switch behaviour	no fault: relay contact closed power supply fault: relay contact open module fault: relay contact open
Contact loading	30 V DC, 1 A
Indicators/settings	
Display elements	LED PWR1 (termination board power supply), green LED LED PWR2 (termination board power supply), green LED LED FAULT (fault indication), red LED - LED lits: module fault - LED flashes: power supply fault
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Conformity	
Electromagnetic compatibility	NE 21:2017 For further information see system description.
Degree of protection	IEC 60529:2001
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications	
Degree of protection	IP20
Connection	
Field side	explosion hazardous area: 4 screw terminals per module , blue
Control side	non-explosion hazardous area: 1 25-pin Sub-D connector
Supply	pluggable screw terminals , black
Fault output	pluggable screw terminals , black
Core cross-section	screw terminals: 0.25 ... 1.5 mm ² (24 ... 12 AWG)
Material	housing: polycarbonate, 10 % glass fiber reinforced
Mass	approx. 380 g
Dimensions	108 x 200 x 163 mm (4.25 x 7.9 x 6.42 inch) , height including module assembly
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas	
EU-type examination certificate	CESI 06 ATEX 022
Marking	⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1)D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Non-hazardous area	
Maximum safe voltage	250 V (Attention! U _m is no rated voltage.)
Galvanic isolation	
Field circuit/control circuit	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 50303:2000
International approvals	
UL approval	E106378
Control drawing	116-0327
IECEx approval	
IECEx certificate	IECEx CES 06.0003
IECEx marking	[Ex ia Ga] IIC [Ex ia Da] IIIC [Ex ia Ma] I
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Release date: 2021-01-25 Date of issue: 2021-01-25 Filename: 319784_eng.pdf

Accessories


	H-CJC-Pt100	Resistance thermometer for cold junction compensation for H-System termination boards
	HiALC-HiCTB-SET-108	Label carriers for HiC termination boards

Application

For detailed listing of connectable cards and recommended modules see application section.

Application

Typical loop

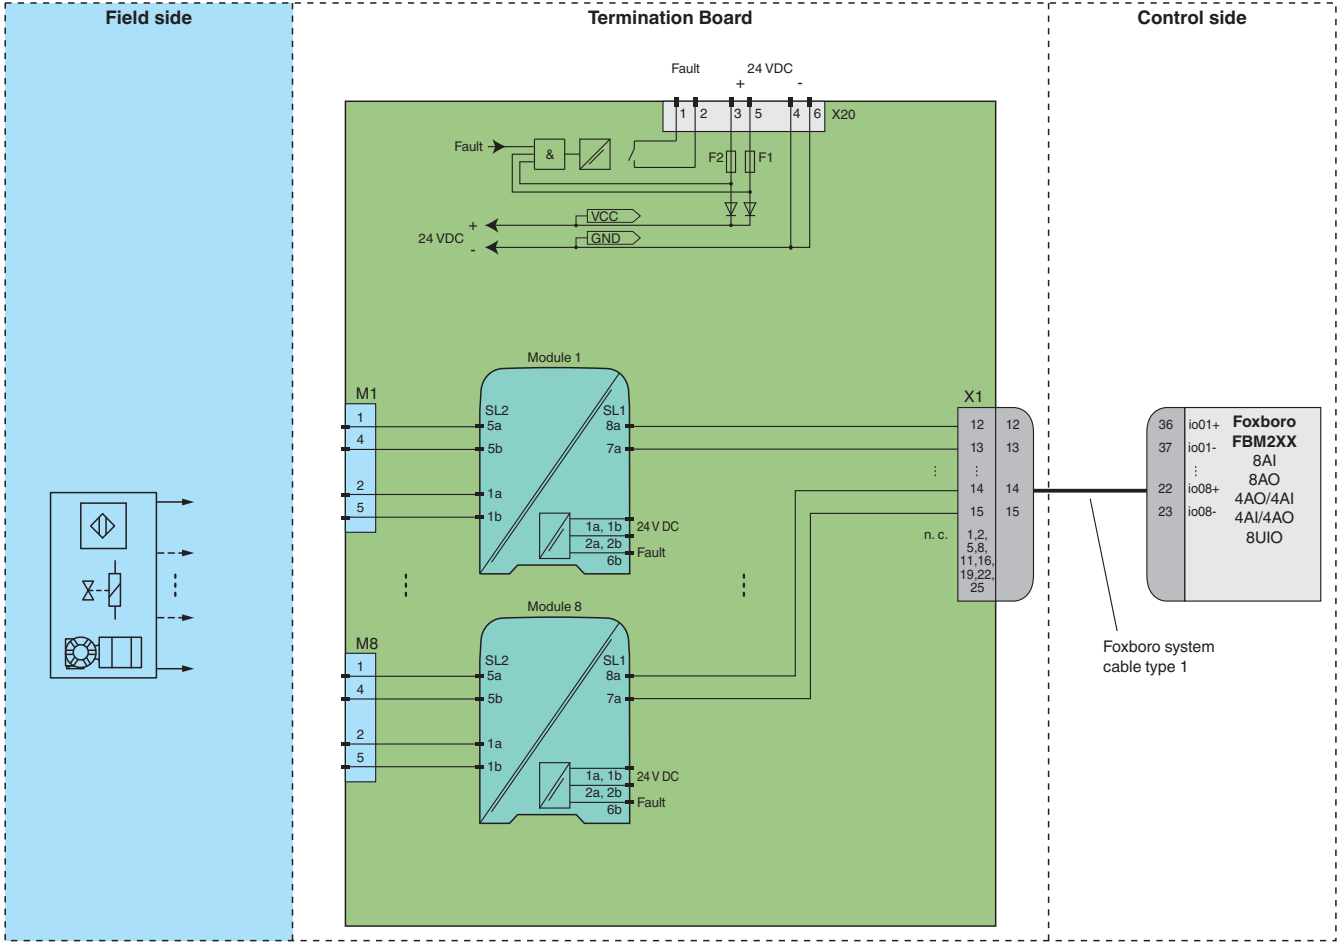

For exact pin assignment for connection to field side and control side, see the documentation of the isolated barrier.



The pin-out configuration has to be observed. For information see corresponding pin-out table on www.pepperl-fuchs.com.

Possible card/module combinations

Card	Signal	Recommended modules
FBM201, FBM214, FBM214b, FBM216, FBM216b	8AI	HiC2025, HiC2081
FBM215, FBM218, FBM237	8AO	HiC2031
FBM204, FBM205	4AO/4AI	HiC2031 (module 1 to module 4) and HiC2025 (module 5 to module 8)
FBM244	4AI/4AO	HiC2025 (module 1 to module 4) and HiC2031 (module 5 to module 8)
FBM247, FBM248	8UIO	HiC2441, HiC2081, HiC2883

Release date: 2021-01-25 Date of issue: 2021-01-25 Filename: 319784_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Module switch settings

Type (AI)	DIP switch	Position
HiC2025 (current source)	S1	OFF
	S2	OFF
	S3	ON
	S4	OFF

Type (AO)	DIP switch	Position
HiC2031 (open loop voltage of the control system < 27 V)	S1	OFF
	S2	ON
	S3	OFF
	S4	OFF

Type (UIO)	
HiC2441	not available

Type (TI)	DIP switch	Position
HiC2081 (current source)	S	I

Type (DO)	DIP switch	Position
HiC2883 (line fault detection enabled, operating mode bus powered with logic input, minmum load disabled)	S1	I
	S2	II
	S3	II
	S4	no function

Release date: 2021-01-25 Date of issue: 2021-01-25 Filename: 319784_eng.pdf