

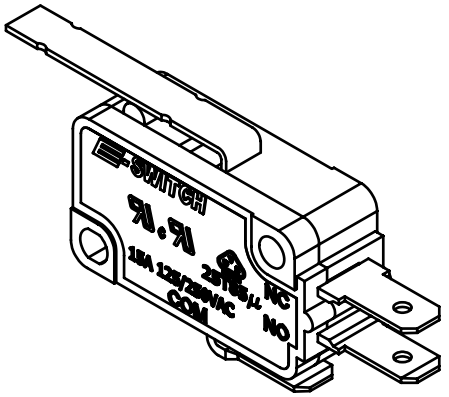


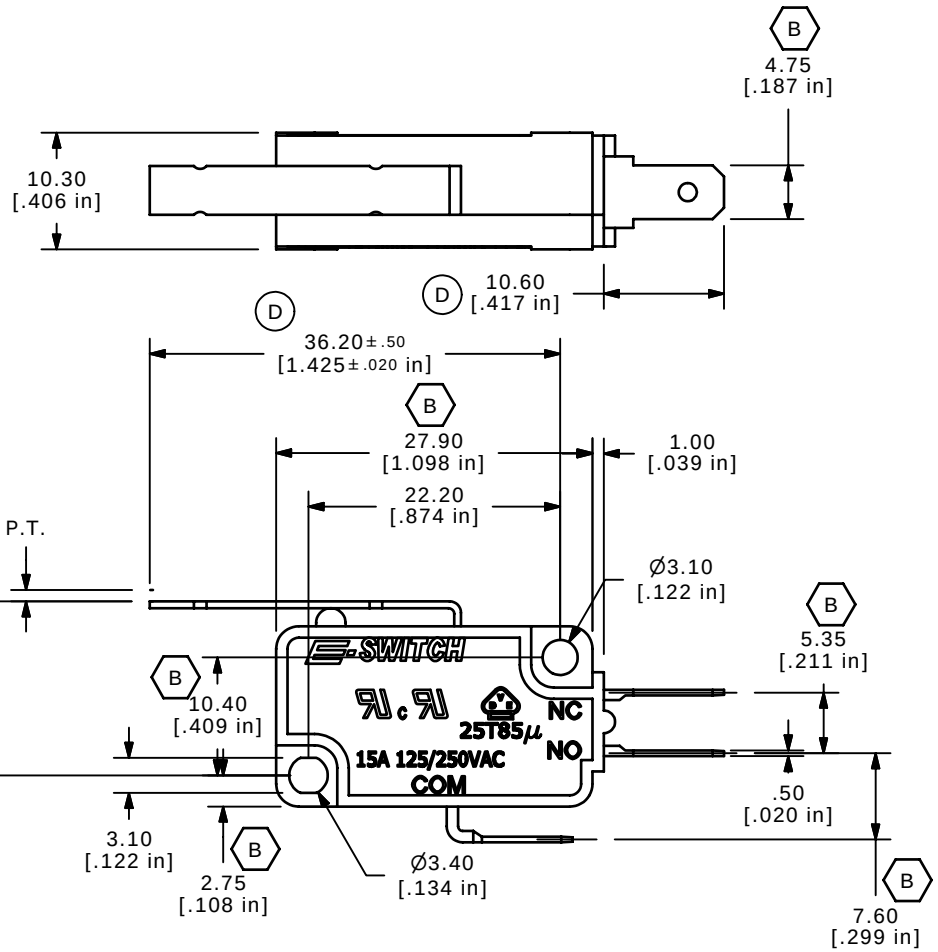


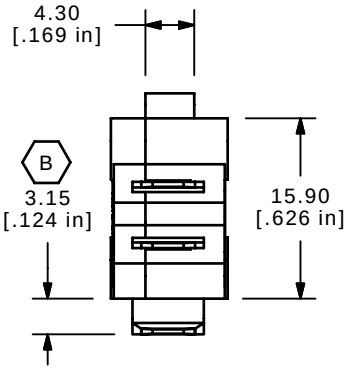

B ▲

O.P. (MM)	P.T. (MM)
15.5±0.8	4.1 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



CIRCUIT: SPDT

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 15A @125/250VAC UL, CUL, VDE APPROVED
▲ 4. OPERATING FORCE: 75± 25 GRAMS
5. OPERATING TEMP: -25˚C TO 85˚C (C)
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP. (D)
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT (D)

REV	PCR NO	DESCRIPTION	DATE	BY
D	15603	CHANGES NOTED	12/13/05	PH
C	15058	CORRECTED DIMENSION AND NOTE 4	7/5/05	JB
B	14890	CHANGED DIMMENSIONS AND NOTES	5/2/05	JB
A	14712	RELEASED FOR PRODUCTION	3/9/05	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE LS0851502F075C1A

SCALE	DATE	DR	DWG	REV
1.5:1	2/25/2005	AR	Q950004	D