


CMOS 8-bit Single Chip Microcomputer

Description

The CXP82432A/82440A is a CMOS 8-bit single chip microcomputer integrating on a single chip an A/D converter, serial interface, timer/counter, time base timer, capture timer counter, fluorescent display tube controller/driver, remote control reception circuit, CTL duty detection circuit, 14-bit PWM output and high-speed output circuit besides the basic configurations of 8-bit CPU, ROM, RAM, and I/O port.

The CXP82432A/82440A also provides sleep/stop function that enables lower power consumption.

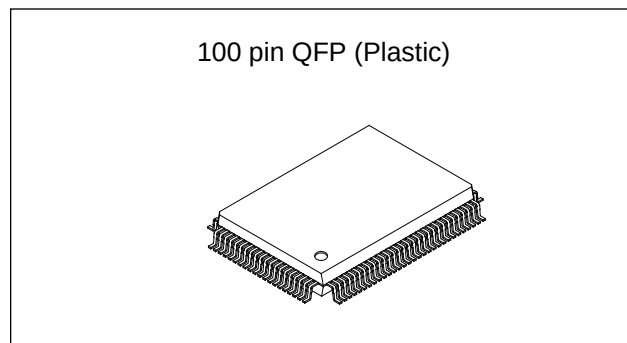

Structure

Silicon gate CMOS IC


Features

- Wide-range instruction system (213 instructions) to cover various types of data
 - 16-bit arithmetic/multiplication and division/boolean bit operation instructions
- Minimum instruction cycle
 - 400ns at 10MHz operation
 - (122μs at 32kHz operation)
- Incorporated ROM capacity
 - 32K bytes (CXP82432A)
 - 40K bytes (CXP82440A)
- Incorporated RAM capacity
 - 1120 bytes (including fluorescent display area)
- Peripheral functions
 - A/D converter
 - 8-bit, 8-channel, successive approximation method
 - (Conversion time of 32μs/10MHz)
 - Serial interface
 - 8-bit, 8-stage FIFO incorporated
 - (Auto transfer for 1 to 8 bytes), 1 channel
 - 8-bit clock synchronized type, 1 channel
 - Timers
 - 8-bit timer, 8-bit timer/counter, 19-bit time base timer
 - 16-bit capture timer/counter, 32kHz timer/counter
 - Fluorescent display tube controller/driver
 - Maximum of 384 segments display possible
 - 1 to 16-digit dynamic display
 - Dimmer function
 - High voltage drive output (40V)
 - Incorporated pull-down resistor (Mask option)
 - Hardware key scan function
 - Maximum of 16 x 8 key matrix compatible
 - Incorporated noise elimination circuit
 - 8-bit pulse measuring counter, 6-stage FIFO
 - 14 bits, 1 channel
- Remote control reception circuit
 - Precision of 800ns at 10MHz, 4 outputs
 - 19 factors, 15 vectors, multi-interruption possible
- PWM output circuit
 - SLEEP/STOP
- CTL duty detection circuit
 - 100-pin plastic QFP
- High-speed output circuit
 - CXP82400A 100-pin ceramic QFP
- Interruption
- Standby mode
- Package
- Piggyback/evaluation chip

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

The diagram illustrates the internal architecture and peripheral connections of the SPC700 microcontroller. The central core consists of the SPC 700 CPU CORE, ROM (32K/40K BYTES), and RAM (1120 BYTES), all interfaced with a common system bus. The CPU CORE is connected to the CLOCK GEN./SYSTEM CONTROL block, which manages the internal clock and system control signals. The INTERRUPT CONTROLLER is connected to the CPU CORE and the system bus, handling various interrupt signals. The peripheral interface includes an A/D CONVERTER, FDC CONTROLLER/DRIVER, 14 BIT PWM GENERATOR, CTL DUTY DET, REMOCON, SERIAL INTERFACE UNIT 0, SERIAL INTERFACE UNIT 1, 8 BIT TIMER/COUNTER 0, 8 BIT TIMER 1, and 16 BIT CAPTURE TIMER/COUNTER 2. The microcontroller also features a REAL TIME PULSE GENERATOR with two channels (CH0 and CH1) and a 32kHz TIMER/COUNTER. The pin connections are categorized into several groups: PA0/AN0 to PA7/AN7 (8 pins), T0 to T7 (8 pins), T15/S24 to T8/S31 (8 pins), PD0/S0 to PI7/S23 (24 pins), VDDP (1 pin), PE6/PWM (1 pin), PE5/CTL (1 pin), PE7/DDO (1 pin), PE4/RMC (1 pin), PB1/CS0 (1 pin), PB3/SI0 (1 pin), PB4/SO0 (1 pin), PB2/SCK0 (1 pin), PB6/SI1 (1 pin), PB7/SO1 (1 pin), PB5/SCK1 (1 pin), PE0/INT0/EC0 (1 pin), PE7/TO (1 pin), PB0/CINT (1 pin), PE1/INT2/EC1 (1 pin), and PE7/ADJ (1 pin). The microcontroller also has a 32kHz TIMER/COUNTER, a PRESCALER/TIME BASE TIMER, and a REAL TIME PULSE GENERATOR. The pin connections are categorized into several groups: PA0/AN0 to PA7/AN7 (8 pins), T0 to T7 (8 pins), T15/S24 to T8/S31 (8 pins), PD0/S0 to PI7/S23 (24 pins), VDDP (1 pin), PE6/PWM (1 pin), PE5/CTL (1 pin), PE7/DDO (1 pin), PE4/RMC (1 pin), PB1/CS0 (1 pin), PB3/SI0 (1 pin), PB4/SO0 (1 pin), PB2/SCK0 (1 pin), PB6/SI1 (1 pin), PB7/SO1 (1 pin), PB5/SCK1 (1 pin), PE0/INT0/EC0 (1 pin), PE7/TO (1 pin), PB0/CINT (1 pin), PE1/INT2/EC1 (1 pin), and PE7/ADJ (1 pin). The microcontroller also has a 32kHz TIMER/COUNTER, a PRESCALER/TIME BASE TIMER, and a REAL TIME PULSE GENERATOR.

Pin Assignment (Top View)

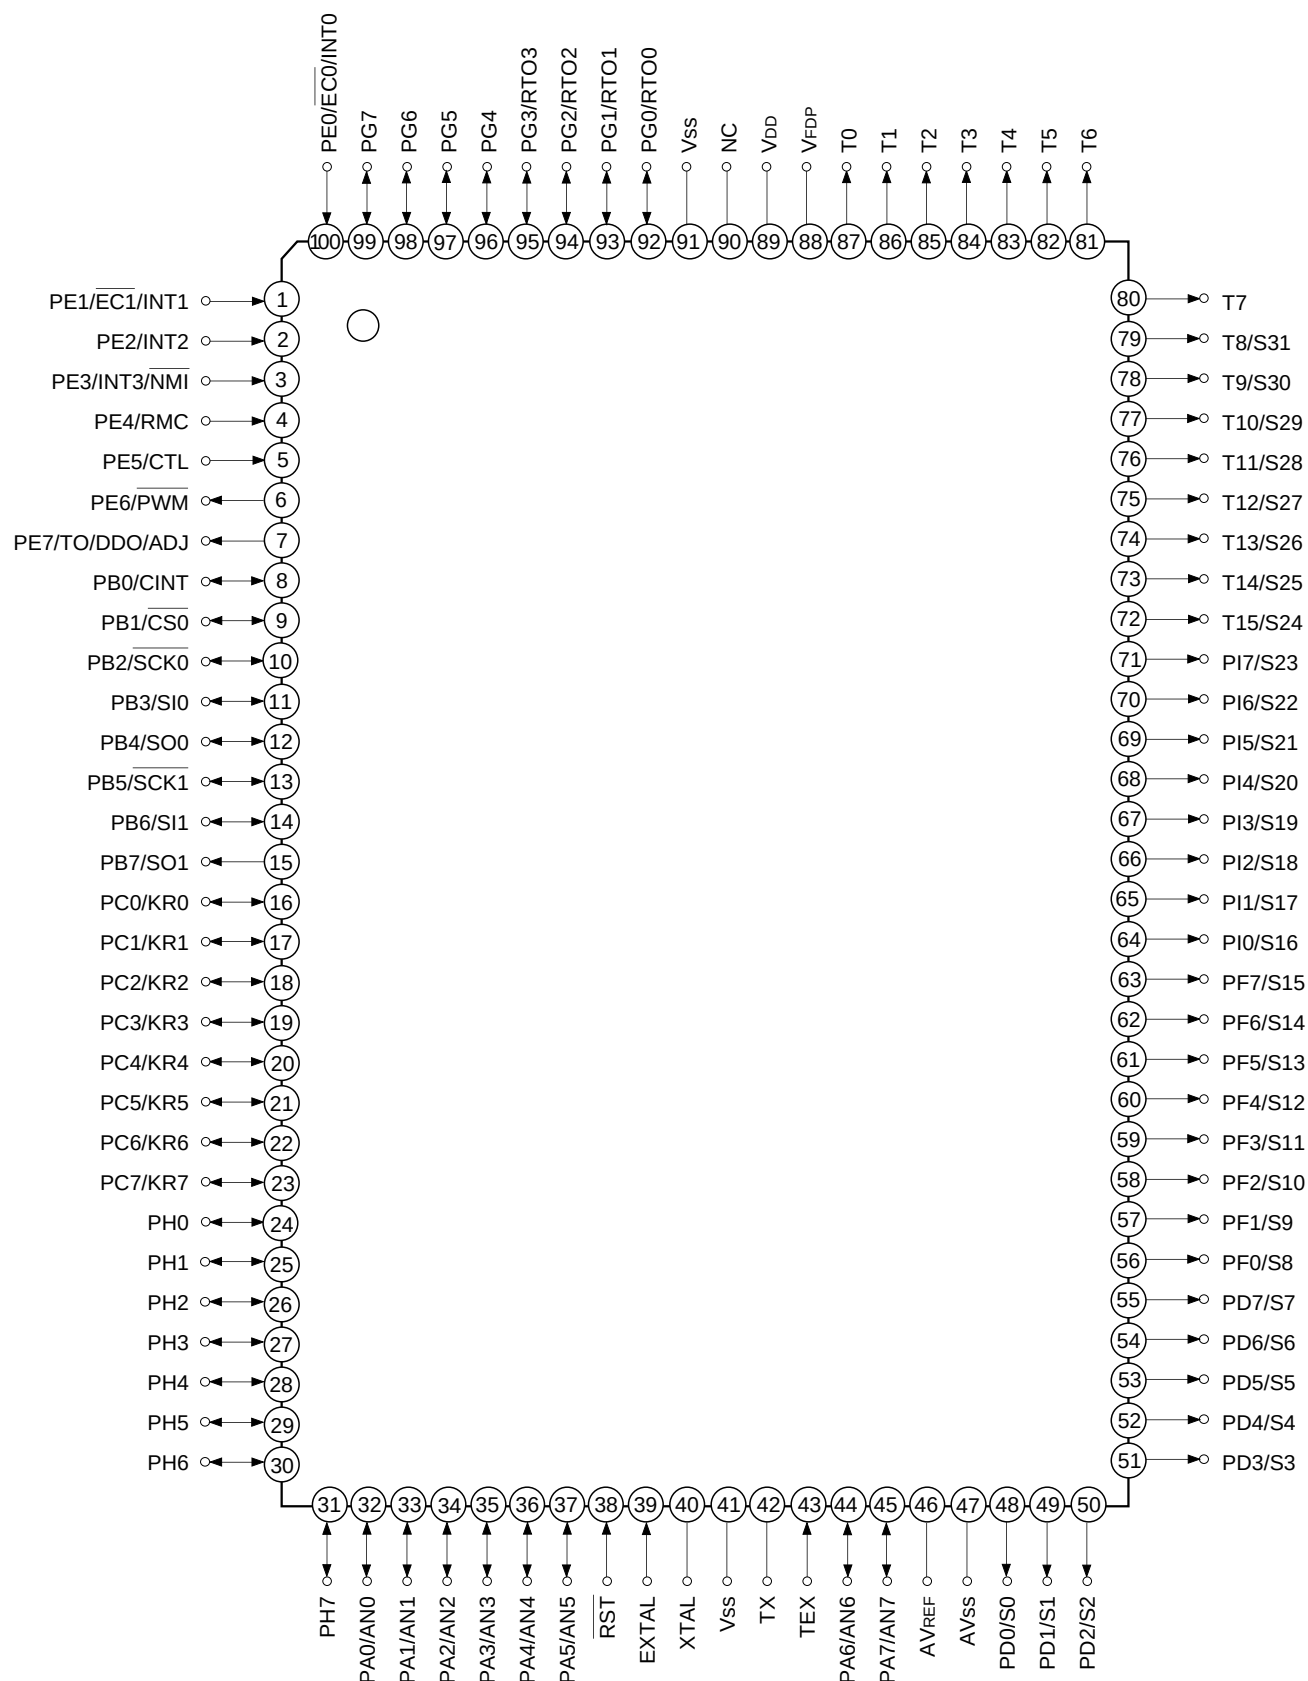

- Note)**
1. NC (Pin 90) must be connected to V_{DD}.
 2. Vss (Pins 41 and 91) must be connected to GND.

Pin Description

Pin code	I/O	Functions		
PA0/AN0 to PA7/AN7	I/O/ Analog input	(Port A) 8-bit I/O port. I/O can be set in single bit units. (8pins)	Analog inputs to A/D converter. (8 pins)	
PB0/CINT	I/O/Input	(Port B) 8-bit I/O port. I/O for lower 7 bits can be set in a unit of single bits. Uppermost bit (PB7) is for output only. (8 pins)	Capture input to 16-bit timer/counter.	
PB1/ $\overline{\text{CS0}}$	I/O/Input		Chip select input for serial interface (CH0).	
PB2/ $\overline{\text{SCK0}}$	I/O/I/O		Serial clock I/O (CH0).	
PB3/SI0	I/O/Input		Serial data input (CH0).	
PB4/SO0	I/O/Output		Serial data output (CH0).	
PB5/ $\overline{\text{SCK1}}$	I/O/I/O		Serial clock I/O (CH1).	
PB6/SI1	I/O/Input		Serial data input (CH1).	
PB7/SO1	Output/Output		Serial data output (CH1).	
PC0/KR0 to PC7/KR7	I/O/Input	(Port C) 8-bit I/O port. I/O can be set in a unit of single bits. Capable of driving 12mA sync current.	Serves as key return inputs when operating key scan with FDP segment signal.	
PD0/S0 to PD7/S7	Output/Output	(Port D) 8-bit output port. (8 pins)	FDP segment signal outputs.	
PE0/INT0/ $\overline{\text{EC0}}$	Input/Input/Input	(Port E) 8-bit port. Lower 6 bits are for inputs; upper 2 bits are for outputs. (8 pins)	Inputs for external interruption request. (4 pins)	External event inputs for timer/counter. (2 pins)
PE1/INT1/ $\overline{\text{EC1}}$	Input/Input/Input			
PE2/INT2	Input/Input		Non-maskable interruption request input.	
PE3/INT3/ NMI	Input/Input/Input			
PE4/RMC	Input/Input		Remote control reception circuit input.	
PE5/CTL	Input/Input		Input for CTL duty direction circuit.	
PE6/ $\overline{\text{PWM}}$	Output/Output		14-bit PWM output.	
PE7/TO/ DDO/ADJ	Output/Output/ Output/Output	Output for the 16-bit timer/counter rectangular waves, CTU duty detection, and 32kHz oscillation frequency demultiplication.		
PF0/S8 to PF7/S15	Output/Output	(Port F) 8-bit output port. (8pins)	FDP segment signal outputs.	
PG0/RTO0 to PG3/RTO3	I/O/Output	(Port G) 8-bit I/O port. I/O can be set in a unit of single bits. Data for the lower 4 bits are gated with the contents of RTO or OR-gate output. (8 pins)	Outputs for real-time pulse generator (RTG). Functions as high-precision, real-time pulse output port. (4 pins)	
PG4 to PG7	I/O			

Pin code	I/O	Functions	
PH0 to PH7	I/O	(Port H) 8-bit I/O port. I/O can be set in a unit of single bits. (8 pins)	
PI0/S16 to PI7/S23	Output/Output	(Port I) 8-bit output ports. (8 pins)	FDP segment signal outputs.
T8/S31 to T15/S24	Output/Output	Outputs for FDP timing (digit) signals/segment signals.	
T0 to T7	Output	FDP timing signal outputs.	
V _{FDP}		FDP voltage supply when incorporated resistor is set by mask option.	
EXTAL	Input	Crystal connectors system clock oscillation. When the clock is supplied externally, input to EXTAL; opposite phase clock should be input to XTAL.	
XTAL	Output		
TEX	Input	Crystal connectors for 32kHz timer/counter clock oscillation. Set 32kHz crystal oscillator between TEX and TX. For usage as event input, attach clock source to TEX, and open TX.	
TX	Output		
$\overline{\text{RST}}$	Input	Low-level active, system reset.	
NC		NC. Under normal operation, connect to V _{DD} .	
AV _{REF}	Input	Reference voltage input for A/D converter.	
AV _{SS}		A/D converter GND.	
V _{DD}		Vcc supply.	
V _{SS}		GND.	

I/O Circuit Format for Pins

Pin	Circuit format	When reset
PA0/AN0 to PA7/AN7 8 pins	Port A	Hi-Z
PB0/CINT PB1/ $\overline{\text{CS0}}$ PB3/SI0 PB6/SI1 4 pins	Port B	Hi-Z
PB2/ $\overline{\text{SCK0}}$ PB5/ $\overline{\text{SCK1}}$ 2 pins	Port B	Hi-Z

Pin	Circuit format	When reset
PB4/SO0 1 pin	Port B	Hi-Z
PB7/SO1 1 pin	Port B	High level
PC0/KR0 to PC7/KR7 8 pins	Port C	Hi-Z
PE0/ $\overline{\text{EC0}}$ /INT0 PE1/ $\overline{\text{EC1}}$ /INT1 PE2/INT2 PE3/INT3/ $\overline{\text{NMI}}$ PE4/RMC PE4/CTL 6 pins	Port E	Hi-Z

Pin	Circuit format		When reset
PE6/PWM 1 pin	Port E	PWM Port E output selection "0" when reset Port E data "1" when reset Data bus RD (Port E)	High level
PE7/TO/ DDO/ADJ 1 pin	Port E	Output enable TO 0 DDO 1 ADJ16K* 2 ADJ2K* 3 MPX Port E output selection "00" when reset Port E output selection "0" when reset Port E data "1" when reset Data bus RD (Port E) * ADJ signal is a frequency demultiplication output for 32kHz oscillation frequency adjustment. ADJ2 can be used for buzzer output.	High level
PC0/RTO0 to PG3/RTO3 4 pins	Port G	RTO data "0" when reset Port G data Port G direction "0" when reset Data bus RD (Port G) IP	Hi-Z
PG4 to PG7 PH0 to PH7 12 pins	Port G Port H	Port G or Port H data Port G or Port H direction "0" when reset Data bus RD (Port G or Port H) IP	Hi-Z

Pin	Circuit format		When reset
PD0/S0 to PD7/S7 PF0/S8 to PF7/S15 PI0/S16 to PI7/S23 24 pins	Port D Port F Port I Segment output data Output selection control signal ("0" when reset) Data for Port D, F, or I "0" when reset Data bus RD (Port D, F, or I) * High voltage drive transistor * Mask option Pull-down resistor VFDP	Hi-Z or Low level (when PD resistance is added)	
T15/S24 to T8/S31 T0 to T7 16 pins	Segment output data Output selection control signal ("0" when reset) * High voltage drive transistor * Mask option Pull-down resistor VFDP	Hi-Z or Low level (when PD resistance is added)	
EXTAL XTAL 2 pins	EXTAL XTAL IP IP • Diagram shows circuit composition during oscillation. • Feedback resistor is removed during stop.	Oscillation	
TEX TX 2 pins	TEX TX IP IP • Diagram shows circuit composition during oscillation. • When the operation of the oscillation circuit is stopped by the software, the feedback resistor is removed, and TEX and TX become "Low" level and "High" level respectively.	Oscillation	
RST 1 pin	Pull-up resistor * Mask option Schmitt input	Low level	

Absolute Maximum Ratings

(V_{SS} = 0V reference)

Item	Symbol	Rating	Unit	Remarks
Supply voltage	V _{DD}	−0.3 to +7.0	V	
	AV _{SS}	−0.3 to +0.3	V	
Input voltage	V _{IN}	−0.3 to +7.0 ^{*1}	V	
Output voltage	V _{OUT}	−0.3 to +7.0 ^{*1}	V	
Display output voltage	V _{OD}	V _{DD} −40 to V _{DD} +0.3	V	As P channel transistor is open drain, V _{DD} is reference.
High level output current	I _{OH}	−5	mA	All pins excluding outputs ^{*2} (value per pin)
	I _{ODH1}	−15	mA	Display outputs S0 to S23 (value per pin)
	I _{ODH2}	−35	mA	Display outputs T0 to T7, and T8/S31 to T15/S24 (value per pin)
High level total output current	ΣI _{OH}	−40	mA	Total for all pins excluding display outputs
	ΣI _{ODH}	−100	mA	Total for all display outputs
Low level output current	I _{OL}	15	mA	Port 1
	I _{OLC}	20	mA	High current Port 1 ^{*3}
Low level total output current	ΣI _{OL}	100	mA	Total for all output pins
Operating temperature	T _{opr}	−20 to +75	°C	
Storage temperature	T _{stg}	−55 to +150	°C	
Allowable power dissipation	P _D	600	mW	

*1) V_{IN} and V_{OUT} must not exceed V_{DD} + 0.3V.

*2) Specifies output current of general-purpose I/O ports.

*3) The high current drive transistor is the N-CH transistor of Port C (PC).

Note) Usage exceeding absolute maximum ratings may permanently impair the LSI. Normal operation should be conducted under the recommended operating conditions. Exceeding these conditions may adversely affect the reliability of the LSI.

Recommended Operating Conditions

(V_{SS} = 0V reference)

Item	Symbol	Min.	Max.	Unit	Remarks
Supply voltage	V _{DD}	4.5	5.5	V	High-speed mode Guaranteed operation range
		3.5	5.5	V	Low-speed mode Guaranteed operation range
		2.7	5.5	V	Guaranteed operation range with TEX clock
		2.5	5.5	V	Guaranteed data hold range during STOP
High level input voltage	V _{IH}	0.7V _{DD}	V _{DD}	V	*1
	V _{IHS}	0.8V _{DD}	V _{DD}	V	Hysteresis input*2
	V _{IHEX}	V _{DD} – 0.4	V _{DD} + 0.3	V	EXTAL *3
Low level input voltage	V _{IL}	0	0.3V _{DD}	V	*1
	V _{ILS}	0	0.2V _{DD}	V	Hysteresis input*2
	V _{ILEX}	–0.3	0.4	V	EXTAL *3
Operating temperature	T _{opr}	–20	+75	°C	

*1) Value for each pin of normal input port (PA, PB4, PC, PG, PH).

*2) Value of the following pins: $\overline{\text{RST}}$, $\overline{\text{CINT}}$, $\overline{\text{CS0}}$, $\overline{\text{SCK0}}$, $\overline{\text{SCK1}}$, SI0, SI1, $\overline{\text{EC0/INT0}}$, $\overline{\text{EC1/INT1}}$, INT2, INT3/ $\overline{\text{NMI}}$, RMC, CTL.

*3) Specifies only during external clock input.

Electrical Characteristics

DC Characteristics

(Ta = -20 to +75°C, Vss = 0V reference)

Item	Symbol	Pins	Conditions	Min.	Typ.	Max.	Unit
High level output current	V _{OH}	PA, PB, PC, PE6, PE7, PG, PH	V _{DD} = 4.5V, I _{OH} = -0.5mA	4.0			V
			V _{DD} = 4.5V, I _{OH} = -1.2mA	3.5			V
Low level output current	V _{OL}	PA, PB, PC, PE6, PE7, PG, PH	V _{DD} = 4.5V, I _{OL} = 1.8mA			0.4	V
			V _{DD} = 4.5V, I _{OL} = 3.6mA			0.6	V
		PC	V _{DD} = 4.5V, I _{OL} = 12.0mA			1.5	V
Input current	I _{IHE}	EXTAL	V _{DD} = 5.5V, V _{IH} = 5.5V	0.5		40	μA
	I _{IIE}		V _{DD} = 5.5V, V _{IL} = 0.4V	-0.5		-40	μA
	I _{IHT}	TEX	V _{DD} = 5.5V, V _{IH} = 5.5V	0.1		10	μA
	I _{ILT}		V _{DD} = 5.5V	-0.1		-10	μA
	I _{ILR}	RST*1	V _{IL} = 0.4V	-1.5		-400	μA
Display output current	I _{OH}	S0 to S23	V _{DD} = 4.5V V _{OH} = V _{DD} - 2.5V	-8			mA
		S24/T15 to S31/T8 T0 to T7		-20			mA
Open drain output leakage current (P-CH Tr off state)	I _{LOL}	S0 to S23 S24/T15 to S31/T8 T0 to T7	V _{DD} = 5.5V V _{OL} = V _{DD} - 35V V _{FDP} = V _{DD} - 35V			-20	μA
Pull-down resistance*2	R _L	S0 to S23 S24/T15 to S31/T8 T0 to T7	V _{DD} = 5V V _{FDP} = V _{DD} - 35V	60	100	270	kΩ
I/O leakage current	I _{Iz}	PA to PC PE, PG, PH, RST*1	V _{DD} = 5.5V V _I = 0, 5.5V			±10	μA

Item	Symbol	Pins	Conditions	Min.	Typ.	Max.	Unit
Power supply current*3	I _{DD1}	V _{DD}	High speed mode operation (1/2 frequency demultiplier clock)		20	40	mA
			V _{DD} = 5.5V, 10MHz crystal oscillation (C ₁ = C ₂ = 15pF)				
	I _{DD2}		V _{DD} = 3V, 32kHz crystal oscillation (C ₁ = C ₂ = 47pF)		35	100	μA
	I _{DDS1}		SLEEP mode		1.2	8	mA
			V _{DD} = 5.5V, 10MHz crystal oscillation (C ₁ = C ₂ = 15pF)				
	I _{DDS2}		V _{DD} = 3V, 32kHz crystal oscillation (C ₁ = C ₂ = 47pF)		9	30	μA
I _{DDS3}	STOP mode V _{DD} = 5.5V, 10MHz crystal oscillation; and termination of 32kHz oscillation			10	μA		
Input capacity	C _{IN}	Pins other than S0 to S31, T0 to T7, PB7, PE6, AV _{REF} , AV _{SS} , V _{FDP} , V _{DD} , V _{SS}	Clock 1MHz 0V for all pins excluding measured pins		10	20	pF

*1) $\overline{\text{RST}}$ specifies the input current when pull-up resistance has been selected; leakage current when no resistance has been selected. PB7 does not specify the leakage current because it's only for output.

*2) When incorporated pull-down resistance has been selected through mask option.

*3) When all pins are open.

AC Characteristics

(1) Clock timing

(Ta = -20 to +75°C, V_{DD} = 4.5 to 5.5V, V_{SS} = 0V reference)

Item	Symbol	Pin	Conditions	Min.	Typ.	Max.	Unit
System clock frequency	f _c	XTAL EXTAL	Fig. 1, Fig. 2	1		10	MHz
System clock input pulse width	t _{XL} t _{XH}	EXTAL	Fig. 1, Fig. 2 External clock drive	37.5			ns
System clock input rise time, fall time	t _{CR} t _{CF}	EXTAL	Fig. 1, Fig. 2 External clock drive			200	ns
Event count input clock pulse width	t _{EH} t _{EL}	$\overline{EC0}$, $\overline{EC1}$	Fig. 3	t _{sys} + 50*			ns
Event count input clock rise time, fall time	t _{ER} t _{EF}	$\overline{EC0}$, $\overline{EC1}$	Fig. 3			20	ms
System clock frequency	f _c	TEX TX	V _{DD} = 2.7 to 5.5V Fig. 2 (32kHz clock application condition)		32.768		kHz
Event count input pulse width	t _{TL} t _{TH}	TEX	Fig. 3	10			μs
Event count input rise time, fall time	t _{TR} t _{TF}	TEX	Fig. 3			20	ms

* t_{sys} indicates the three values below according to the upper two bits (CPU clock selection) of the control clock register (address: 00FE_H).

t_{sys} (ns) = 2000/f_c (upper two bits = "00"), 4000/f_c (upper two bits = "01"), 16000/f_c (upper two bits = "11")

Fig. 1. Clock timing

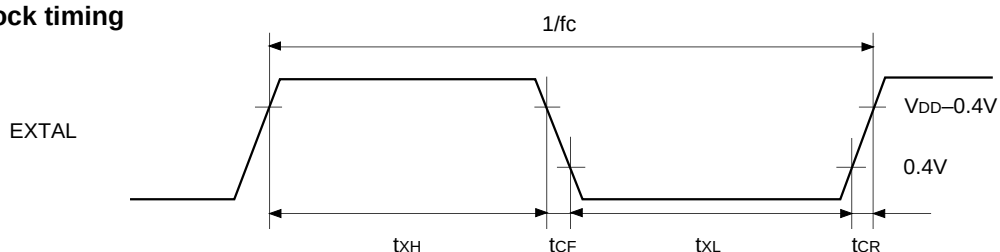


Fig. 2. Clock application conditions


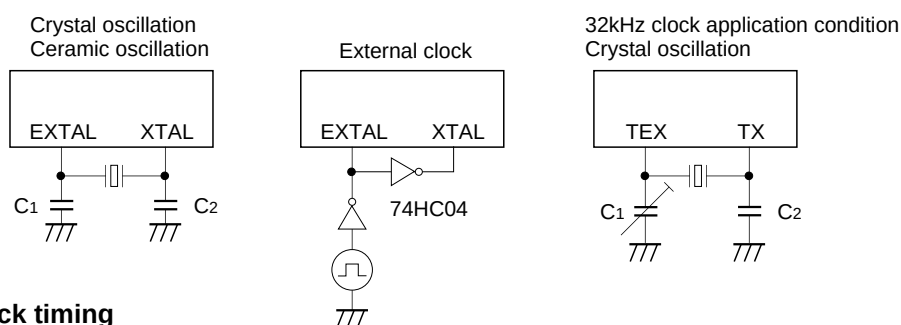


Fig. 3. Event count clock timing

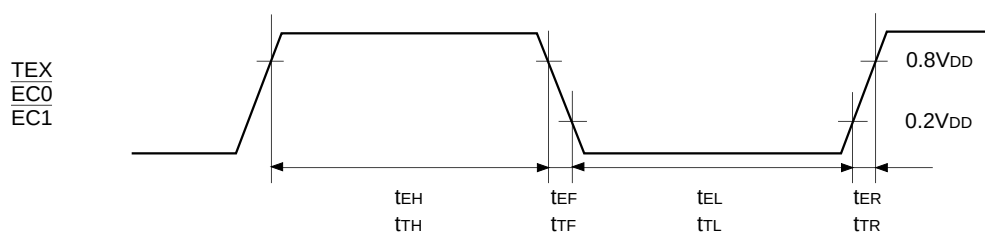

(2) Serial transfer (CH0)

(Ta = -20 to +75°C, V_{DD} = 4.5 to 5.5V, V_{SS} = 0V reference)


Item	Symbol	Pin	Condition	Min.	Max.	Unit
$\overline{\text{CS0}} \downarrow \rightarrow \overline{\text{SCK0}}$ delay time	t_{DCSK}	$\overline{\text{SCK0}}$	Chip select transfer mode ($\overline{\text{SCK0}}$ = output mode)		$t_{\text{sys}} + 200$	ns
$\overline{\text{CS0}} \uparrow \rightarrow \overline{\text{SCK0}}$ float delay time	t_{DCSKF}	$\overline{\text{SCK0}}$	Chip select transfer mode ($\overline{\text{SCK0}}$ = output mode)		$t_{\text{sys}} + 200$	ns
$\overline{\text{CS0}} \downarrow \rightarrow \text{SO0}$ delay time	t_{DCSO}	SO0	Chip select transfer mode		$t_{\text{sys}} + 200$	ns
$\overline{\text{CS0}} \uparrow \rightarrow \text{SO0}$ float delay time	t_{DCSOF}	SO0	Chip select transfer mode		$t_{\text{sys}} + 200$	ns
$\overline{\text{CS0}}$ High level width	t_{WHCS}	$\overline{\text{CS0}}$	Chip select transfer mode	$t_{\text{sys}} + 200$		ns
$\overline{\text{SCK0}}$ cycle time	t_{KCY}	$\overline{\text{SCK0}}$	Input mode	$2t_{\text{sys}} + 200$		ns
			Output mode	$16000/f_c$		ns
$\overline{\text{SCK0}}$ High, Low level width	t_{KH} t_{KL}	$\overline{\text{SCK0}}$	Input mode	$t_{\text{sys}} + 100$		ns
			Output mode	$8000/f_c - 50$		ns
SI0 input set-up time (for $\overline{\text{SCK0}} \uparrow$)	t_{SIK}	SI0	$\overline{\text{SCK0}}$ input mode	100		ns
			$\overline{\text{SCK0}}$ output mode	200		ns
SI0 input hold time (for $\overline{\text{SCK0}} \uparrow$)	t_{KSI}	SI0	$\overline{\text{SCK0}}$ input mode	$t_{\text{sys}} + 200$		ns
			$\overline{\text{SCK0}}$ output mode	100		ns
$\overline{\text{SCK0}} \downarrow \rightarrow \text{SO0}$ delay time	t_{KSO}	SO0	$\overline{\text{SCK0}}$ input mode		$t_{\text{sys}} + 200$	ns
			$\overline{\text{SCK0}}$ output mode		100	ns

Note 1) t_{sys} indicates the three values below according to the upper two bits (CPU clock selection) of the control clock register (address: 00FE_H).

t_{sys} (ns) = 2000/ f_c (upper two bits = "00"), 4000/ f_c (upper two bits = "01"), 16000/ f_c (upper two bits = "11")


Note 2) The load condition for the $\overline{\text{SCK0}}$ output mode, SO0 output delay time is 50pF + 1TTL.

Fig. 4. Serial transfer CH0 timing

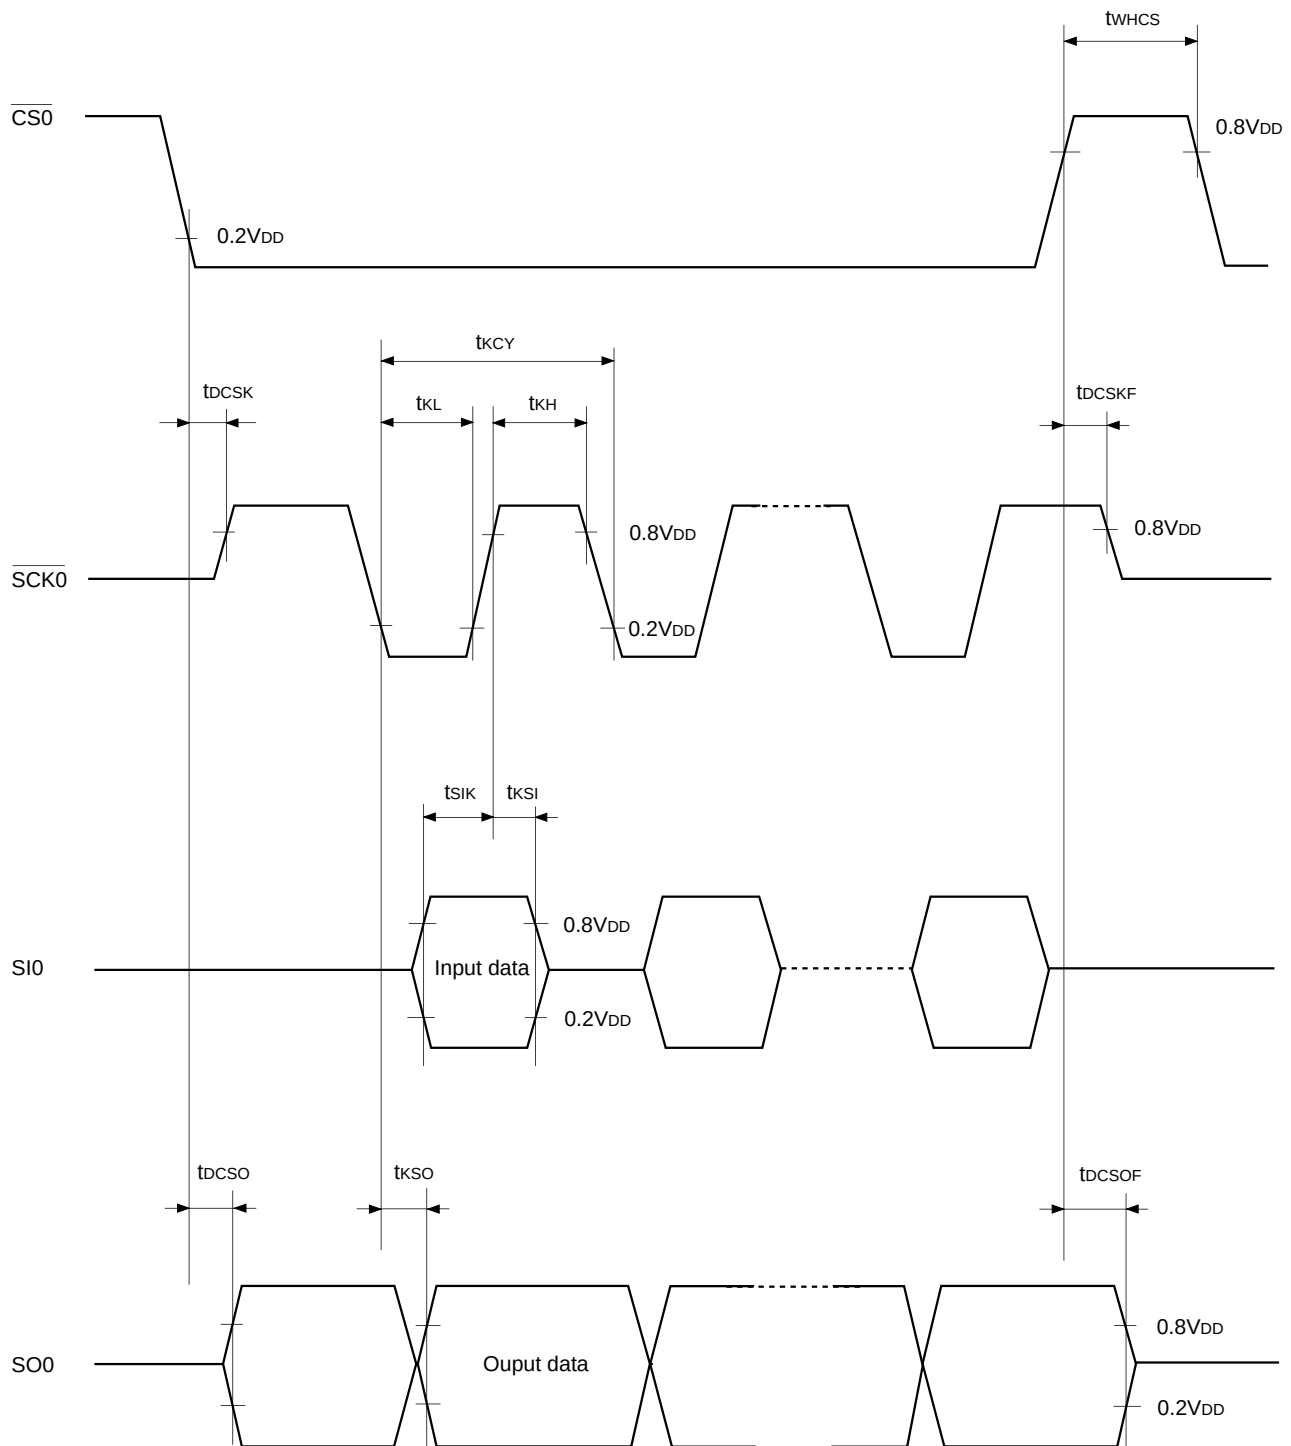


Serial transfer (CH1)(Ta = -20 to +75°C, V_{DD} = 4.5 to 5.5V, V_{SS} = 0V reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
$\overline{\text{SCK1}}$ cycle time	t_{KCY}	$\overline{\text{SCK1}}$	Input mode	1000		ns
			Ouput mode	16000/fc		ns
$\overline{\text{SCK1}}$ High, Low level width	t_{KH} t_{KL}	$\overline{\text{SCK1}}$	Input mode	400		ns
			Ouput mode	8000/fc-50		ns
SI1 input set-up time (for $\overline{\text{SCK1}} \uparrow$)	t_{SIK}	SI1	$\overline{\text{SCK1}}$ input mode	100		ns
			$\overline{\text{SCK1}}$ ouput mode	200		ns
SI1 input hold time (for $\overline{\text{SCK1}} \uparrow$)	t_{KSI}	SI1	$\overline{\text{SCK1}}$ input mode	200		ns
			$\overline{\text{SCK1}}$ ouput mode	100		ns
$\overline{\text{SCK1}} \downarrow \rightarrow \text{SO1}$ delay time	t_{KSO}	SO1	$\overline{\text{SCK1}}$ input mode		200	ns
			$\overline{\text{SCK1}}$ ouput mode		100	ns

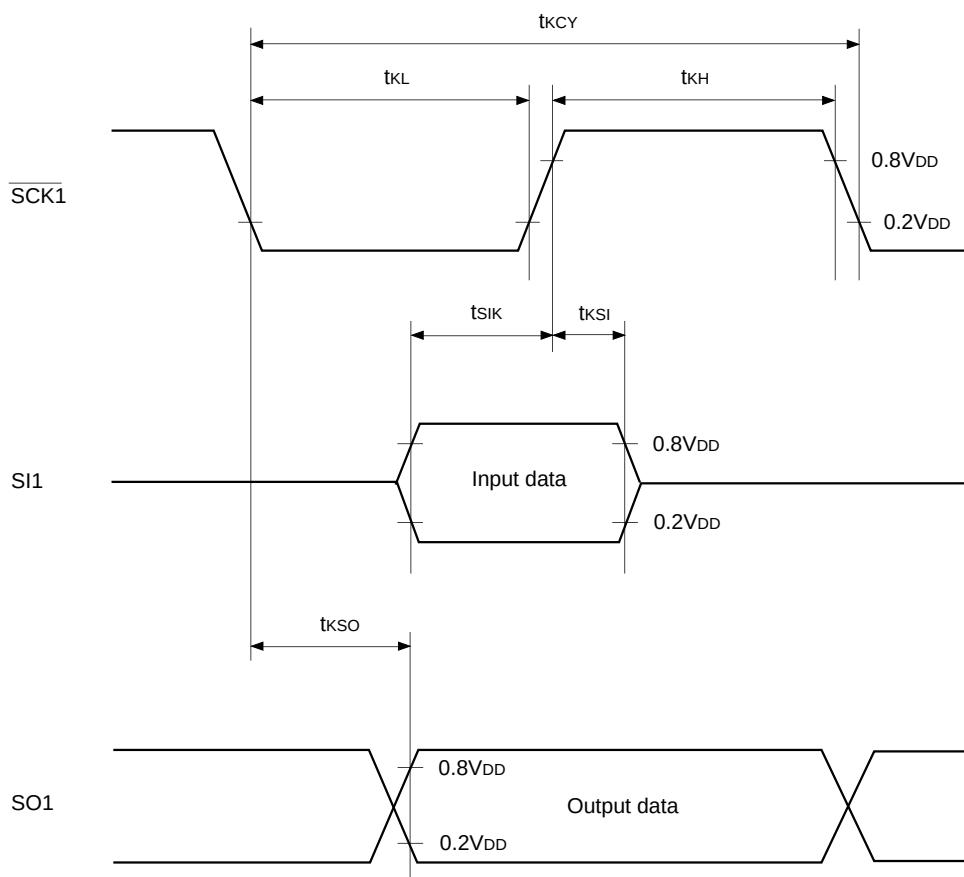Note) The load condition for the $\overline{\text{SCK1}}$ output mode, SO1 output delay time is 50pF + 1TTL.**Fig. 5. Serial transfer CH1 timing**

(3) A/D converter characteristics(Ta = -20 to +75°C, V_{DD} = 4.5 to 5.5V, AV_{REF} = 4.0 to AV_{DD}, V_{SS} = AV_{SS} = 0V reference)

Item	Symbol	Pin	Condition	Min.	Typ.	Max.	Unit
Resolution						8	Bits
Linearity error			Ta = 25°C V _{DD} = 5.0V V _{SS} = AV _{SS} = 0V			±3	LSB
Zero transition voltage	V _{ZT} *1			-10	10	70	mV
Full-scale transition voltage	V _{FT} *2			4910	4970	5030	mV
Conversion time	t _{CONV}			160/f _{ADC} *3			μs
Sampling time	t _{SAMP}			12/f _{ADC} *3			μs
Reference input voltage	V _{REF}	AV _{REF}		V _{DD} - 0.5		V _{DD}	V
Analog input voltage	V _{IAN}	AN0 to AN7		0		AV _{REF}	V
AV _{REF} current	I _{REF}	AV _{REF}	Operation mode		0.6	1.0	mA
	I _{REFS}		SLEEP mode STOP mode 32kHz operation mode			10	μA

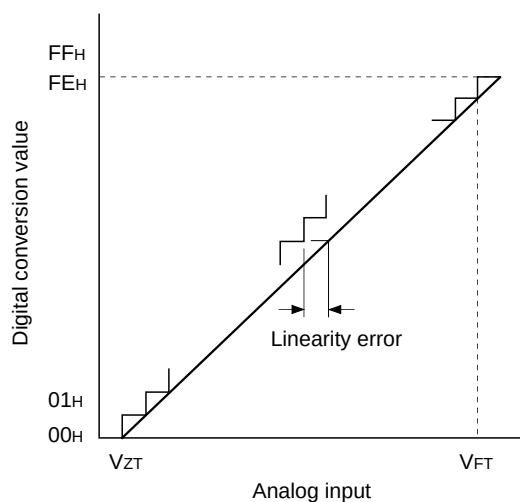Fig. 6. Definition of A/D converter terms

*1) V_{ZT}: Value at which the digital transfer value changes from 00_H to 01_H and vice versa.

*2) V_{FT}: Value at which the digital transfer value changes from FE_H to FF_H and vice versa.



*3) f_{ADC} indicates the below values due to ADC operation clock selection (ADCS: Bit 6 of address 00F9_H).

During PS2 selection, f_{ADC} = f_c/2


During PS1 selection, f_{ADC} = f_c

(4) Interruption, reset input ($T_a = -20$ to $+75^\circ\text{C}$, $V_{DD} = 4.5$ to 5.5V , $V_{SS} = 0\text{V}$ reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
External interruption High, Low level width	t_{IH} t_{IL}	INT0 INT1 INT2 $\overline{\text{NMI/INT3}}$		1		μs
Reset input Low level width	t_{RSL}	$\overline{\text{RST}}$		$32/f_c$		μs

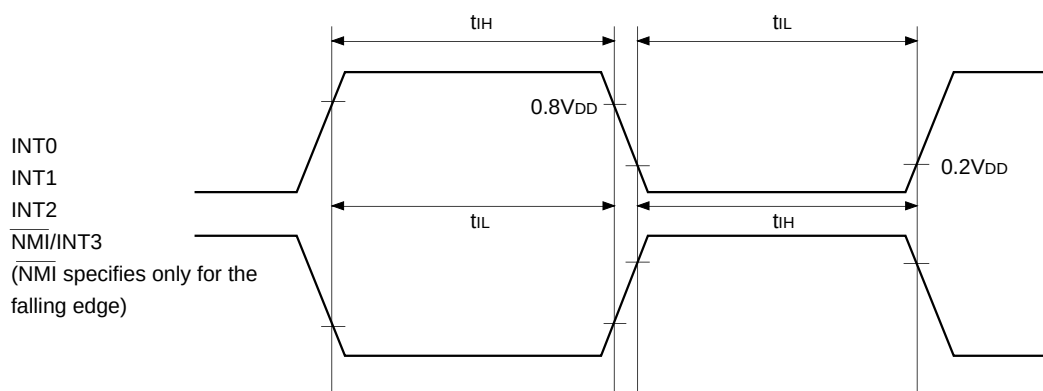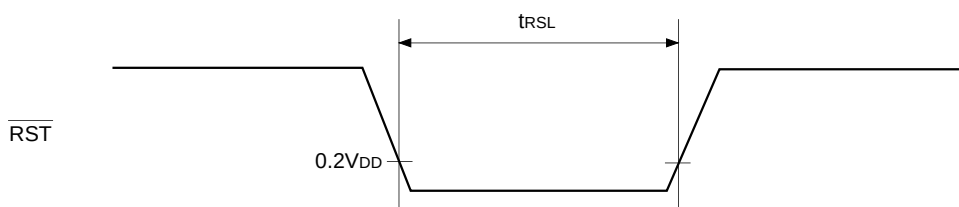
Fig. 7. Interruption input timing**Fig. 8. $\overline{\text{RST}}$ input timing****(5) Others**($T_a = -20$ to $+75^\circ\text{C}$, $V_{DD} = 4.5$ to 5.5V , $V_{SS} = 0\text{V}$ reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
CLK input High, Low level width	t_{CTH} t_{CTL}	CTL	$t_{sys} = 2000/f_c$	$t_{sys} + 200$		ns

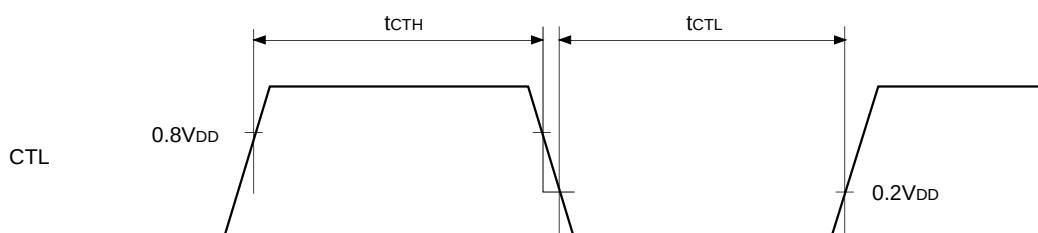Fig. 9. Other timing

Appendix

Fig. 10. Recommended oscillation circuit

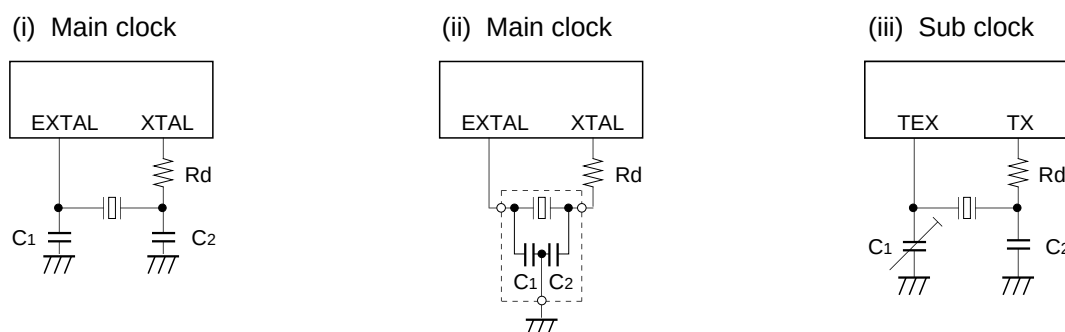

Manufacturer	Model	fc (MHz)	C ₁ (pF)	C ₂ (pF)	Rd (Ω)	Circuit example	
MURATA MFG CO., LTD.	CSA4.19MG	4.19	30	30	0	(i)	
	CSA8.00MTZ	8.00					
	CSA10.0MTZ	10.00					
	CST4.19MGW*	4.19				(ii)	
	CST8.00MTW*	8.00					
	CST10.0MTW*	10.00					
RIVER ELETEC CO., LTD	HC-49/U03	4.19	12	12	0	(i)	
		8.00					
		10.00					
KINSEKI LTD.	HC-49/U (-S)	4.19	27	27	0		(iii)
		8.00					
		10.00	20	20			
	P3	32.768kHz	50	22	1M		

Those marked with an asterisk (*) signify types with built-in ground capacitance (C1, C2).

Mask option table

Item	Content	
Reset pin pull-up resistance	Non-existent	Existent
High voltage drive output port pull-down resistance	Non-existent	Existent

Unit: mm

Technical drawing of a rectangular component with dimensions and a detail view.

Top View Dimensions:

- Overall width: 23.9 ± 0.4
- Inner width: $20.0 - 0.1$
- Overall height: 17.9 ± 0.4
- Inner height: $14.0 - 0.01$
- Radius: $R0.4$
- Pin pitch: 0.65

Feature Callouts:

- $\text{M} \pm 0.12$ (Metric thread)
- 0.15 (Parallelism)

Side View Dimensions:

- Overall height: 15.8 ± 0.4
- Pin pitch: $0.15 - 0.05$
- Radius: $R0.1$

Detail A:

- Angle: $0^\circ \text{ to } 15^\circ$
- Height: 0.8 ± 0.2
- Radius: $R16.3$

SONY CODE	QFP-100P-L01
EIAJ CODE	*QFP100-P-1420-A
JEDEC CODE	_____

PACKAGE MATERIAL	EPOXY RESIN
LEAD TREATMENT	SOLDER PLATING
LEAD MATERIAL	COPPER / 42 ALLOY
PACKAGE WEIGHT	1.4g