


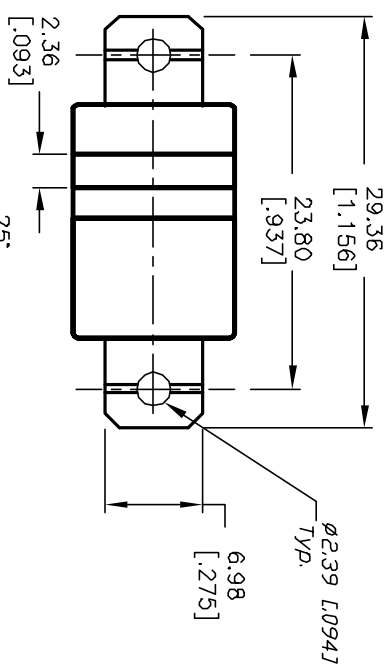


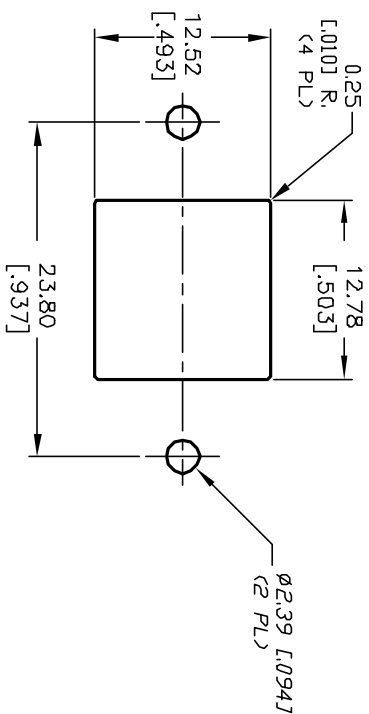


RECOMMENDED PANEL MOUNTING



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
DN	NONE	DN
2-3,5-6	OPEN	2-1,5-4

1. ALL DIMENSIONS IN MM [INCH]
X.XX=±0.4
2. GENERAL TOLERANCE: X.XX=±0.4
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M Ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sec level
10. OPERATING TEMP.: -30°C to 85°C

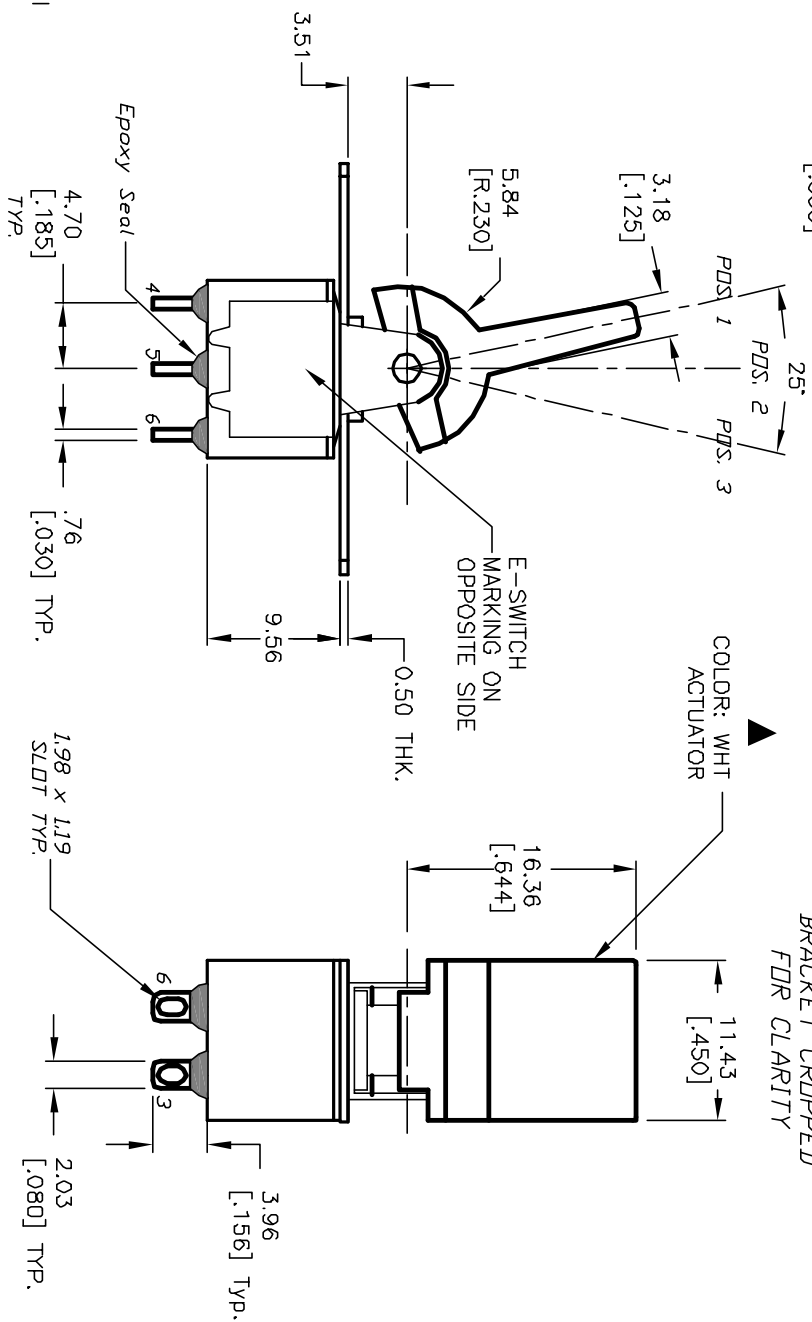

BOTTOM VIEW
BRACKET CROPPED
FOR CLARITY



			TITLE			
A	12458	RELEASED FOR PRODUCTION	10/02/02	CJB	300 DP-1 R16 (WHT) M1 Q E	
REV.	ECN No.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						
			SCALE	DATE	DR	REV
			2:1	10/2/02	CJB	A
					DWG	
					T321057	