

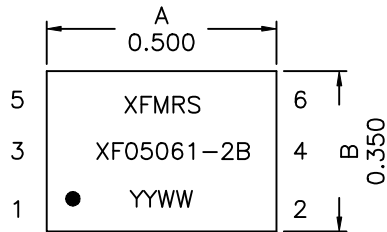



### 1. Dimensions:

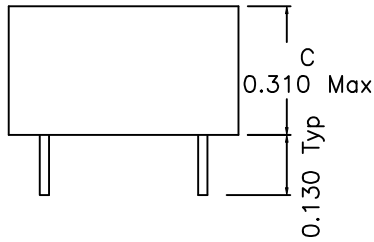

BOTTOM VIEW

Leads are 22AWG solderable.

### 2. Schematic:



### 3. Electrical Specifications: @25°C

Turns Ratio: 1:4CT±2% (PRI:SEC)

Pri OCL: 150 uH Min. @100KHz 0.1V

Pri LL: 0.30 uH Max. @ 100KHz 0.1V Short Sec.

Isolation Voltage: 1500 Vrms

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV. A/1

<b>XFMRS Inc</b>	Title: T3/DS3/E3/STS-1 TRANSFORMERS		
	UNLESS OTHERWISE SPECIFIED	P/N: XF05061-2B	REV. A
	TOLERANCES: .xxx ±0.010	DWN. 李小锋	May-04-01
	Dimensions in Inch	CHK. 廖玉坤	May-04-01
SCALE 1.5:1 SHT 1 OF 1	APP. BW	May-04-01	