
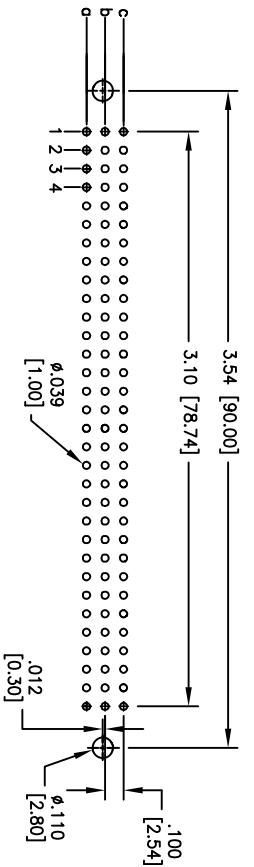

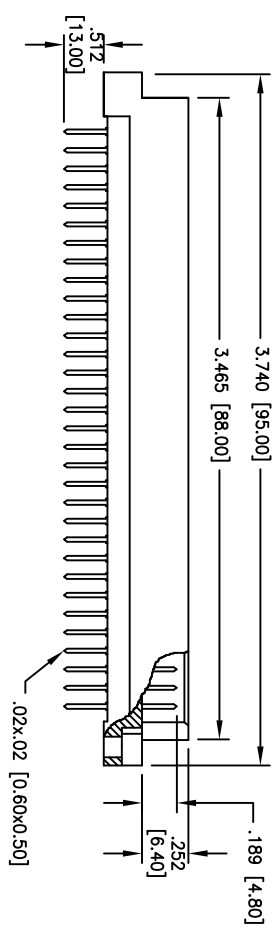


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/17/10	

APPROVED: _____
 DATE: _____ TITLE: _____

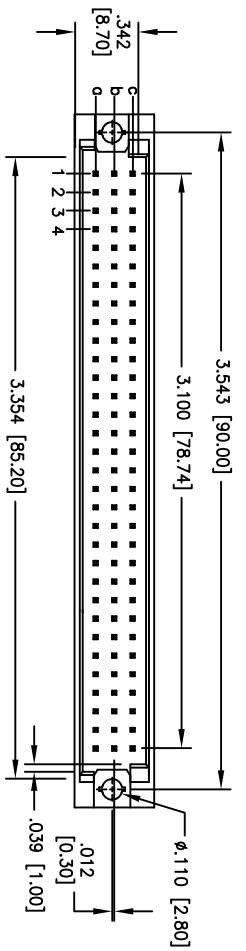

RECOMMENDED PCB LAYOUT

"X"	PLATING
C1	30 u" Gold
C2	15 u" Gold
C3	Gold Flash

SPECIFICATIONS:

Material: PBT, glass reinforced, rated UL 94V-0
 Insulator: Copper Alloy
 Plating: Gold over Nickel underplate on contact area, Tin over Copper underplate on solder tails.
 (See chart for thickness)
 Electrical:
 Current rating: 2 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +125°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN 41612, 96P MALE STRAIGHT PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .010
ØX	± .10
ØXX	± .015
ØXXX	± .010
APPROVALS	DATE
DRAWN AY	12/17/10
CHECKED AW	12/17/10
APPROVED	

SIZE	PART NO.	TITLE
X	DIN-96MS-L33-A2CX	DIN 41612, 96P MALE STRAIGHT PCB MOUNT

REF.	SCALE:	NTS	SHEET	1 OF 1
S00038T	NTS		1	1