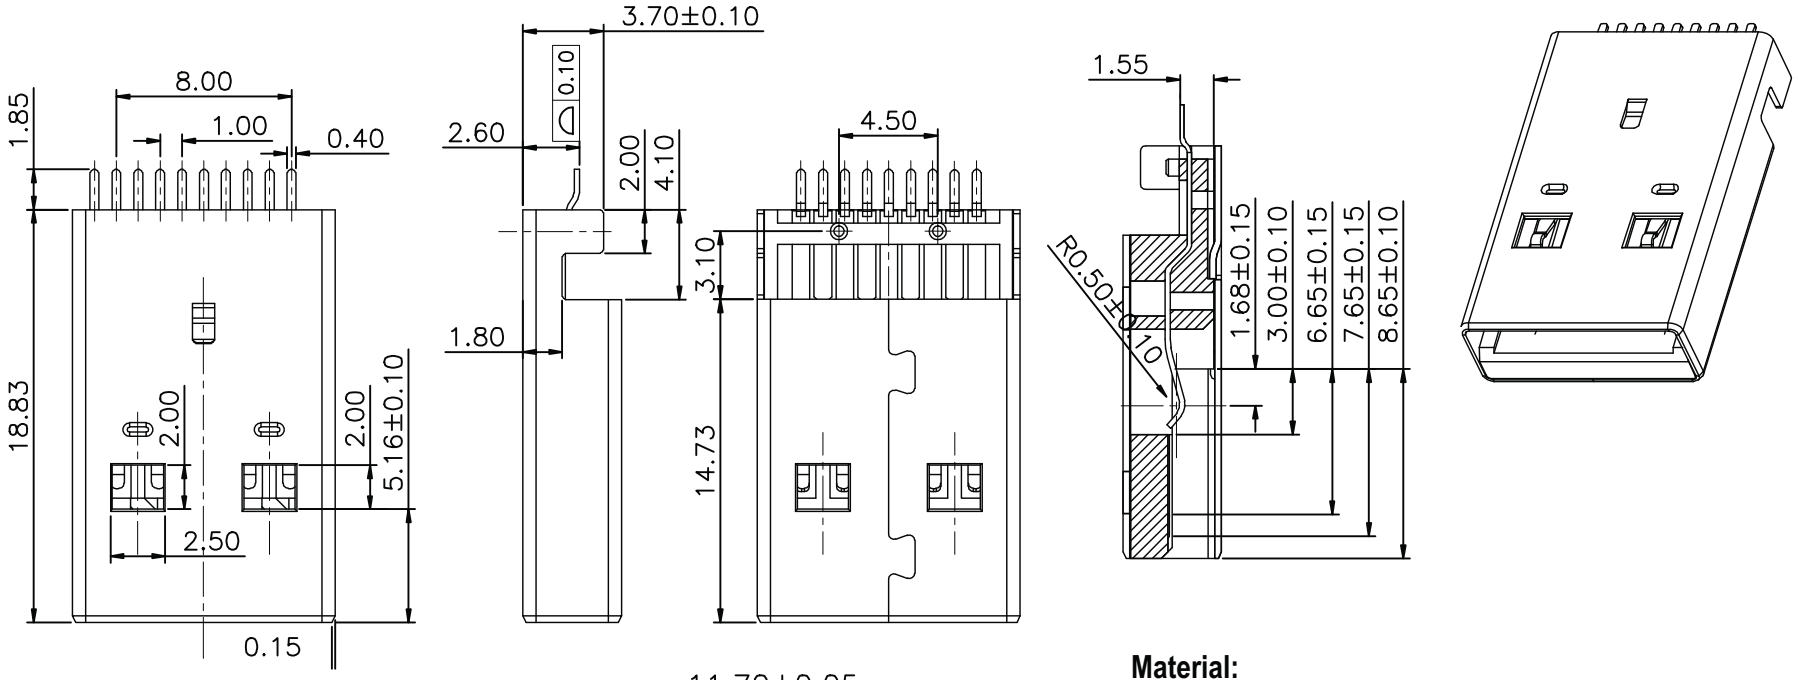

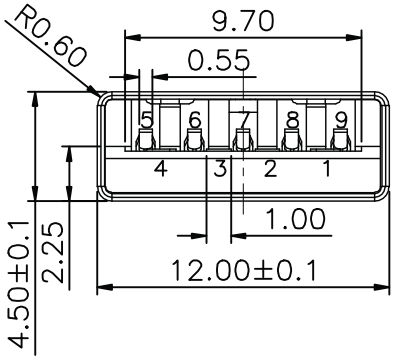

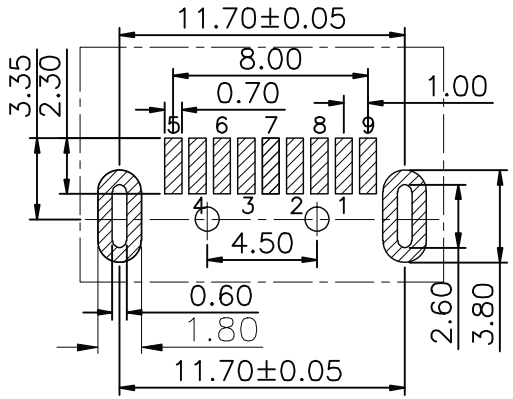

Material:

- Housing: LCP UL94V-0
- Shell: SPCC T=0.3MM
- Contact: Brass T=0.2MM

Electrical:

- Voltage Current Rating: 1.5A 30V DC
- Insulation Resistance: 1,000MΩ Min.
- Contact Resistance Terminal: 30MΩ Max.
- Withstanding Voltage: 500V AC
- Mating Force: 3.57kg Max.
- Unmating Force: 1.02kg Min.

Unit: MM±0.25MM

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

ASSMANN WSW components

Item No. **A-USB/3-A-LP/SMT-R**

Title USB Connector 3.0 - SMT Low Profile, A Male Type, 15µ", for PCB Mount

Drawing No. **rev00**

Replace | Sheet