


SERIES 901 SWITCHES

TACT SWITCHES SMT



E-SWITCH®

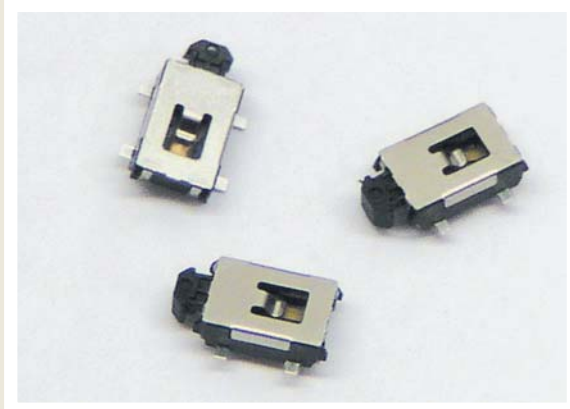

SPECIFICATIONS

| | |
|------------------------|----------------------|
| Contact Rating: | 12 VDC, 50mA |
| Life Expectancy: | 50,000 cycles |
| Contact Resistance: | 100mΩ max. (initial) |
| Insulation Resistance: | 100MΩ min. @ 100 VDC |
| Dielectric Strength: | 250 VAC |
| Actuator Force: | 180 ± 50 gf min. |
| Operating Temperature: | -20°C to +70°C |
| Travel: | 0.30 ± 0.1mm |


FEATURES & BENEFITS

- ▶ Right Angle SMT
- ▶ Unique design allows PC board edge mounting
- ▶ Subminiature package size

APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals

HOW TO ORDER

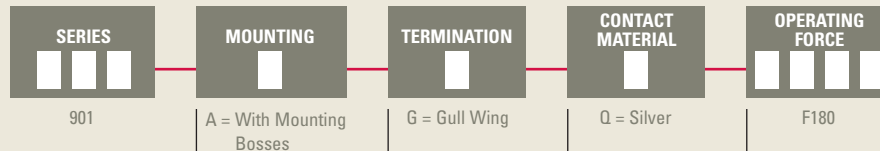

Example Ordering Number

901-A-G-Q-F180

Specifications subject to change without notice.

901

