


# Ultra High Precision Foil Wraparound Surface Mount Chip Resistor with Temperature Coefficient of Resistance of $\pm 0.05 \text{ ppm}/^\circ\text{C}$ , Load Life Stability to $\pm 0.005 \%$ (50 ppm) and ESD Immunity up to 25 kV



Top View

Vishay Foil resistors are not restricted to standard values, we can supply specific "as required" values at no extra cost or delivery (e.g. 1K234 vs. 1K).

## INTRODUCTION

VSMP series is the industry's first device to provide high rated power, excellent load life stability along with extremely low TCR all in one resistor.

One of the most important parameters influencing stability is the temperature coefficient of resistance (TCR). Although the TCR of foil resistors is considered extremely low, this characteristic has been further refined over the years. The VSMP series utilizes ultra high precision Bulk Metal® Z-foil. The Z-foil technology provides a significant reduction of the resistive element's sensitivity to ambient temperature variations (TCR) and to self heating when power is applied (power coefficient). Along with the inherently low PCR and TCR, Z-foil technology also provides remarkably improved load life stability, low noise and availability of tight tolerance.

The VSMP0603 has a full wraparound termination which ensures safe handling during the manufacturing process, as well as providing stability during multiple thermal cyclings.

Our application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us using the e-mail address in the footer below.

**TABLE 1 - TOLERANCE AND TCR VS. RESISTANCE VALUE (1)**  
(- 55 °C to + 125 °C, + 25 °C ref.)

| RESISTANCE VALUE (Ω) | TOLERANCE (%) | TYPICAL TCR AND MAX. SPREAD (ppm/°C) |
|----------------------|---------------|--------------------------------------|
| 250 to 5K            | $\pm 0.01$    | $\pm 0.2 \pm 1.8$                    |
| 100 to < 250         | $\pm 0.02$    | $\pm 0.2 \pm 1.8$                    |

### Note

(1) For tighter performances, please contact Vishay application engineering using the e-mail address in the footer below.

## FEATURES

- Temperature coefficient of resistance (TCR):  
0.05 ppm/°C typical (0 °C to + 60 °C)  
0.2 ppm/°C typical (- 55 °C to + 125 °C, + 25 °C ref.)
- Tolerance: to  $\pm 0.01 \%$
- Power coefficient "ΔR due to self heating":  
5 ppm at rated power
- Power rating: to 100 mW at + 70 °C
- Load life stability: to  $\pm 0.005 \%$  at 70 °C, 2000 h at rated power
- Resistance range: 100 Ω to 5 kΩ
- Electrostatic discharge (ESD) up to 25 000 V
- Short time overload:  $\leq 0.005 \%$
- Non inductive, non capacitive design
- Rise time: 1 ns effectively no ringing
- **Special design which reduces circuit signal distortion**
- Current noise: - 40 dB
- Voltage coefficient < 0.1 ppm/V
- Non inductive: < 0.08 μH
- Non hot spot design
- Terminal finishes available: lead (Pb)-free tin/lead alloy
- Matched sets are available on request
- Prototype samples available from 72 h. For more information, please contact [foil@vishaypg.com](mailto:foil@vishaypg.com)
- For better performances please contact us




**RoHS\***  
COMPLIANT



## APPLICATIONS

- Automatic test equipment (ATE)
- High precision instrumentation
- Laboratory, industrial and medical
- Audio
- EB applications (electron beam scanning and recording equipment, electron microscopes)
- Down hole instrumentation
- Communication

**FIGURE 1 - POWER DERATING CURVE**

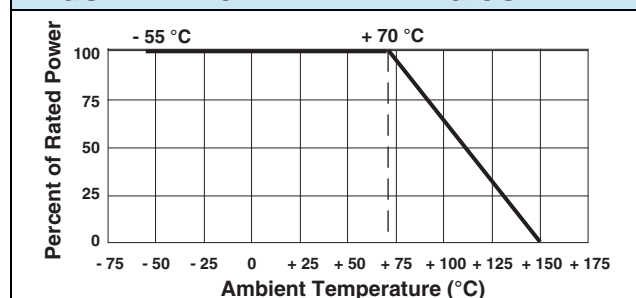


\* Pb containing terminations are not RoHS compliant, exemptions may apply

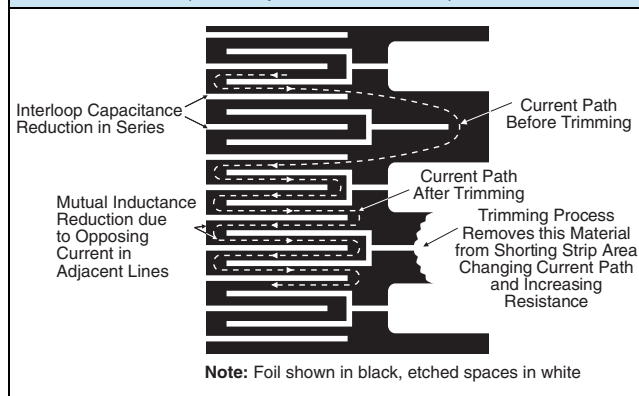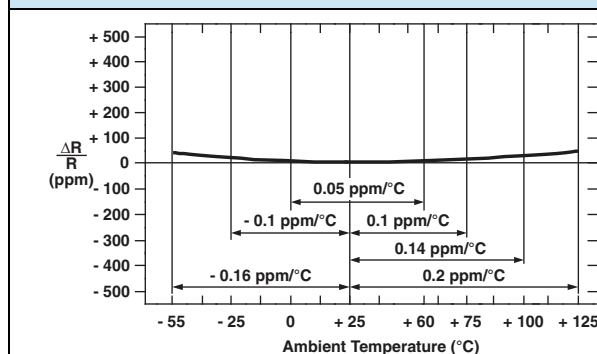**FIGURE 2 - TRIMMING TO VALUES**  
 (Conceptual Illustration)

**FIGURE 3 - TYPICAL TCR CURVE Z-FOIL**
**Note**

- The TCR values for  $< 100 \Omega$  are influenced by the termination composition and result in deviation from this curve.

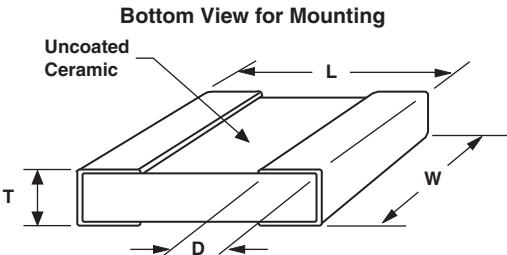**TABLE 2 - DIMENSIONS AND LAND PATTERN** in Inches (Millimeters)

|  |                   |                   |                   |                   |
|-------------------------------------------------------------------------------------|-------------------|-------------------|-------------------|-------------------|
| CHIP SIZE                                                                           | $\pm L$<br>(0.13) | $\pm W$<br>(0.13) | THICKNESS MAXIMUM | $\pm D$<br>(0.13) |
| 0603                                                                                | 0.063 (1.60)      | 0.032 (0.81)      | 0.025 (0.64)      | 0.011 (0.28)      |

**Note**

- Land pattern dimensions are per IPC-782.


**TABLE 3 - PERFORMANCES**

| TEST OR CONDITIONS<br>PER MIL-PRF-55342                   | MIL-PRF-55342<br>CHARACTERISTIC $\Delta R$ LIMITS | TYPICAL $\Delta R$ LIMITS | MAXIMUM $\Delta R$ LIMITS |
|-----------------------------------------------------------|---------------------------------------------------|---------------------------|---------------------------|
| Thermal shock:<br>100 x (-65 °C to +150 °C)               | $\pm 0.2 \%$                                      | $\pm 0.005 \%$ (50 ppm)   | $\pm 0.01 \%$ (100 ppm)   |
| Low temperature operation:<br>-65 °C, 45 min, rated power | $\pm 0.1 \%$                                      | $\pm 0.005 \%$ (50 ppm)   | $\pm 0.01 \%$ (100 ppm)   |
| Short time overload:<br>6.25 x rated power, 5 s           | $\pm 0.1 \%$                                      | $\pm 0.005 \%$ (50 ppm)   | $\pm 0.01 \%$ (100 ppm)   |
| High temperature exposure: 100 h, 150 °C                  | $\pm 0.1 \%$                                      | $\pm 0.01 \%$ (100 ppm)   | $\pm 0.03 \%$ (300 ppm)   |
| Resistance to soldering heat                              | $\pm 0.2 \%$                                      | $\pm 0.005 \%$ (50 ppm)   | $\pm 0.02 \%$ (200 ppm)   |
| Moisture resistance                                       | $\pm 0.2 \%$                                      | $\pm 0.03 \%$ (300 ppm)   | $\pm 0.1 \%$ (1000 ppm)   |
| Load life stability +70 °C for 2000 h<br>at rated power   | $\pm 0.5 \%$                                      | $\pm 0.005 \%$ (50 ppm)   | $\pm 0.01 \%$ (100 ppm)   |


**Note**

- As shown +0.01  $\Omega$  to allow for measurement errors at low values.


**FIGURE 4 - VSMP0603 100 CYCLE THERMAL SHOCK - 65 °C TO 150 °C, 10 UNITS EACH VALUE**

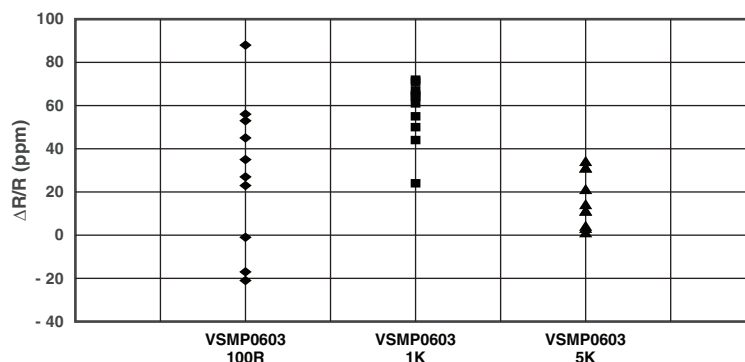

**FIGURE 5 - LOAD LIFE STABILITY 2000 h AT + 70 °C, 0.1 W, 20 UNITS EACH VALUE**

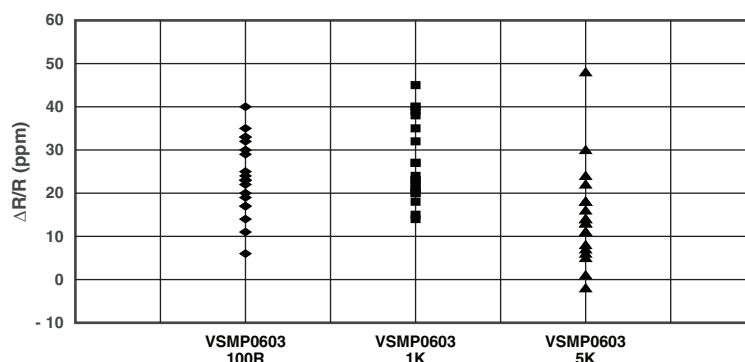

**FIGURE 6 - RECOMMENDED MOUNTING**

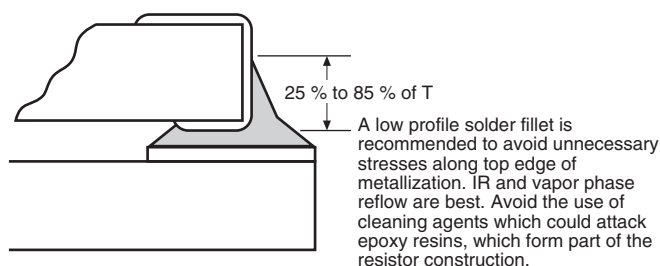


**Notes**

- (1) Avoid the use of cleaning agents which could attack epoxy resins, which form part of the resistor construction
- (2) Vacuum pick up is recommended for handling
- (3) Soldering iron may damage the resistor

**TABLE 4 - GLOBAL PART NUMBER INFORMATION**

NEW GLOBAL PART NUMBER: Y16363K25200T9R (preferred part number format)

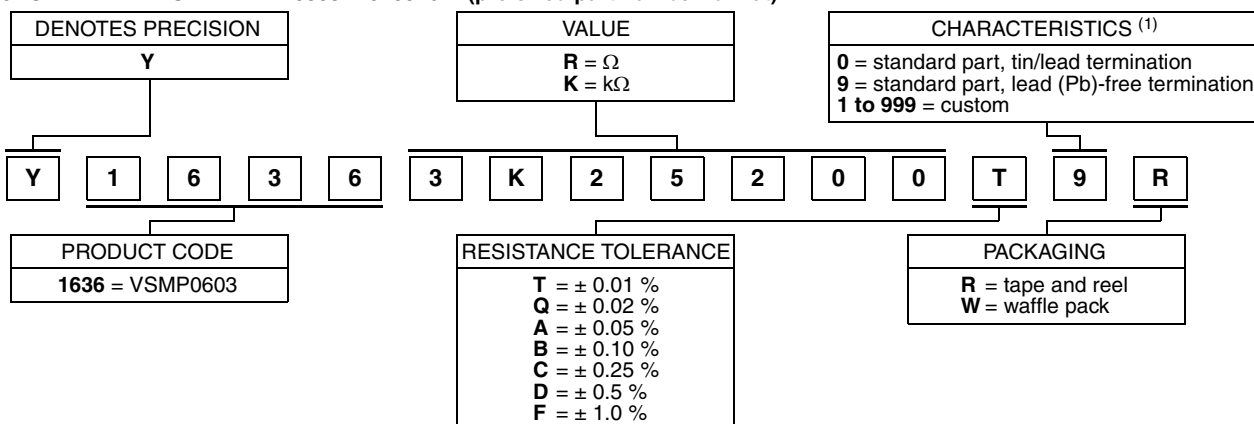

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1636 3K25200 T 9 R:

TYPE: VSMP0603  
 VALUES: 3.252  $k\Omega$   
 ABSOLUTE TOLERANCE: 0.01 %  
 TERMINATION: lead (Pb)-free  
 PACKAGING: tape and reel

**Note**<sup>(1)</sup> For non-standard requests, please contact application engineering.

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.