

## Octal transceiver/register, inverting (3-State)

74ABT651

## FEATURES

- Independent registers for A and B buses
- The 74ABT651 is the inverting version of the 74ABT652
- Multiplexed real-time and stored data
- 3-State outputs
- Live insertion/extraction permitted.
- Power-up 3-State
- Power-up reset
- Output capability: +64mA/−32mA
- Latch-up protection exceeds 500mA per Jedec Std 17
- ESD protection exceeds 2000 V per MIL STD 883 Method 3015 and 200 V per Machine Model

## DESCRIPTION

The 74ABT651 high-performance BiCMOS device combines low static and dynamic power dissipation with high speed and high output drive.

The 74ABT651 transceiver/register consists of bus transceiver circuits with 3-State outputs, D-type flip-flops, and control circuitry arranged for multiplexed transmission of data directly from the input bus or the internal registers. Data on the A or B bus will be clocked into the registers as the appropriate clock pin goes High. Output Enable (OEAB,  $\overline{\text{OEBA}}$ ) and Select (SAB, SBA) pins are provided for bus management.

The following examples demonstrate the four fundamental bus-management functions that can be performed with the 74ABT651.

The select pins determine whether data is stored or transferred through the device in real time.

The output enable pins determine the direction of the data flow.


## QUICK REFERENCE DATA

| SYMBOL                               | PARAMETER                                     | CONDITIONS<br>$T_{\text{amb}} = 25^{\circ}\text{C}$ ; GND = 0V | TYPICAL    | UNIT          |
|--------------------------------------|-----------------------------------------------|----------------------------------------------------------------|------------|---------------|
| $t_{\text{PLH}}$<br>$t_{\text{PHL}}$ | Propagation delay<br>CPBA to An or CPAB to Bn | $C_L = 50\text{pF}$ ; $V_{\text{CC}} = 5\text{V}$              | 3.8<br>4.4 | ns            |
| $C_{\text{IN}}$                      | Input capacitance                             | $V_i = 0\text{V}$ or $V_{\text{CC}}$                           | 4          | pF            |
| $C_{\text{I/O}}$                     | I/O capacitance                               | Outputs disabled; $V_O = 0\text{V}$ or $V_{\text{CC}}$         | 7          | pF            |
| $I_{\text{CCZ}}$                     | Total supply current                          | Outputs disabled; $V_{\text{CC}} = 5.5\text{V}$                | 110        | $\mu\text{A}$ |

## ORDERING INFORMATION

| PACKAGES                    | TEMPERATURE RANGE | OUTSIDE NORTH AMERICA | NORTH AMERICA | DWG NUMBER |
|-----------------------------|-------------------|-----------------------|---------------|------------|
| 24-Pin Plastic DIP          | −40°C to +85°C    | 74ABT651 N            | 74ABT651 N    | SOT222-1   |
| 24-Pin plastic SO           | −40°C to +85°C    | 74ABT651 D            | 74ABT651 D    | SOT137-1   |
| 24-Pin Plastic SSOP Type II | −40°C to +85°C    | 74ABT651 DB           | 74ABT651 DB   | SOT340-1   |
| 24-Pin Plastic TSSOP Type I | −40°C to +85°C    | 74ABT651 PW           | 74ABT651PW DH | SOT355-1   |

## PIN CONFIGURATION

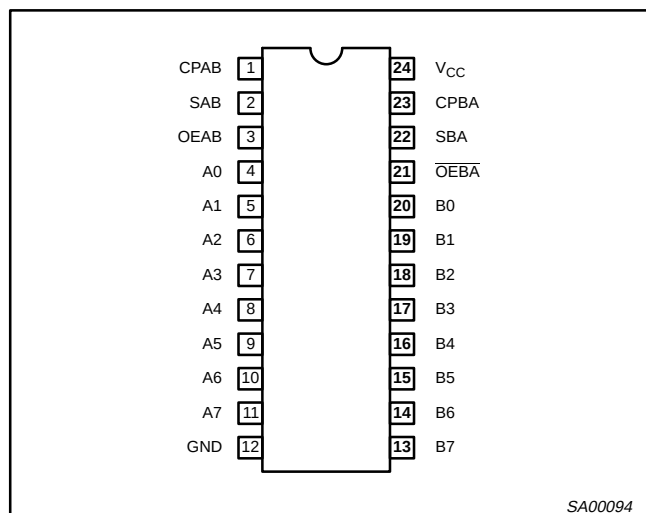


## PIN DESCRIPTION

| PIN NUMBER                     | SYMBOL                          | FUNCTION                                                             |
|--------------------------------|---------------------------------|----------------------------------------------------------------------|
| 1, 23                          | CPAB / CPBA                     | A to B clock input / B to A clock input                              |
| 2, 22                          | SAB / SBA                       | A to B select input / B to A select input                            |
| 3, 21                          | OEAB / $\overline{\text{OEBA}}$ | A to B Output Enable input / B to A Output Enable input (active-Low) |
| 4, 5, 6, 7, 8, 9, 10, 11       | A0 – A7                         | Data inputs/outputs (A side)                                         |
| 20, 19, 18, 17, 16, 15, 14, 13 | B0 – B7                         | Data inputs/outputs (B side)                                         |
| 12                             | GND                             | Ground (0V)                                                          |
| 24                             | $V_{\text{CC}}$                 | Positive supply voltage                                              |



Octal transceiver/register, inverting (3-State)

74ABT651

LOGIC SYMBOL (IEEE/IEC)

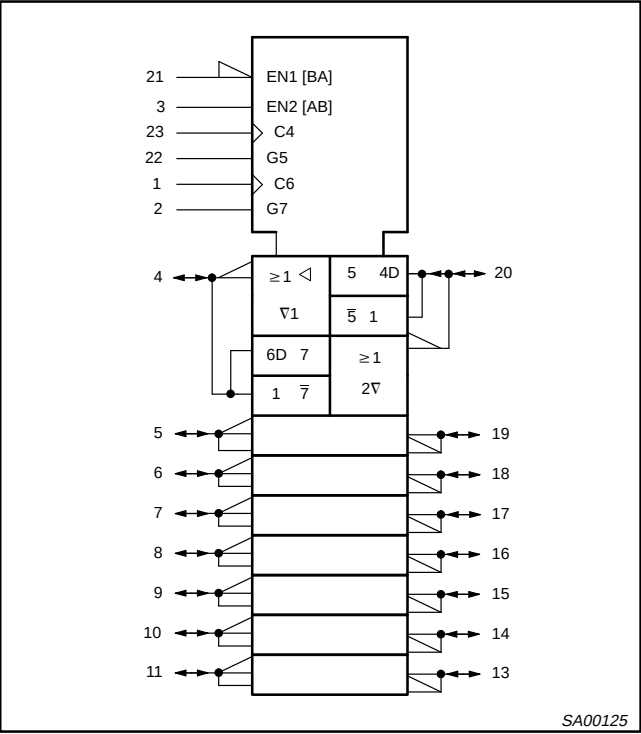

LOGIC SYMBOL

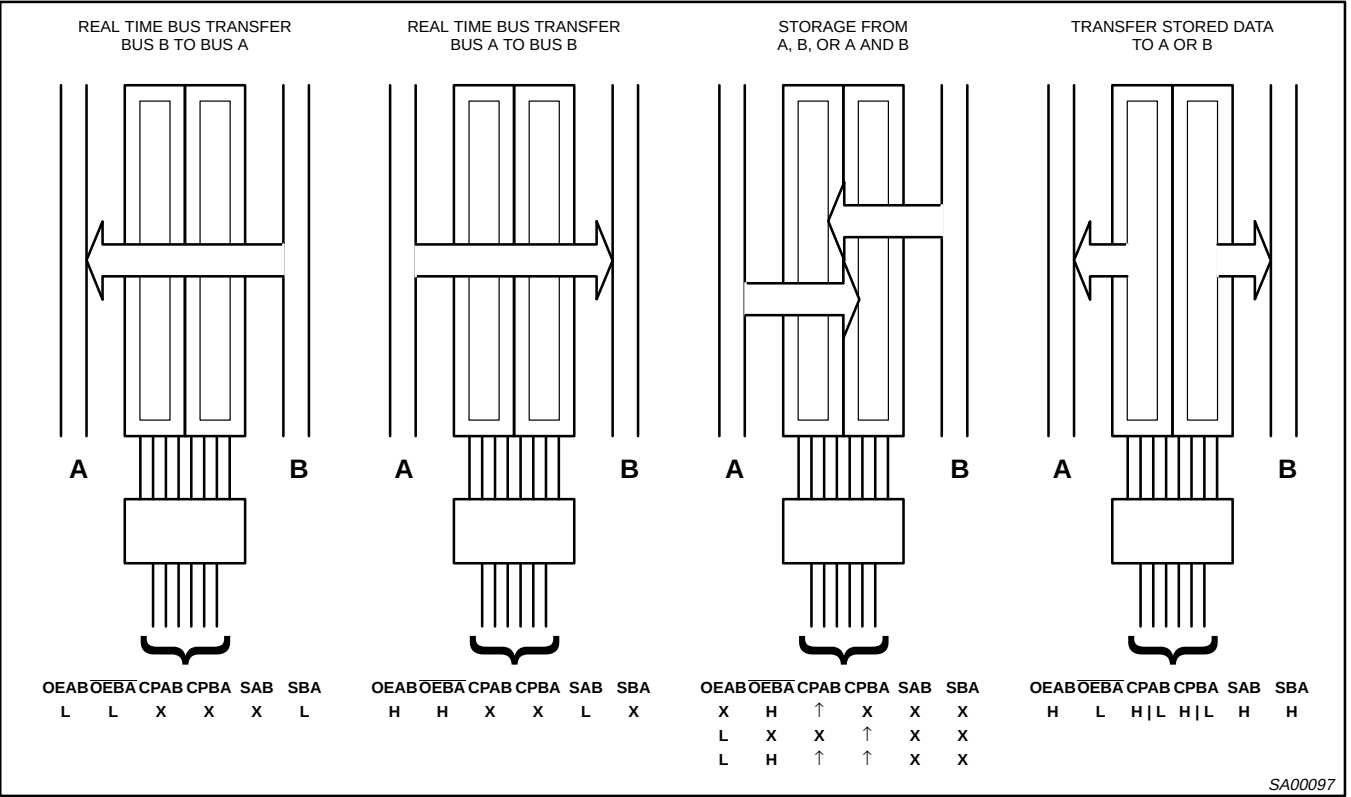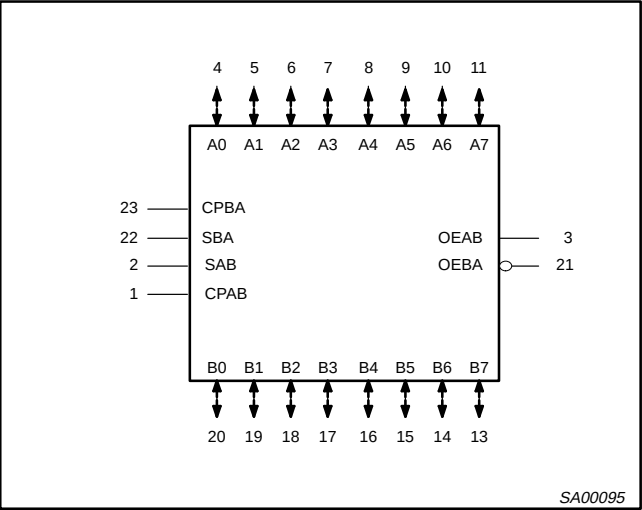

Octal transceiver/register, inverting (3-State)

74ABT651

FUNCTION TABLE


| INPUTS |        |             |             |         |         | DATA I/O               |                        | OPERATING MODE                                                                |
|--------|--------|-------------|-------------|---------|---------|------------------------|------------------------|-------------------------------------------------------------------------------|
| OEAB   | OEBA   | CPAB        | CPBA        | SAB     | SBA     | An                     | Bn                     |                                                                               |
| L<br>L | H<br>H | H or L<br>↑ | H or L<br>↑ | X<br>X  | X<br>X  | Input                  | Input                  | Isolation<br>Store A and B data                                               |
| X<br>H | H<br>H | ↑<br>↑      | H or L<br>↑ | X<br>** | X<br>X  | Input                  | Unspecified<br>output* | Store A, Hold B<br>Store A in both registers                                  |
| L<br>L | X<br>L | H or L<br>↑ | ↑<br>↑      | X<br>X  | X<br>** | Unspecified<br>output* | Input                  | Hold A, Store B<br>Store B in both registers                                  |
| L<br>L | L<br>L | X<br>X      | X<br>H or L | X<br>X  | L<br>H  | Output                 | Input                  | Real time $\overline{B}$ data to A bus<br>Stored $\overline{B}$ data to A bus |
| H<br>H | H<br>H | X<br>H or L | X<br>X      | L<br>H  | X<br>X  | Input                  | Output                 | Real time $\overline{A}$ data to B bus<br>Store $\overline{A}$ data to B bus  |
| H      | L      | H or L      | H or L      | H       | H       | Output                 | Output                 | Stored $\overline{A}$ data to B bus<br>Stored $\overline{B}$ data to A bus    |

H = High voltage level  
L = Low voltage level  
X = Don't care  
↑ = Low-to-High clock transition

\* The data output function may be enabled or disabled by various signals at the  $\overline{OEBA}$  and OEAB inputs. Data input functions are always enabled, i.e., data at the bus pins will be stored on every Low-to-High transition of the clock.

\*\* If both Select controls (SAB and SBA) are Low, then clocks can occur simultaneously. If either Select control is High, the clocks must be staggered in order to load both registers.

LOGIC DIAGRAM

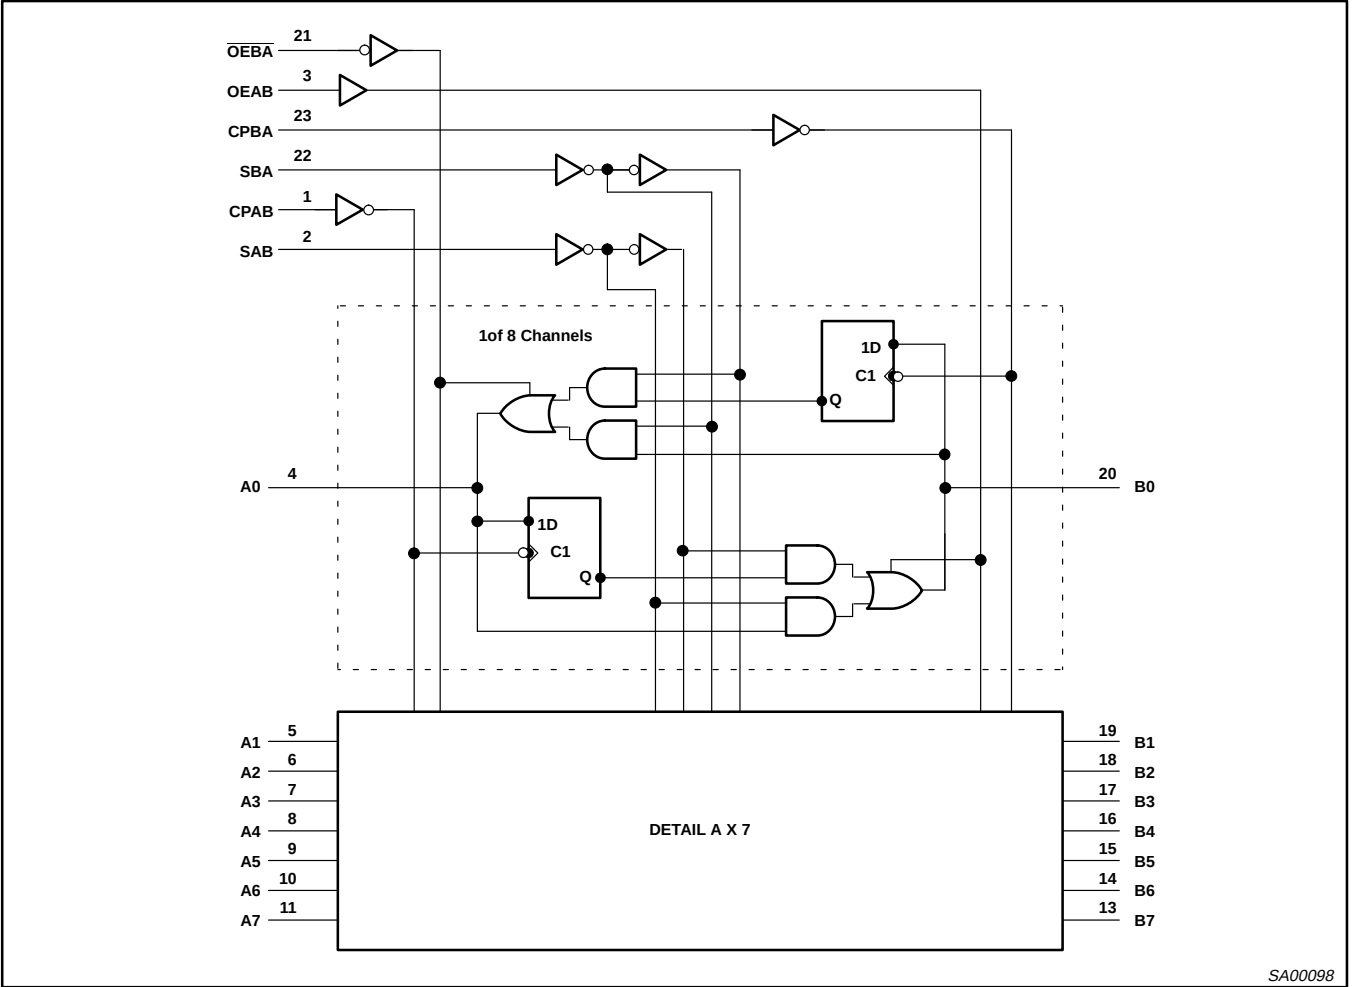

## Octal transceiver/register, inverting (3-State)

74ABT651

**ABSOLUTE MAXIMUM RATINGS<sup>1, 2</sup>**

| SYMBOL    | PARAMETER                      | CONDITIONS                  | RATING       | UNIT |
|-----------|--------------------------------|-----------------------------|--------------|------|
| $V_{CC}$  | DC supply voltage              |                             | −0.5 to +7.0 | V    |
| $I_{IK}$  | DC input diode current         | $V_I < 0$                   | −18          | mA   |
| $V_I$     | DC input voltage <sup>3</sup>  |                             | −1.2 to +7.0 | V    |
| $I_{OK}$  | DC output diode current        | $V_O < 0$                   | −50          | mA   |
| $V_{OUT}$ | DC output voltage <sup>3</sup> | output in Off or High state | −0.5 to +5.5 | V    |
| $I_{OUT}$ | DC output current              | output in Low state         | 128          | mA   |
| $T_{stg}$ | Storage temperature range      |                             | −65 to 150   | °C   |

**NOTES:**

1. Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
2. The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability. The maximum junction temperature of this integrated circuit should not exceed 150°C.
3. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

**RECOMMENDED OPERATING CONDITIONS**

| SYMBOL              | PARAMETER                            | LIMITS |          | UNIT |
|---------------------|--------------------------------------|--------|----------|------|
|                     |                                      | Min    | Max      |      |
| $V_{CC}$            | DC supply voltage                    | 4.5    | 5.5      | V    |
| $V_I$               | Input voltage                        | 0      | $V_{CC}$ | V    |
| $V_{IH}$            | High-level input voltage             | 2.0    |          | V    |
| $V_{IL}$            | Low-level input voltage              |        | 0.8      | V    |
| $I_{OH}$            | High-level output current            |        | −32      | mA   |
| $I_{OL}$            | Low-level output current             |        | 64       | mA   |
| $\Delta t/\Delta v$ | Input transition rise or fall rate   | 0      | 10       | ns/V |
| $T_{amb}$           | Operating free-air temperature range | −40    | +85      | °C   |

## Octal transceiver/register, inverting (3-State)

74ABT651

## DC ELECTRICAL CHARACTERISTICS

| SYMBOL                             | PARAMETER                                            |              | TEST CONDITIONS                                                                                                      | LIMITS                   |       |      |                                   |      | UNIT |
|------------------------------------|------------------------------------------------------|--------------|----------------------------------------------------------------------------------------------------------------------|--------------------------|-------|------|-----------------------------------|------|------|
|                                    |                                                      |              |                                                                                                                      | T <sub>amb</sub> = +25°C |       |      | T <sub>amb</sub> = -40°C to +85°C |      |      |
|                                    |                                                      |              |                                                                                                                      | Min                      | Typ   | Max  | Min                               | Max  |      |
| V <sub>IK</sub>                    | Input clamp voltage                                  |              | V <sub>CC</sub> = 4.5V; I <sub>IK</sub> = -18mA                                                                      |                          | -0.9  | -1.2 |                                   | -1.2 | V    |
| V <sub>OH</sub>                    | High-level output voltage                            |              | V <sub>CC</sub> = 4.5V; I <sub>OH</sub> = -3mA; V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>                  | 2.5                      | 3.2   |      | 2.5                               |      | V    |
|                                    |                                                      |              | V <sub>CC</sub> = 5.0V; I <sub>OH</sub> = -3mA; V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>                  | 3.0                      | 3.7   |      | 3.0                               |      | V    |
|                                    |                                                      |              | V <sub>CC</sub> = 4.5V; I <sub>OH</sub> = -32mA; V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>                 | 2.0                      | 2.30  |      | 2.0                               |      | V    |
| V <sub>OL</sub>                    | Low-level output voltage                             |              | V <sub>CC</sub> = 4.5V; I <sub>OL</sub> = 64mA; V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>                  |                          | 0.42  | 0.55 |                                   | 0.55 | V    |
| V <sub>RST</sub> <sup>3</sup>      | Power-up output low voltage                          |              | V <sub>CC</sub> = 5.5V; I <sub>O</sub> = 1mA; V <sub>I</sub> = GND or V <sub>CC</sub>                                |                          | 0.13  | 0.55 |                                   | 0.55 | V    |
| I <sub>I</sub>                     | Input leakage current                                | Control pins | V <sub>CC</sub> = 5.5V; V <sub>I</sub> = GND or 5.5V                                                                 |                          | ±0.01 | ±1.0 |                                   | ±1.0 | μA   |
|                                    |                                                      | Data pins    | V <sub>CC</sub> = 5.5V; V <sub>I</sub> = GND or 5.5V                                                                 |                          | ±5    | ±100 |                                   | ±100 | μA   |
| I <sub>OFF</sub>                   | Power-off leakage current                            |              | V <sub>CC</sub> = 0.0V; V <sub>O</sub> or V <sub>I</sub> ≤ 4.5V                                                      |                          | ±5.0  | ±100 |                                   | ±100 | μA   |
| I <sub>PU</sub> /I <sub>PD</sub>   | Power-up/down 3-State output current <sup>4</sup>    |              | V <sub>CC</sub> = 2.1V; V <sub>O</sub> = 0.5V; V <sub>OE</sub> = Don't Care; V <sub>I</sub> = GND or V <sub>CC</sub> |                          | ±5.0  | ±50  |                                   | ±50  | μA   |
| I <sub>IH</sub> + I <sub>OZH</sub> | 3-State output High current                          |              | V <sub>CC</sub> = 5.5V; V <sub>O</sub> = 2.7V; V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>                   |                          | 5.0   | 50   |                                   | 50   | μA   |
| I <sub>IL</sub> + I <sub>OZL</sub> | 3-State output Low current                           |              | V <sub>CC</sub> = 5.5V; V <sub>O</sub> = 0.5V; V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>                   |                          | -5.0  | -50  |                                   | -50  | μA   |
| I <sub>CEX</sub>                   | Output High leakage current                          |              | V <sub>CC</sub> = 5.5V; V <sub>O</sub> = 5.5V; V <sub>I</sub> = GND or V <sub>CC</sub>                               |                          | 5.0   | 50   |                                   | 50   | μA   |
| I <sub>O</sub>                     | Output current <sup>1</sup>                          |              | V <sub>CC</sub> = 5.5V; V <sub>O</sub> = 2.5V                                                                        | -40                      | -65   | -180 | -40                               | -180 | mA   |
| I <sub>CCH</sub>                   | Quiescent supply current                             |              | V <sub>CC</sub> = 5.5V; Outputs High, V <sub>I</sub> = GND or V <sub>CC</sub>                                        |                          | 110   | 250  |                                   | 250  | μA   |
| I <sub>CCL</sub>                   |                                                      |              | V <sub>CC</sub> = 5.5V; Outputs Low, V <sub>I</sub> = GND or V <sub>CC</sub>                                         |                          | 20    | 30   |                                   | 30   | mA   |
| I <sub>CCZ</sub>                   |                                                      |              | V <sub>CC</sub> = 5.5V; Outputs 3-State; V <sub>I</sub> = GND or V <sub>CC</sub>                                     |                          | 110   | 250  |                                   | 250  | μA   |
| ΔI <sub>CC</sub>                   | Additional supply current per input pin <sup>2</sup> |              | V <sub>CC</sub> = 5.5V; one input at 3.4V, other inputs at V <sub>CC</sub> or GND; V <sub>CC</sub> = 5.5V            |                          | 0.3   | 1.5  |                                   | 1.5  | mA   |

## NOTES:

1. Not more than one output should be tested at a time, and the duration of the test should not exceed one second.
2. This is the increase in supply current for each input at 3.4V.
3. For valid test results, data must not be loaded into the flip-flops (or latches) after applying the power.
4. This parameter is valid for any V<sub>CC</sub> between 0V and 2.1V, with a transition time of up to 10msec. From V<sub>CC</sub> = 2.1V to V<sub>CC</sub> = 5V ± 10%, a transition time of up to 100μsec is permitted.

## AC CHARACTERISTICS

GND = 0V, t<sub>R</sub> = t<sub>F</sub> = 2.5ns, C<sub>L</sub> = 50pF, R<sub>L</sub> = 500Ω

| SYMBOL                               | PARAMETER                                     | WAVEFORM | LIMITS                                              |            |            |                                                                  |            | UNIT |
|--------------------------------------|-----------------------------------------------|----------|-----------------------------------------------------|------------|------------|------------------------------------------------------------------|------------|------|
|                                      |                                               |          | T <sub>amb</sub> = +25°C<br>V <sub>CC</sub> = +5.0V |            |            | T <sub>amb</sub> = -40 to +85°C<br>V <sub>CC</sub> = +5.0V ±0.5V |            |      |
|                                      |                                               |          | Min                                                 | Typ        | Max        | Min                                                              | Max        |      |
| f <sub>MAX</sub>                     | Maximum clock frequency                       | 1        | 125                                                 | 300        |            | 125                                                              |            | MHz  |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation delay<br>CPAB to Bn or CPBA to An | 1        | 2.2<br>1.7                                          | 3.8<br>4.4 | 5.1<br>5.1 | 2.2<br>1.7                                                       | 5.6<br>5.6 | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation delay<br>An to Bn or Bn to An     | 2        | 1.5<br>1.5                                          | 3.2<br>3.7 | 5.1<br>4.6 | 1.5<br>1.5                                                       | 6.2<br>5.4 | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation delay<br>SAB to Bn or SBA to An   | 3        | 1.5<br>1.5                                          | 3.8<br>4.4 | 5.1<br>4.9 | 1.5<br>1.5                                                       | 6.5<br>5.9 | ns   |
| t <sub>PZH</sub><br>t <sub>PZL</sub> | Output enable time<br>OEBA to An              | 5<br>6   | 1.3<br>2.5                                          | 3.7<br>4.7 | 4.6<br>6.8 | 1.3<br>2.5                                                       | 5.8<br>8.5 | ns   |
| t <sub>PHZ</sub><br>t <sub>PLZ</sub> | Output disable time<br>OEBA to An             | 5<br>6   | 1.5<br>1.5                                          | 4.0<br>3.2 | 4.5<br>3.8 | 1.5<br>1.5                                                       | 5.0<br>4.1 | ns   |
| t <sub>PZH</sub><br>t <sub>PZL</sub> | Output enable time<br>OEAB to Bn              | 5<br>6   | 1.8<br>2.9                                          | 3.4<br>4.5 | 6.1<br>6.5 | 1.8<br>2.9                                                       | 6.5<br>7.4 | ns   |
| t <sub>PHZ</sub><br>t <sub>PLZ</sub> | Output disable time<br>OEAB to Bn             | 5<br>6   | 1.5<br>1.5                                          | 3.8<br>3.1 | 4.5<br>4.4 | 1.5<br>1.5                                                       | 5.5<br>5.1 | ns   |

## Octal transceiver/register, inverting (3-State)


74ABT651

## AC SETUP REQUIREMENTS


GND = 0V,  $t_R = t_F = 2.5\text{ns}$ ,  $C_L = 50\text{pF}$ ,  $R_L = 500\Omega$ 

| SYMBOL                             | PARAMETER                                | WAVEFORM | LIMITS                                                                 |              |                                                                                                        | UNIT |
|------------------------------------|------------------------------------------|----------|------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------|------|
|                                    |                                          |          | $T_{\text{amb}} = +25^\circ\text{C}$<br>$V_{\text{CC}} = +5.0\text{V}$ |              | $T_{\text{amb}} = -40 \text{ to } +85^\circ\text{C}$<br>$V_{\text{CC}} = +5.0\text{V} \pm 0.5\text{V}$ |      |
|                                    |                                          |          | Min                                                                    | Typ          | Min                                                                                                    |      |
| $t_S(\text{H})$<br>$t_S(\text{L})$ | Setup time<br>An to CPAB, Bn to CPBA     | 4        | 3.0<br>3.0                                                             | 1.2<br>0.8   | 3.0<br>3.0                                                                                             | ns   |
| $t_H(\text{H})$<br>$t_H(\text{L})$ | Hold time<br>An to CPAB, Bn to CPBA      | 4        | 0.0<br>0.0                                                             | -0.8<br>-0.9 | 0.0<br>0.0                                                                                             | ns   |
| $t_W(\text{H})$<br>$t_W(\text{L})$ | Pulse width, High or Low<br>CPAB or CPBA | 1        | 4.0<br>4.0                                                             | 1.2<br>1.1   | 4.0<br>4.0                                                                                             | ns   |


## AC WAVEFORMS

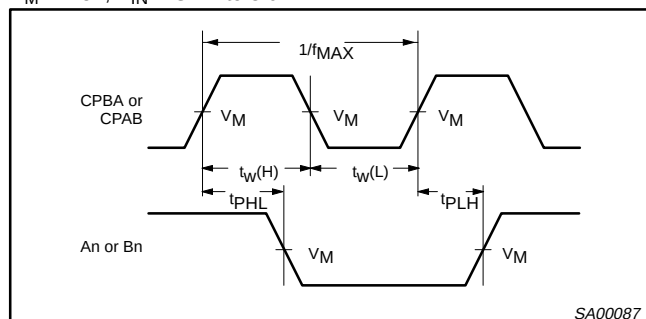 $V_M = 1.5\text{V}$ ,  $V_{\text{IN}} = \text{GND to } 3.0\text{V}$ 


Waveform 1. Propagation Delay, Clock Input to Output, Clock Pulse Width, and Maximum Clock Frequency

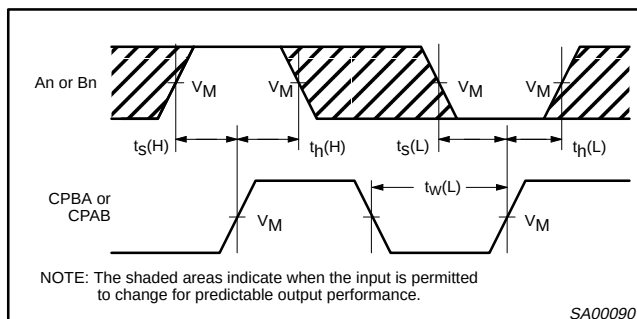


Waveform 4. Data Setup and Hold Times

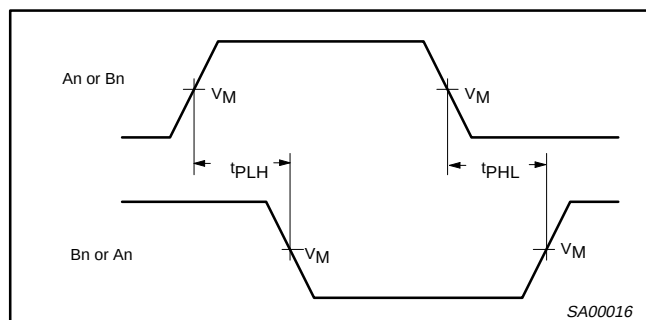


Waveform 2. Propagation Delay, An to Bn or Bn to An

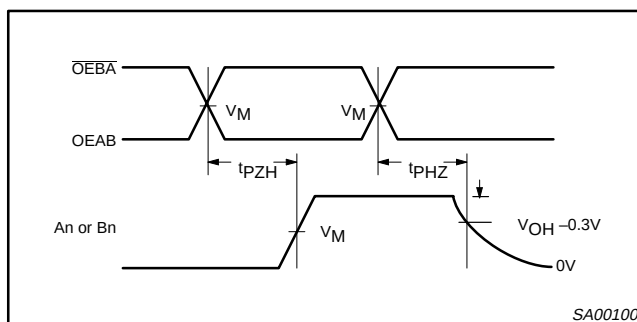

Waveform 5. 3-State Output Enable Time to High Level and Output Disable Time from High Level

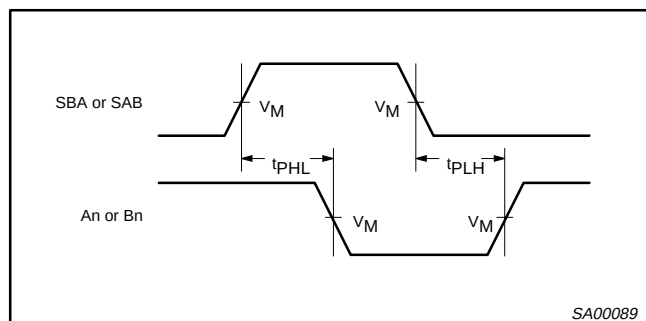

Waveform 3. Propagation Delay, SBA to An or SAB to Bn

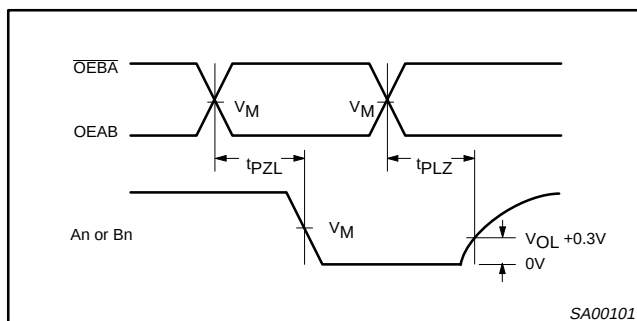

Waveform 6. 3-State Output Enable Time to Low Level and Output Disable Time from Low Level

Octal transceiver/register, inverting (3-State)

74ABT651

TEST CIRCUIT AND WAVEFORM

