

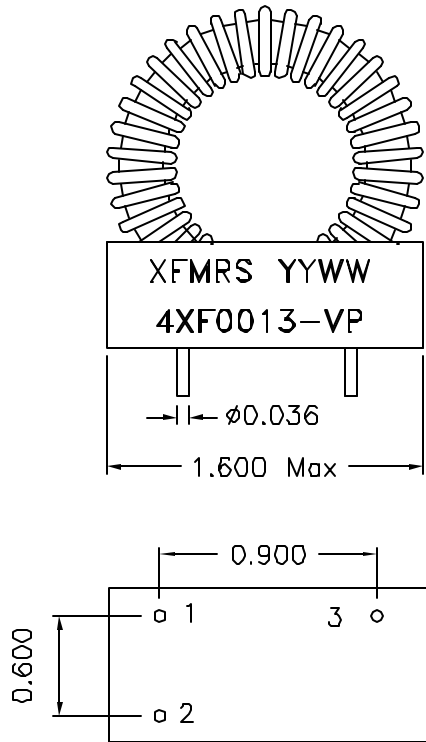


1. Mechanical Dimensions:

2. Schematic:



Bottom View

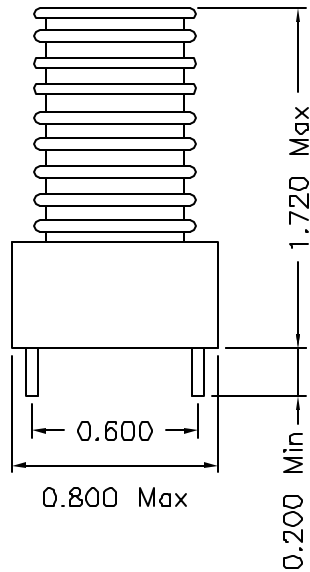

3. Electrical Specifications: @25°C

OCL: 1000uH±15% @10KHz 0.1V

OCL: 470uH Typical @10KHz 0.1V 3.5ADC

DC Resistance: 0.130 Ohms Maximum

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151558
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV A/1

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: TOROIDAL INDUCTOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: 4XF0013-VP		REV A
	DWN.	李清儿	Apr-20-07
SHEET 1 OF 1	CHK.	孙小松	Apr-20-07
	APP.	BW	Apr-20-07