EPCOS

SAW Components

Data Sheet B7730, Pb-Free

Chip **S**ized **S**AW **P**ackage **DCS4H**

Features

- Low-loss RF filter for mobile telephone Cell systems, receive path
- High Tx band selectivity
- Low amplitude ripple
- Usable passband 25 MHz
- Suitable for GPRS class 1 to 12
- Package for Surface Mounted Technology (SMT)
- Pb-Free

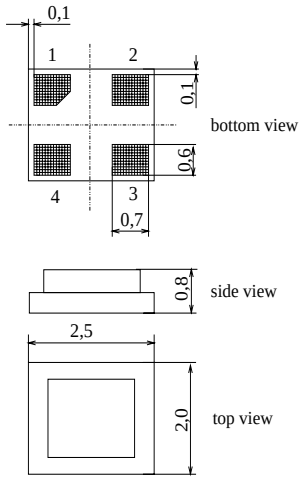

Terminals

- Gold-plated Ni

Dimensions in mm, approx. weight 0,015 g

Pin configuration

1	Input
3	Output
2, 4	Ground



Type	Ordering code	Marking and Package according to	Packing according to
B7730	B39881-B7730-K710	C61157-A7-A136	F61074-V8189-Z000

Electrostatic **S**ensitive **D**evice (**ESD**)

Maximum ratings

Operable temperature range	T	– 40/+ 85	˚C	
Storage temperature range	T_{stg}	– 40/+ 85	˚C	
DC voltage	V_{DC}	5	V	
ESD voltage	V^*_{ESD}	100*	V	Machine Model, 10 pulses
Input power at GSM850, GSM900, GSM1800 and GSM1900 Tx bands	P_{IN}	15	dBm	peak power of GSM signal, duty cycle 4:8

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses

Characteristics

Operating temperature range: T = -30 to +85 ˚C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω

		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	α_{max}				
869,0 ... 894,0 MHz		—	2,5	2,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	0,9	1,1	dB
Return loss					
869,0 ... 894,0 MHz		10,0	12,0	—	dB
Attenuation	α				
0,0 ... 824,0 MHz		45,0	55,0	—	dB
824,0 ... 849,0 MHz		45,0	50,0	—	dB
914,0 ... 924,0 MHz		24,0	26,0	—	dB
924,0 ... 950,0 MHz		35,0	40,0	—	dB
950,0 ... 997,0 MHz		35,0	50,0	—	dB
997,0 ...2200,0 MHz		40,0	50,0	—	dB
2200,0 ...3000,0 MHz		35,0	42,0	—	dB
3000,0 ...4000,0 MHz		20,0	28,0	—	dB
4000,0 ...6000,0 MHz		10,0	18,0	—	dB
Tx band suppression	α				
824,0 ... 849,0 MHz		45,0	50,0	—	dB

Transfer function (narrowband measurement at 25 °C)

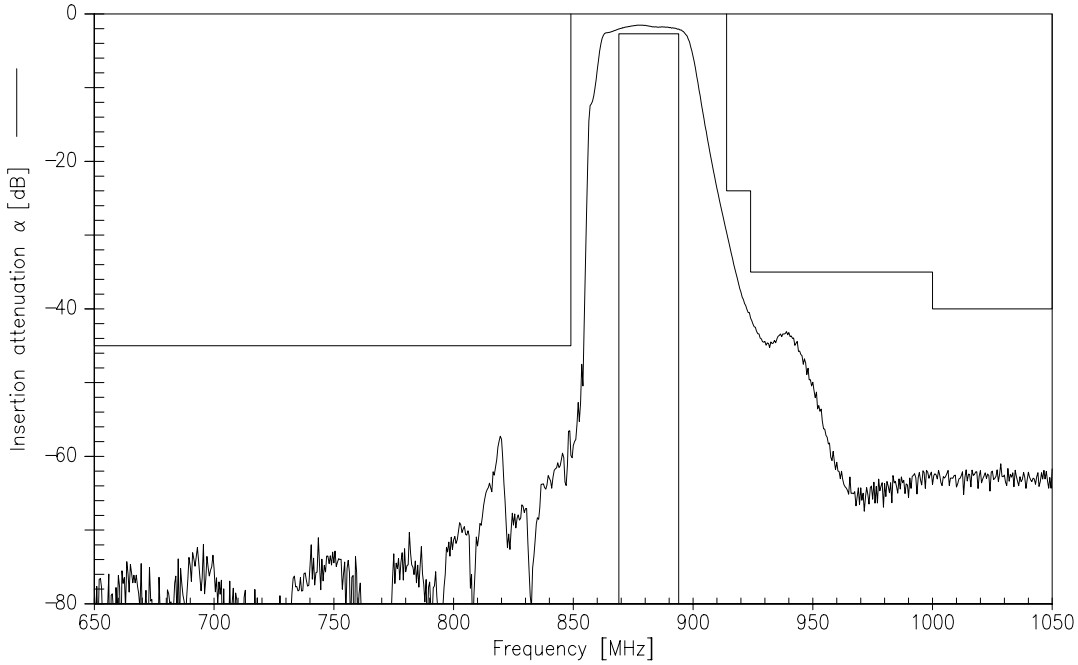

Transfer function (wideband measurement)

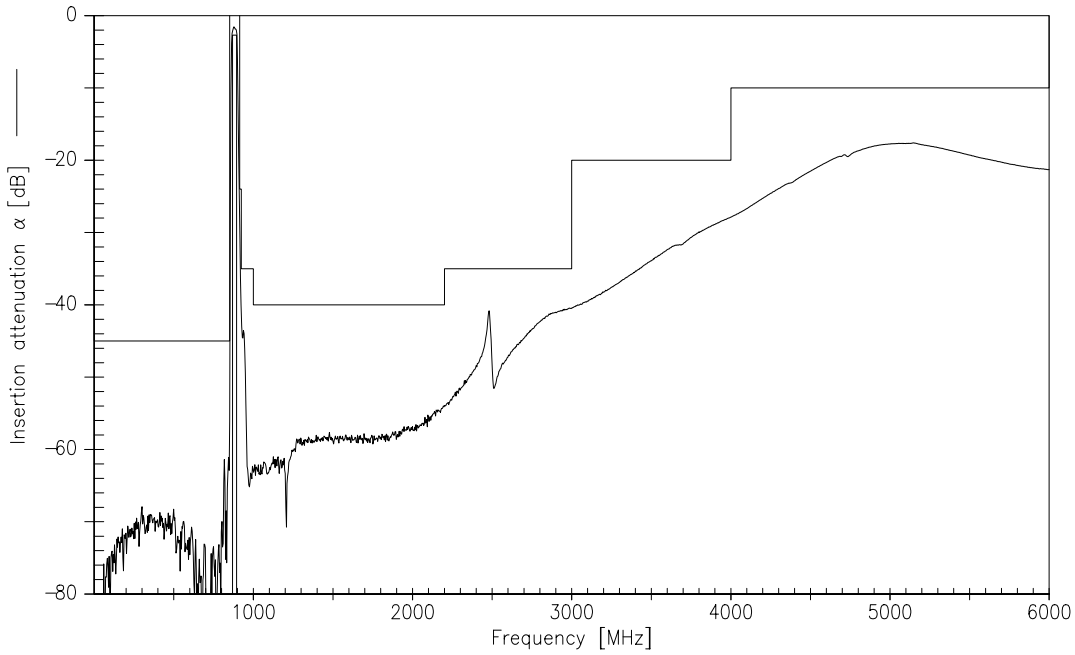

Reflection functions

S_{11}

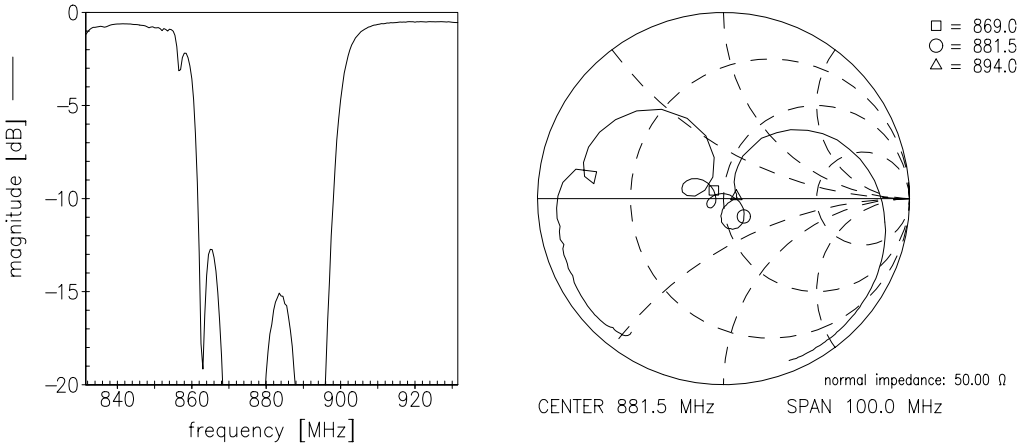

S_{22}

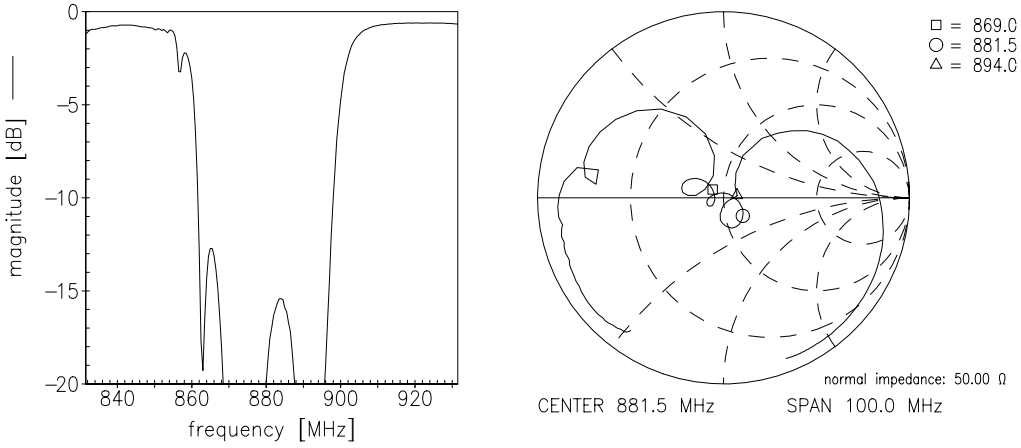

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC PD
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.