

HIGH VOLTAGE SURFACE MOUNT SWITCHING DIODE

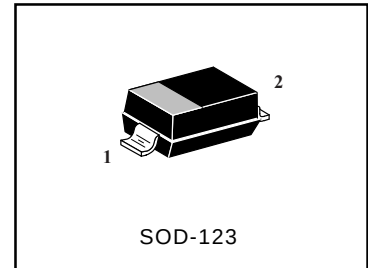
FEATURE

- Fast Switching Speed
- High Conductance
- High Reverse Breakdown Voltage Rating
- We declare that the material of product compliance with RoHS requirements.
- S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.


Ordering Information(Pb-free)

Device	Marking	Shipping
LBAV3004T1G S-LBAV3004T1G	34W	3000/Tape&Reel
LBAV3004T3G S-LBAV3004T3G	34W	10000/Tape&Reel

LBAV3004T1G
S-LBAV3004T1G



Equivalent Circuit Diagram



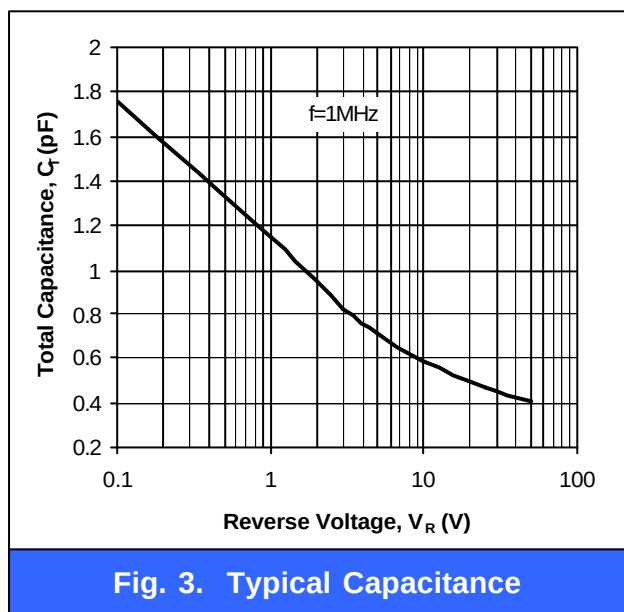
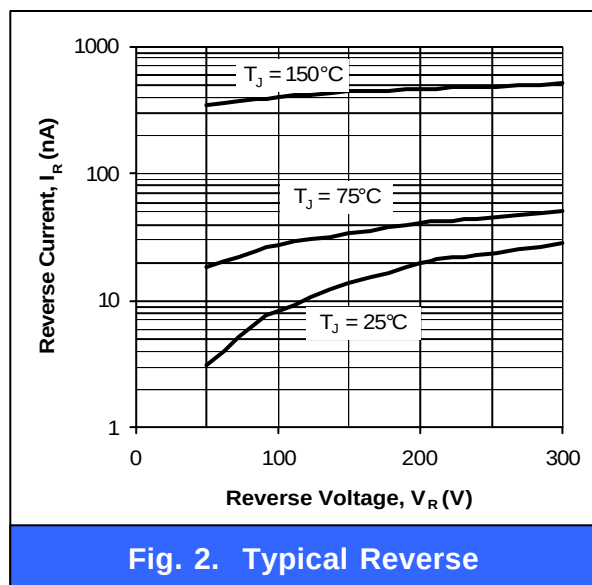
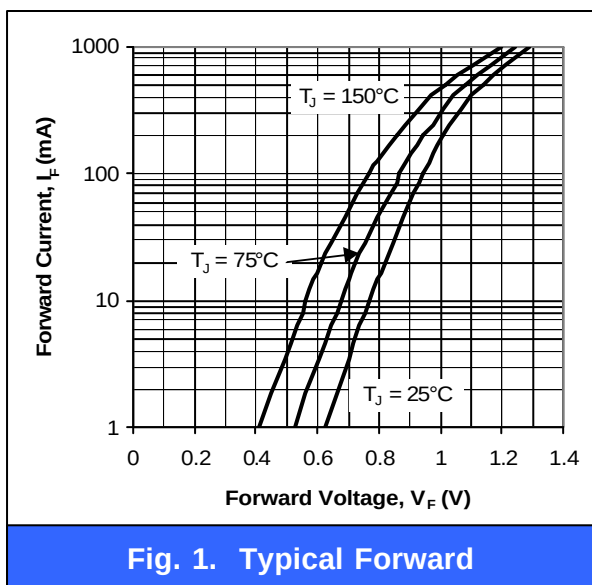
Maximum Ratings @ TA=25℃ unless otherwise specified

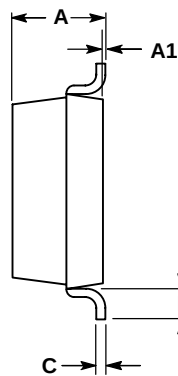
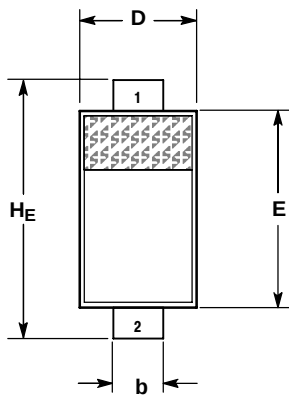
Characteristic	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	VRRM	350	V
RMS Reverse Voltage	VR(RMS)	240	V
Forward Continuous Current(Note 2)	IF	200	mA
Non-Repetitive Peak Forward Surge Current @t=1.0μs @t=1.0s	IFSM	4.0 1.0	A
Power Dissipation(Note 2)	Pd	410	mW
Thermal Resistance Junction to Ambient Air(Note 2)	RθJA	500	℃/W
Operating and Storage Temperature Range	Tj, TSTG	-65 to +150	℃

Electrical Characteristics @ TA=25℃ unless otherwise specified, per element

Characteristic	Symbol	Min	Typ	MAX	Unit	Test Condition
Reverse Breakdown Voltage(Note 1)	V(BR)R	350			V	IR=150μA
Forward Voltage(Note 1)	VF		0.78 0.93 1.03	0.87 1.0 1.25	V	IF=20mA IF=100mA IF=200mA
Reverse Current(Note 1)	IR		30 35	100 100	nA μA	VR=240V VR=240V, Tj=150℃
Total Capacitance	CT		1.0	5.0	Pf	VR=0V, f=1.0MHZ
Reverse Recovery Time	Trr			50	ns	IF=IR=30mA Irr=3.0mA, RL=100Ω

- Notes: 1. Short duration test pulse used to minimize self-heating effect.
2. Part mounted on FR-4 board with recommended pad layout.

LBAV3004T1G,S-LBAV3004T1G


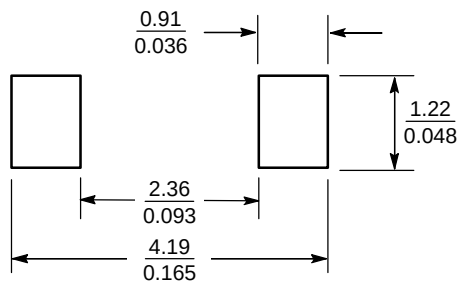
LBAV3004T1G,S-LBAV3004T1G
SOD-123

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.94	1.17	1.35	0.037	0.046	0.053
A1	0.00	0.05	0.10	0.000	0.002	0.004
b	0.51	0.61	0.71	0.020	0.024	0.028
c	---	---	0.15	---	---	0.006
D	1.40	1.60	1.80	0.055	0.063	0.071
E	2.54	2.69	2.84	0.100	0.106	0.112
H _E	3.56	3.68	3.86	0.140	0.145	0.152
L	0.25	---	---	0.010	---	---

STYLE 1:

- PIN 1. CATHODE
2. ANODE

SOLDERING FOOTPRINT*


SCALE 10:1 $\left(\frac{\text{mm}}{\text{inches}} \right)$