
ADELS contact

Fused Connectors

900 SI/ 4 DS

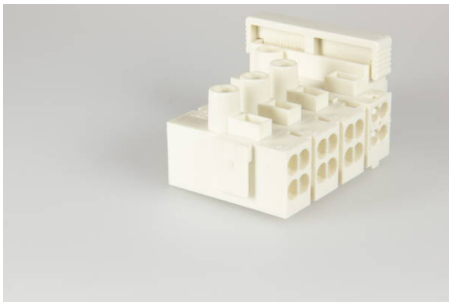

Screw-screwless-Terminal Block, 4 pole, Wire Protector (DS): yes, Fixing: Screw, Voltage Rating: 400 V, Current Rating: 6.3 A

Order Info

Reference Number (ref. no.)	175104
Applications	Lighting, Electrical Appliances
PU	100

Type

Type	Screw-screwless-Terminal Block
Number of poles	4 pole
Clamping Units per Pole	4
Colour	white
Connection Type	Screw-screwless
Wire Protector (DS)	yes

Technical Data

Voltage Rating	400 V
Current Rating	6.3 A
Insulating Material	PA 6.6
Contact Material	Brass
Flammability Rating	V-2
max. Ambient Temperature Operation	70 °C
Assembly Contact Screw	0.8x4.0 / ↻ 0.5 Nm
Internal Core Cross-Section max.	1.5 mm^2
External Core Cross-Section min.	0.5 mm^2
External Core Cross-Section max.	2.5 mm^2
Internal Stripping Length	7.0-7.5 mm
External Stripping Length	8.0-8.5 mm
Fixing	Screw
Internal Core Cross-Section min.	0.5 mm^2
Type of Conductor Solid External	yes
Type of Conductor Flexible External	yes
Type of Conductor Solid Internal	yes
Type of Conductor Stranded Internal	yes

Accessories

ZEL 110	196420