



Stainless Steel Low Profile Vandal Resistant - Momentary - Double Pole

FRONT PANEL MOUNTING

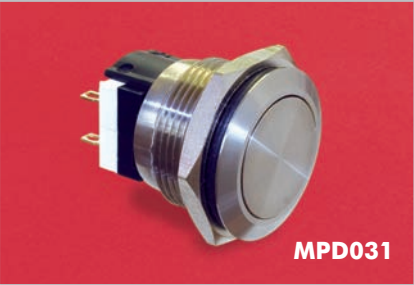

- Front Panel Sealed to IP66
- 21.5mm diameter
- D.P.C.O. Microswitch
- 3A, 125Vac

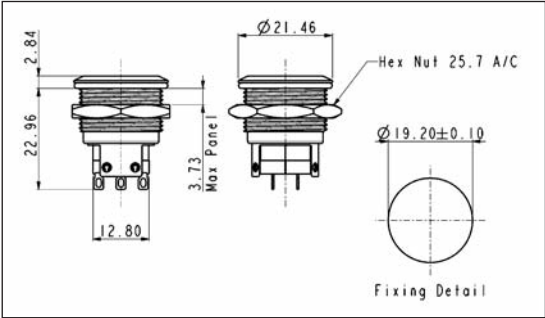

Specification	MPD031		
Terminations:	Solder Tags		
Switching:	D.P.C.O. Momentary Action (Microswitch)		
Max. Rating:	3A, 125Vac		
Contact Resistance:	30-100mΩ max.		
Insulation Resistance:	100MΩ min.		
Dielectric Strength:	1,000VacRMS		
Operating Temp. Range:	-20°C to +70°C		
Sealing (Front of panel only):	Protection Classification: IP66 EN60529 1992 (Micro switch not sealed)		
Operations			
Mechanical:	1,000,000		
Electrical:	10,000 @ 3A, 125Vac		
Rear Nut Fixing Torque:	0.57Nm		
Materials			
Mouldings:	Glass Filled Nylon		
Tags/Terminations:	Brass, Tin Plated		
Switch Body & Button:	Stainless Steel		
Contacts:	Brass, Silver Plated		
Thread size:	0.747" x 26TPI		
RoHS	Compliant		