



NOTES:


1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: $X.X=\pm 0.4$
 $X.XX=\pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
5. OPERATING FORCE: 425 ± 100 CM/STANDARD
6. OPERATING TEMP: -30° to 85° C
7. CIRCUIT SP: Single Throw, 30° INDEX.
8. DESIGNATE MAJOR DIMENSIONS
9. DIELECTRIC STRENGTH: 1000V RMS@ SEA LEVEL.
10. LOCK NUT AND WASHER NOT SHOWN.



CONTACT CONFIGURATION
(BBM)

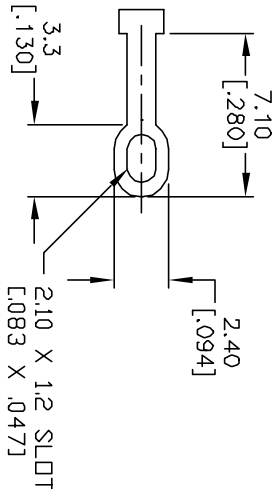

TERMINATION DETAIL
SCALE 2X

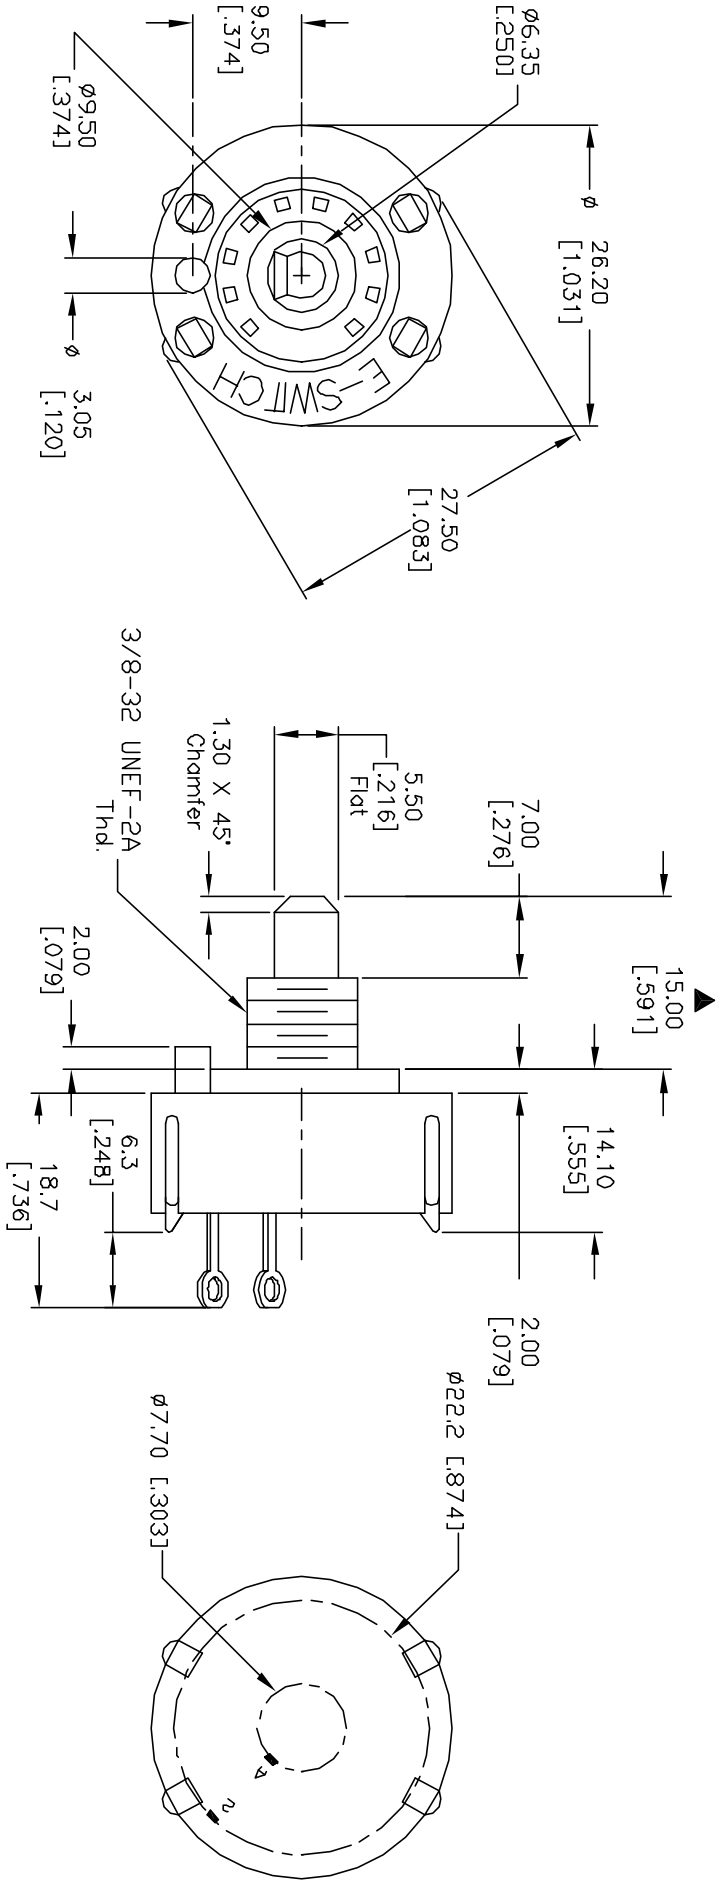

E-SWITCH®

					E-SWITCH®					
					TITLE					
					KC-11-A-01-N-L-S (B=15mm)					
					SCALE					
					1.5:1		DATE		5/30/01	
							DR		CJB	
							DWG		G510892	
							REV		A	