

# Surface Mount Directional Coupler

50Ω 400 to 900 MHz

## JDC-20-2+ JDC-20-2




### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

### Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4


### Outline Drawing

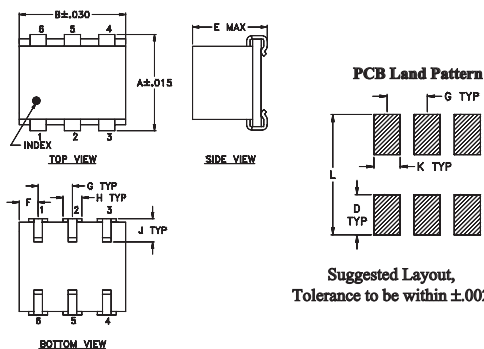

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54
H	J	K	L	wt		
.047	.065	.065	.300	grams		
1.19	1.65	1.65	7.62	0.45		

### Demo Board MCL P/N: TB-185 Suggested PCB Layout (PL-046)

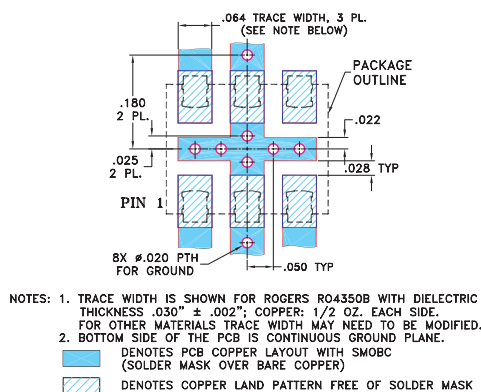

### Features

- low mainline loss, 0.2 dB typ.
- good VSWR, 1.15:1
- excellent solderability

### Applications

- communications
- level detecting
- signal sampling
- reflective power measurements
- cellular

### Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W	
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		Typ.	L Max.
f <sub>L</sub> -f <sub>U</sub>									
400-900	20.5±1.0	±1.0	0.2	0.6	19	13	1.15	2.0	2.0

1. Mainline loss includes theoretical power loss at coupled port.

CASE STYLE: BH292  
PRICE: \$ 13.60 ea. QTY (25-49)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
399.50	0.19	20.43	19.02	25.70	27.30	17.20
499.00	0.20	20.30	19.98	28.30	32.30	18.50
560.00	0.18	20.27	20.02	27.30	28.30	19.10
596.00	0.21	20.23	20.02	26.40	26.40	19.10
632.00	0.23	20.18	19.69	25.70	25.70	19.40
668.00	0.23	20.14	19.79	24.90	24.90	19.40
740.00	0.24	20.02	18.94	23.70	23.70	19.40
776.00	0.24	20.00	18.59	23.10	22.60	19.40
800.00	0.26	19.96	18.23	22.60	22.10	19.40
900.00	0.28	19.77	16.93	22.10	20.80	18.50


JDC-20-2  
MAINLINE LOSS

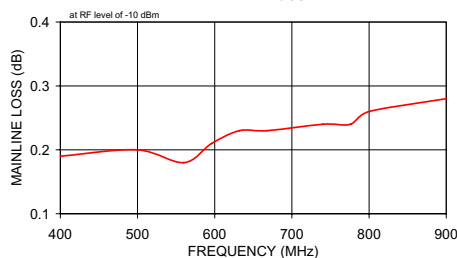


JDC-20-2  
COUPLING & DIRECTIVITY

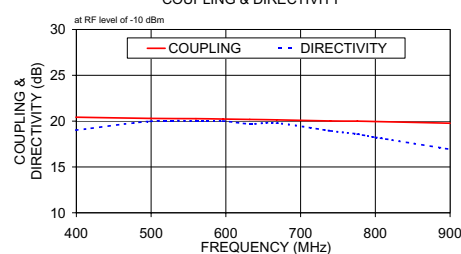

JDC-20-2  
RETURN LOSS

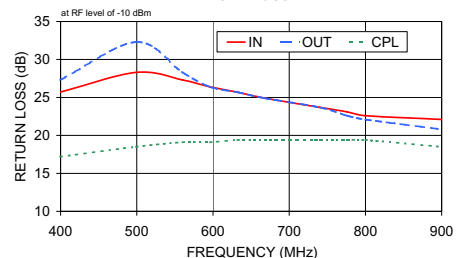

### Electrical Schematic

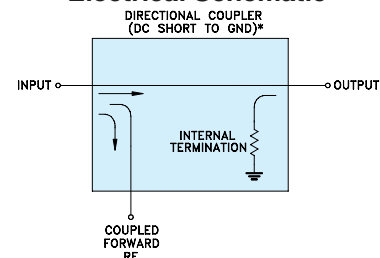

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

[minicircuits.com](http://minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. D  
M119986  
JDC-20-2  
WZ/TD/CP/AM  
081111