



环保物料

TEL:0769-82001899

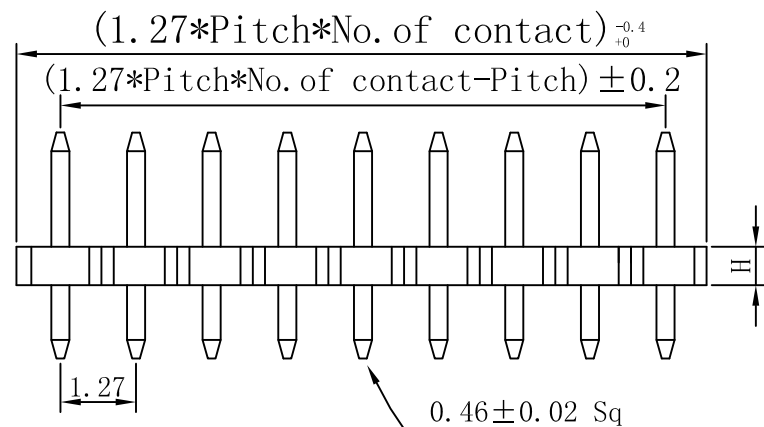

SPECIFICATIONS

Current Rating: 2Amps
 Insulator resistance: 5000 Megchms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Brass
 Insulator Material: NYLON-6T

UNSPECIFIED TOLERANCE: ±0.20

Plastic Base

Type	
H	1.0
PA	3.9
PC	2.3

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	1.27mm Pin Header Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	SCALE	1:1
AO	MODIFICATION		DATE	.XXX	±0.03	.XXX°	±0.5°			PRODUCT NO.	PZ127V-11-XX-0720