WEJ®


RoHS

RA3505-3510

AUTOMOTIVE RECTIFIER

FEATURES

- Low leakage
- Low forward voltage drop
- High current capability
- High forward surge current capability

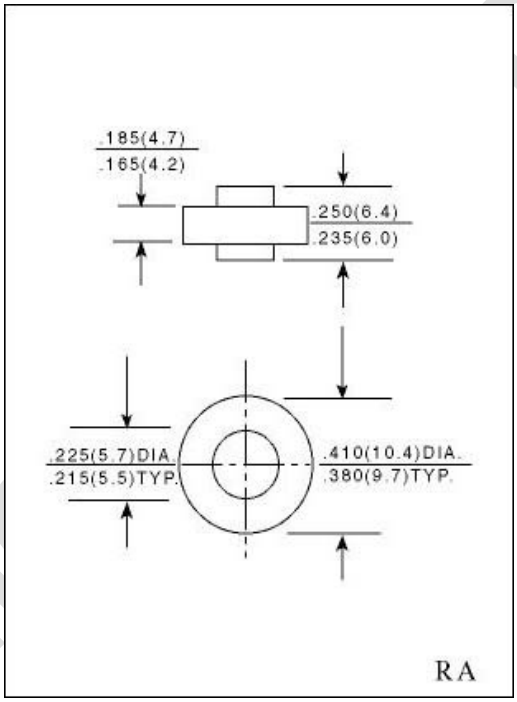

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V - 0 rate flame retardant.
- Polarity: Near Making denotes cathode
- Lead: Plated slug, solderable per MIL - STD - 202E method 208C
- Mounting position: Any
- Weight: 0.067 ounce, 1.90gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25℃ ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

	SYMBOLS	RA 3505	RA 351	RA 352	RA 354	RA 356	RA 358	RA 3510	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, at T_C = 10+A525℃	$I_{(AV)}$	35							Amps
Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method)	I_{FSM}	400							Amps
Maximum Instantaneous Forward Voltage at 35 A	V_F	1.2							Volts
Maximum DC Reverse Current at rated DC blocking voltage, T_A = 25℃	I_R	25							μA
Maximum DC Reverse Current at rated DC blocking voltage, T_C = 100℃	I_R	500							μA
Typical Thermal Resistance	$R_{\theta JC}$	1.0							℃/W
Operating and Storage Temperature Range	T_J, T_{STG}	(-65 to +175)							℃

NOTES:

1.Enough heatsink must be considered in application.

WEJ ELECTRONIC CO.

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

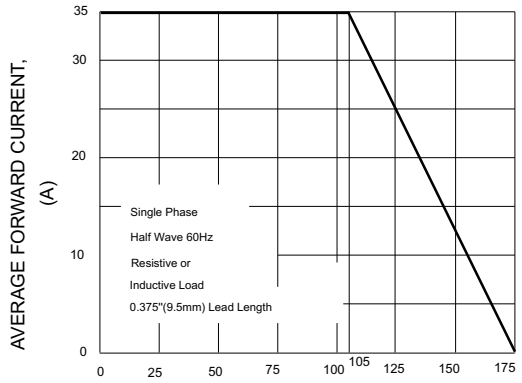


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

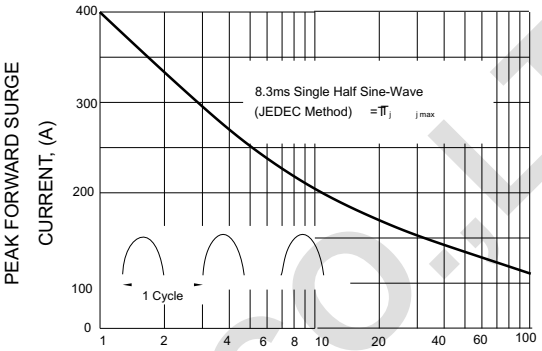


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


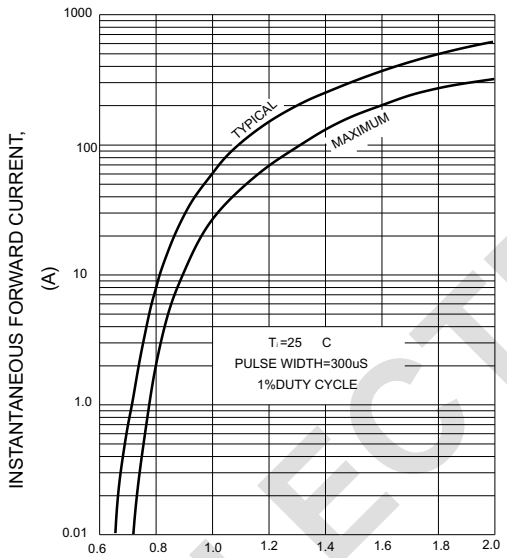


FIG.4. FORWARD POWER DISSIPATION

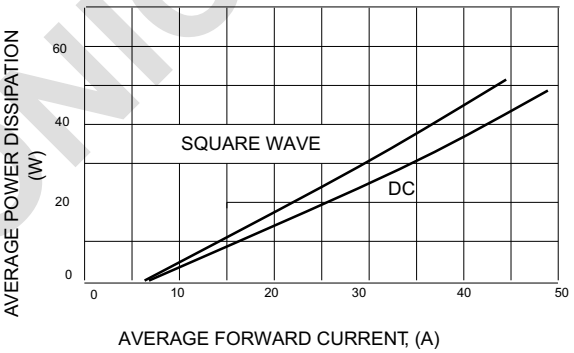

WEJ ELECTRONIC CO.,LTD