环保物料

TEL:0769-82001899

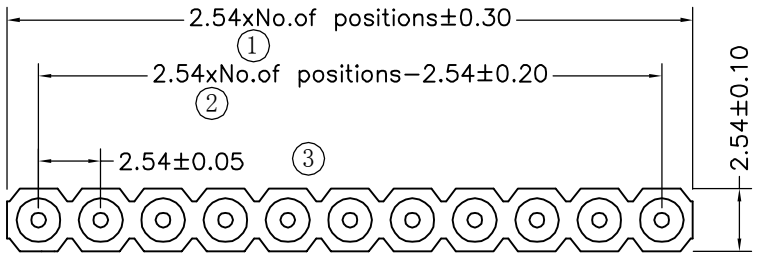

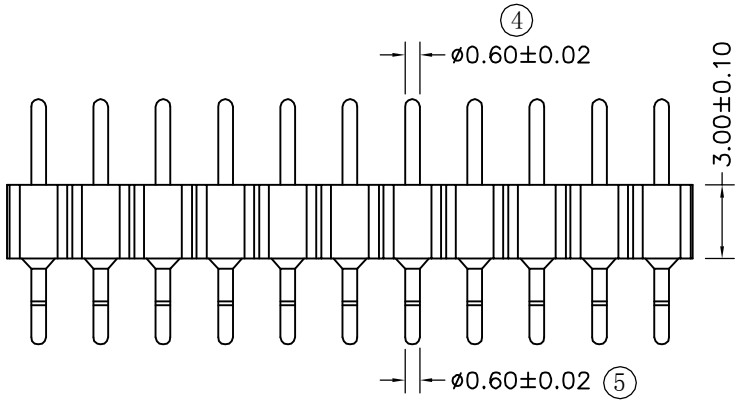

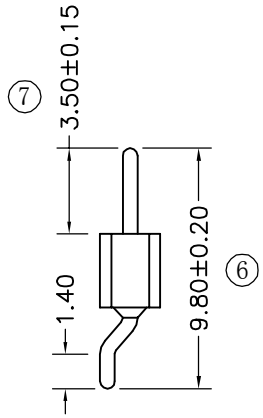

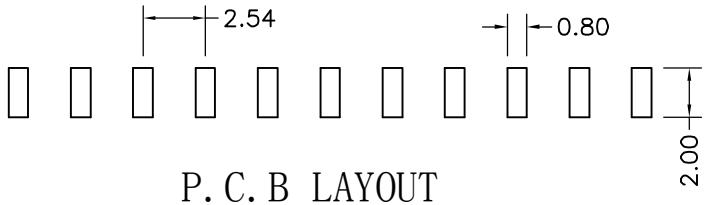

P.C.B LAYOUT

Technical Data
Materlal:
Pin(outer sleeve):Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin Plated:2μm/80μ″NI,5μm/200μ″Sn
Gold Plated:2μm″/80μ″Ni,0.8μ″ gold
Insulator:PPS UL94V-0
Mating pin⌀:0.60mm

Electrlcal:
Current rating:3Amps/contact max.
Contact resistance:≤4mΩ/contact
Insuiation resistance:≥1000MΩ at V=100V
Operaing voltage:60VAC/DC

Mechanlcal:
Mechanical lige:min 500 cycle
Operaling temperature:-40° C to+105° C
Soldering temperature:+255° C
Critical Dimensions: ⊛
N:PIN said the number of

				TOLERANCE UNLESS OTHERWISE						
				X. ±0.30	X° . ±5°	DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.	SHEET	1/1
				.X ±0.20	.X° ±2°	CHKD			DATE	2010.4.12
				.XX ±0.08	.XX° ±1°	APPD		PRODUCT NAME 2.54mm Machined Pin Header	UNITS	mm
A0				.XXX ±0.03	.XXX° ±0.5°	VIEW		PART. NO. MH254RS-11-XX-1000	SCALE	1:1
VER	MODIFICATION	DRAW	DATE						DWG NO.	009