




PRELIMINARY

SOLID STATE DEVICES, INC.14005 Stage Road * Santa Fe Springs, Ca 90670
Phone: (562) 404-4474 * Fax: (562) 404-1773**DESIGNER'S DATA SHEET****FEATURES:**


- High Current Switching for Motor Drives and Inverters for Aerospace Applications.
- Low Saturation Voltage at High Current.
- Low Mechanical Stress Design.
- Hermetic Construction for Aerospace Applications.
- Excellent Thermal Management.
- Full Power Screened Hermetic Discretes.
- TX, TXV, and S-Level Screening Available.

SPMT6678-01**90 AMP
450 VOLTS
NPN TRANSISTOR
POWER MODULE**

ASPM

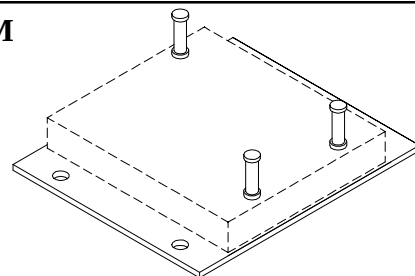

MAXIMUM RATINGS	SYMBOL	VALUE	UNITS
Collector - Emitter Voltage	V_{CEO}	450	Volts
Collector - Base Voltage	V_{CBO}	525	Volts
Emitter - Base Voltage	V_{EBO}	8	Volts
Collector Current	I_C	90	Amps
Base Current	I_B	20	Amps
Emitter - Base Avalanche Energy	$E_{EBOaval}$	52	μJ
Emitter - Base Avalanche Power	$P_{EBOaval}$	1	W
Thermal Resistance, Junction to Base	Θ_{JB}	0.25	$^{\circ}C/W$
Operating and Storage Temperature	T_B and T_{STG}	-55 to 150	$^{\circ}C$
Total Module Power Dissipation @ $T_B = 50^{\circ}C$ ^{1/} Power Derating Above 100 $^{\circ}C$	P_D	400 4	W W/ $^{\circ}C$

^{1/} Subject to SOA Curves. Contact SSDI for Details.**ELECTRICAL SCHEMATIC**

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: PM0004B

SPMT6678-01

PRELIMINARY




SOLID STATE DEVICES, INC.
14005 Stage Road * Santa Fe Springs, Ca 90670
Phone: (562) 404-4474 * Fax: (562) 404-1773

ELECTRICAL CHARACTERISTICS	SYMBOL	MIN	MAX	UNITS
Collector Cutoff Current ($V_{CE} = 525V$, $V_{BE} = -2V$) $T_B = 25^{\circ}C$ $T_B = 125^{\circ}C$	I_{CEV}	-	2.0 10.0	mAmps
Emitter Cutoff Current ($V_{EB} = 8V$)	I_{EBO}	-	5.0	mAmps
DC Current Gain ($I_C = 40A$, $V_{BE} = -2V$) $T_B = 25^{\circ}C$ $T_B = 85^{\circ}C$ $T_B = -55^{\circ}C$	H_{FE}	20.0 18.0 18.0	55 - -	-
Collector - Emitter Saturation Voltage ($I_C = 40A$, $I_B = 3.33A$)	$V_{CE(SAT)}$	-	1.0	Volts
Base - Emitter Saturation Voltage ($I_C = 40A$, $I_B = 6.0A$)	$V_{BE(SAT)}$	-	1.5	Volts
Switch Time ($V_{CC} = 300V$, $I_C = 40A$, $I_{B1} = I_{B2} = 6A$, $T_B = 85^{\circ}C$)	t_{ON} t_S t_F	- - -	1.2 4.0 1.0	μsec
Insulation Resistance (All terminals to Base @1000V)	R_{INSUL1}	1	-	$G\Omega$

*Pulse Test: Pulse Width = 300us, Duty Cycle = 2%

CASE OUTLINE: ASPM

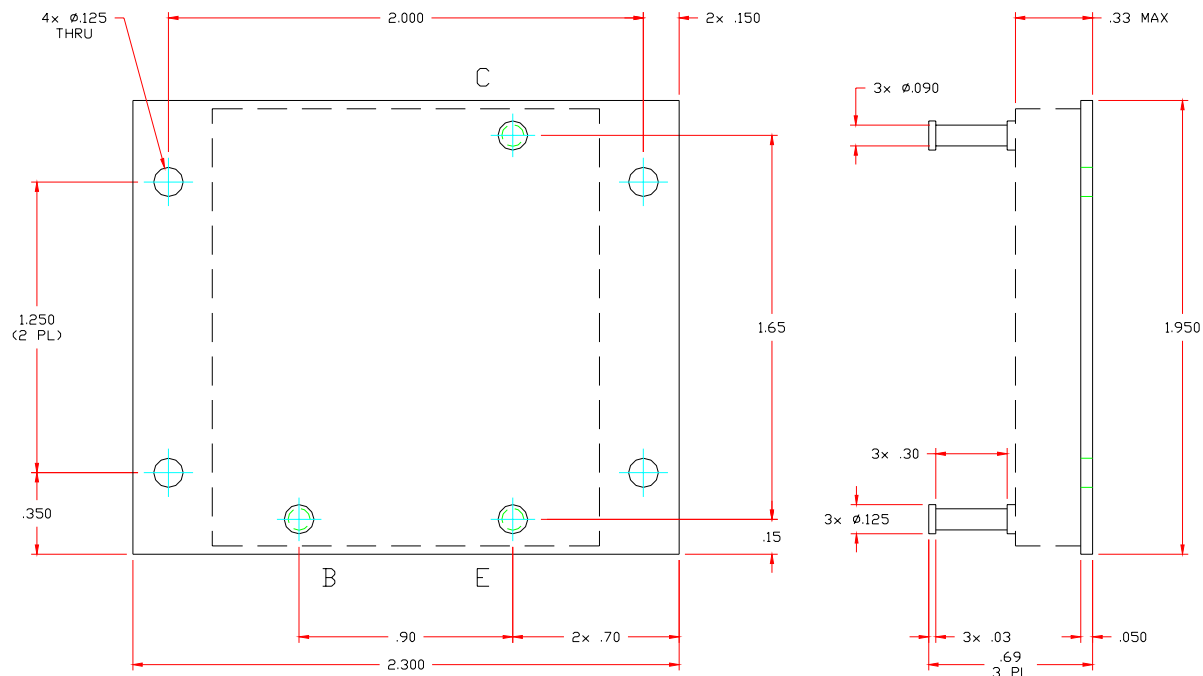

Tolerances
(Unless specified):

.XX $\pm .03$
.XXX $\pm .010$