
This document was generated on 04/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0197114003

Status: Active

Description: PCB Tab Right Angle Quick Disconnect, Male, for Wire, Metal Strip, Tab 6.35mm (.250") x 0.81mm (.032")

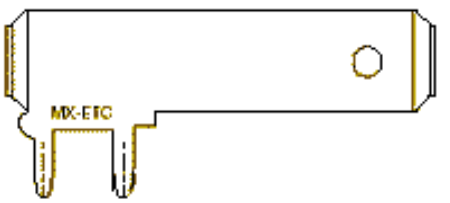

Series image - Reference only

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-19902-010 (PDF)

Agency Certification

UL	E79133

General

Product Family	Quick Disconnects
Series	19711
Crimp Quality Equipment	Yes
Product Name	PCB Tab
Type	Quick Disconnect

Physical

Barrel Type	N/A
Gender	Male
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	None
Material - Metal	Brass
Orientation	PCB Flag Tab
Packaging Type	Reel
Polarized to Mating Part	No
Tab Thickness	0.81mm (.032")
Tab Width	6.35mm (.250")
Wire Insulation Diameter	N/A
Wire Size AWG	N/A

Electrical

Voltage - Maximum	N/A

Material Info

Reference - Drawing Numbers

Product Specification	PS-19902-010
Sales Drawing	SD-19711-400

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.


Search Parts in this Series
19711Series


This document was generated on 04/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


19711


MATERIAL NUMBER	ENGINEERING NUMBER	CARRIER
197114003	19711-4003	STRIP
197114007	19711-4007	

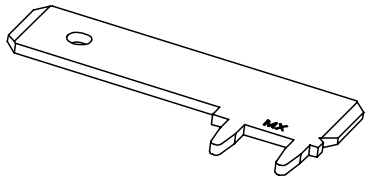

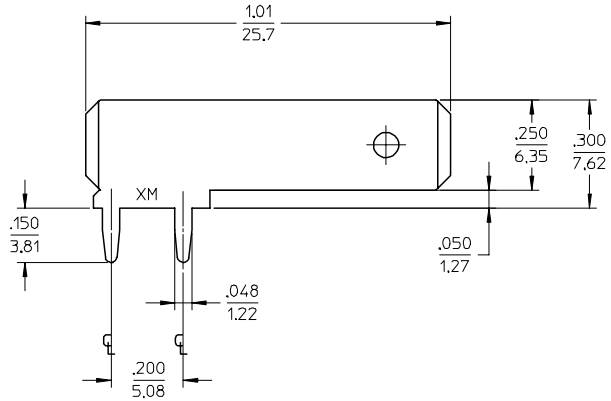

RECOMMENDED PCB HOLE LAYOUT

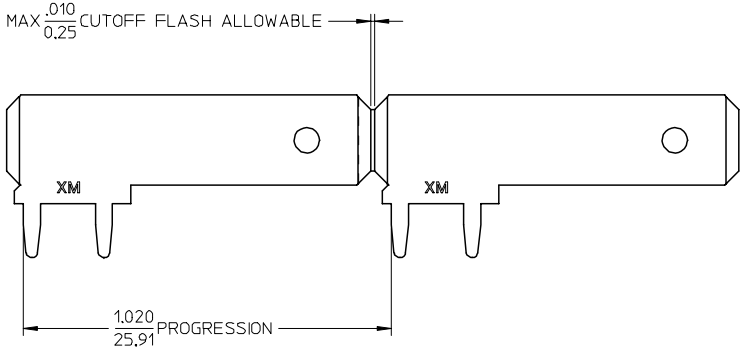

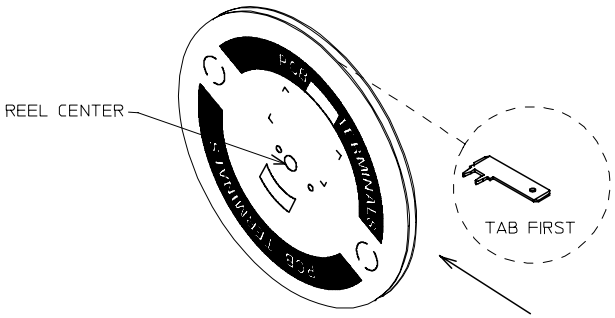

NOTES:

1. BARE EDGES PERMISSIBLE AT CARRIER CUT OFF.
2. MATERIAL: BRASS C26000 (.032/0.81) THICK
3. TAB CONFORMS TO NEMA SPECIFICATIONS.
4. ALL DIMENSIONS AND NOTES REFERENCE UNLESS OTHERWISE NOTED.
(G) 5. PLATING: MATTE TIN, 150µIN/3.81 µmm MINIMUM THICKNESS OVER NICKEL 50µIN/1.25µmm MINIMUM THICKNESS.
6. REF.: 5,000 MINIMUM PARTS PER REEL, REEL HAS 24" DIAMETER REEL WITH A 1.25" DIAMETER CENTER HOLE.

EC NO: ETC2003-0292
DRWN:DMYRICK 2004/05/13
CH'KD:H.BEITZE 2004/05/14
APPR:RDEROSS 2004/05/14
DESCRIPTION
REV
G

QUALITY SYMBOLS
▼- 0
▽- 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SCALE 4:1
DESIGN UNITS INCH
DIMENSION STYLE IN/MM
THIRD ANGLE PROJECTION
REVISE ON CAD ONLY

DRAWN BY EDB DATE 11/08/96
CHECKED BY JH DATE 11/08/96
APPROVED BY RWD DATE 11/08/96

TITLE
QUICK DISCONNECT
PCB MOUNTABLE
.250 X .032 TAB

molex MOLEX INCORPORATED

MATERIAL NO. SEE CHART
DOCUMENT NO. SD-19711-400
SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

C

tb_frame_C-B1
rev. B1 2000/08/01