Ordering number :EN5345

SVC344

Sillicon Diffused Junction Type

Varactor Diode

for AM Low-Voltage Electronic Tuning

Features


- Twin type varactor diode for low-voltage AM electronic tuning applivations.
- Low operating voltage (≤4.5V).
- High Q.

Package Dimensions

unit:mm

1271

[SVC344]

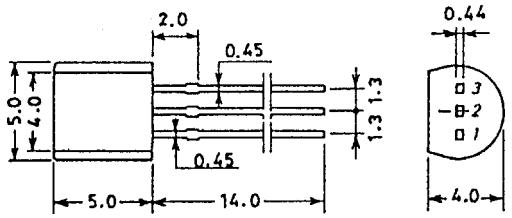

JEDEC:TO-92	1:Anode
EIAJ:SC-43	2:Cathode
SANYO:NP	3:Anode

Specifications

Absolute Maximum Ratings at Ta = 25˚C

Parameter	Symbol	Conditions	Ratings	Unit
Reverse Voltage	V_R		30	V
Junction Temperature	Tj		125	˚C
Storage Temperature	Tstg		–55 to +125	˚C

Electrical Characteristics at Ta = 25˚C


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Breakdown Voltage	$V_{(BR)R}$	I_R=10μA	30			V
Reverse Current	I_R	V_R=20V			100	nA
Interterminal Capacitance*1	$C_{1.0V}$	V_R=1.0V, f=1MHz*2	410.0	430.0	445.0	pF
	$C_{3.0V}$	V_R=3.0V, f=1MHz	70.0	95.0	120.0	pF
	$C_{4.5V}$	V_R=4.5V, f=1MHz	210.0	23.5	26.0	pF
Quality Factor	Q	V_R=1.0V, f=1MHz	200			
Capacitance Ratio	CR	$C_{1.0V}/C_{4.5V}$	15.0			
Matching Tolerance*3	ΔC_m1	V_R=1.0V, f=1MHz			2.0	%
	ΔC_m2	V_R=3.0V, f=1MHz			3.0	%
	ΔC_m3	V_R=4.5V, f=1MHz			3.0	%

Note)*1:The value of interterminal capacitance represent the average of mesurements for tow elements.


Note)*2:1MHz signal:20mVrms

Note)*3:$\Delta C_m=(C_{max}-C_{min})/C_{min}\times 100$ Between D1 and D2


Electrical Connection



C, Q — V_R

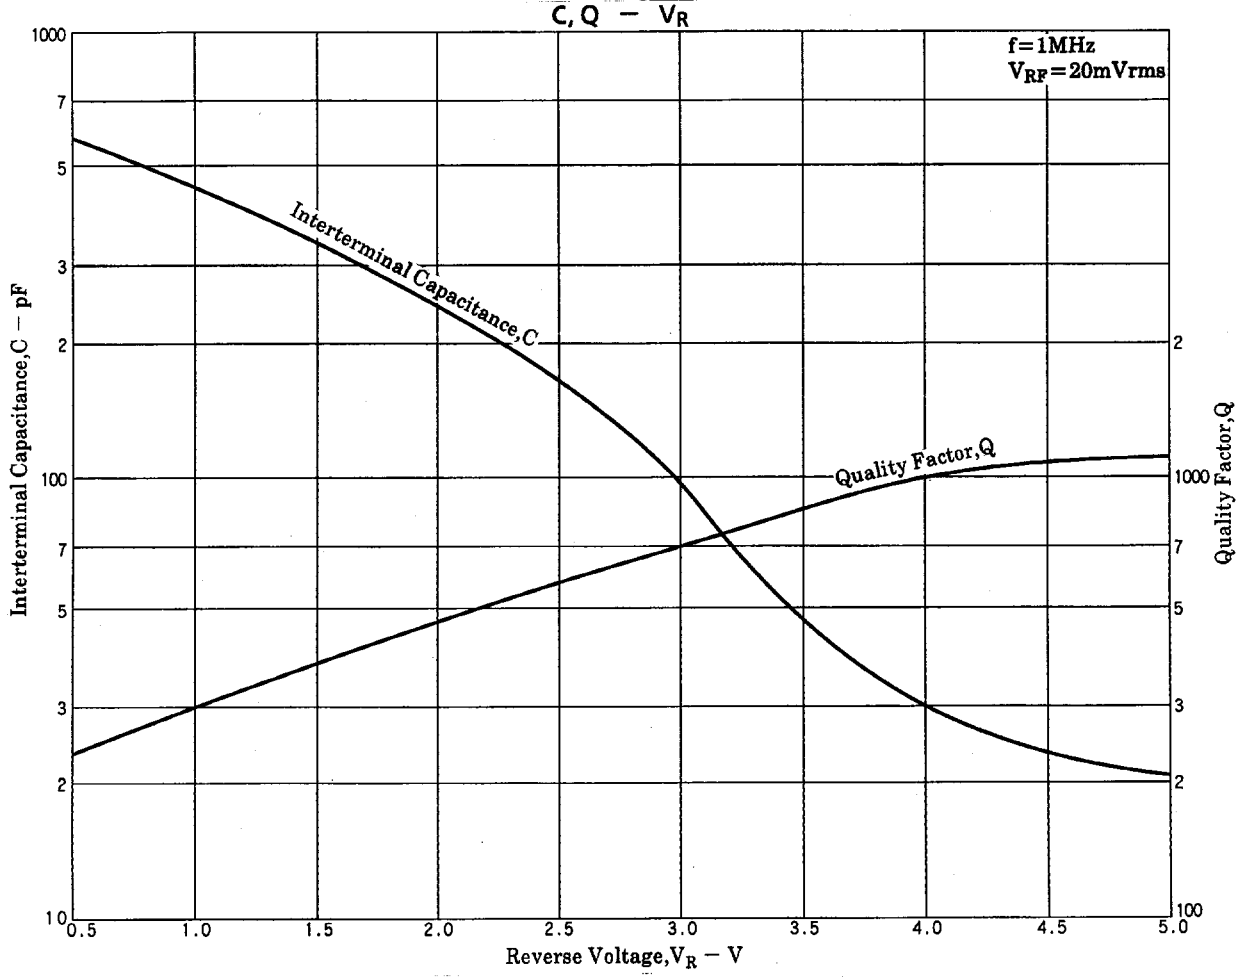
f=1MHz
V_{RF}=20mVrms
Interterminal Capacitance,C
Quality Factor,Q
Interterminal Capacitance,C — pF
Quality Factor,Q
Reverse Voltage,V_R — V
1000
7
5
3
2
100
7
5
3
2
10
2
1000
7
5
3
2
100
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
4.5
5.0

C — Ta

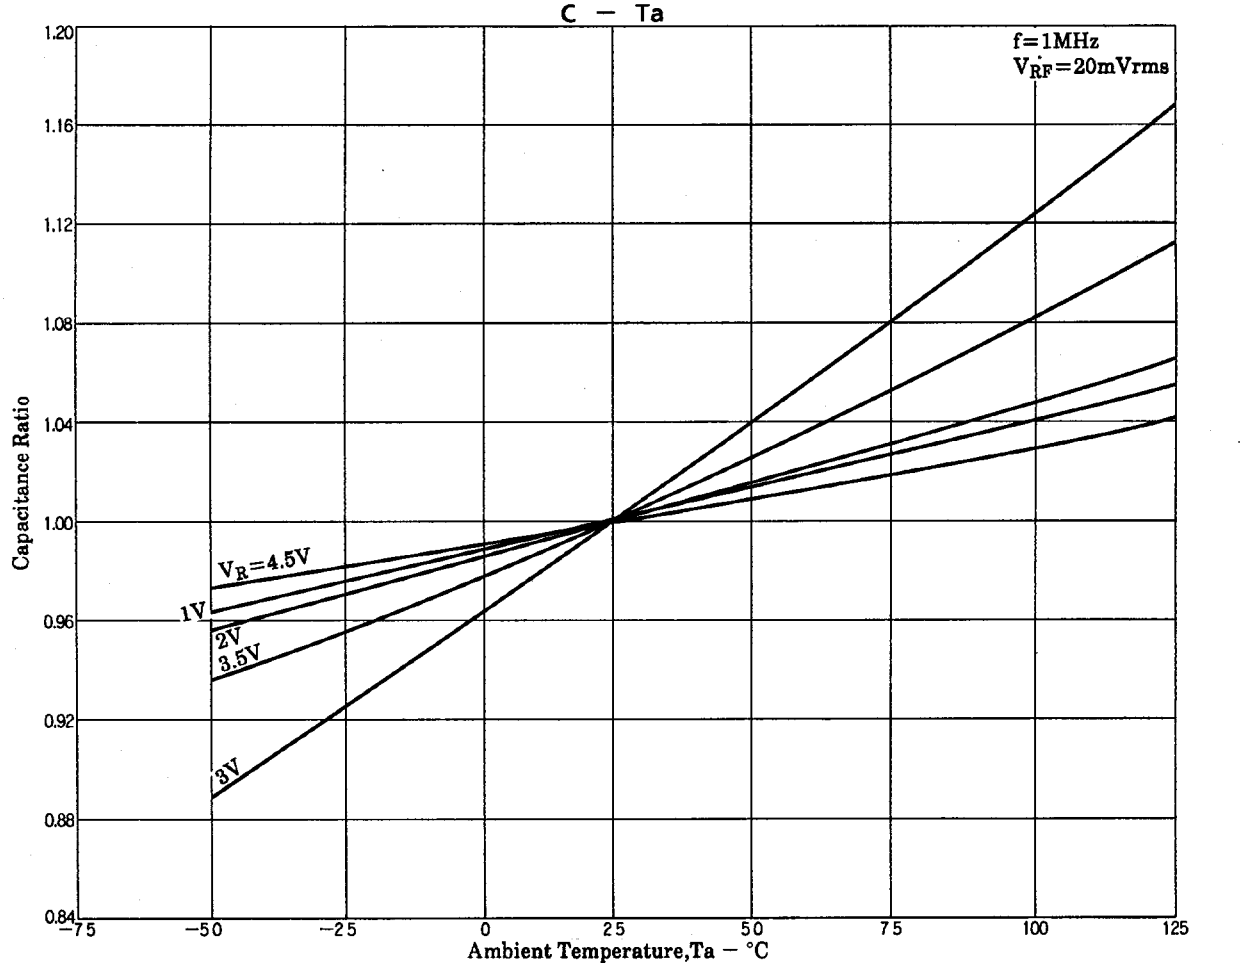
f=1MHz
V_{RF}=20mVrms
V_R=4.5V
1V
2V
3.5V
3V
Capacitance Ratio
Ambient Temperature,Ta — °C
1.20
1.16
1.12
1.08
1.04
1.00
0.96
0.92
0.88
0.84
−75
−50
−25
0
25
50
75
100
125

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1998. Specifications and information herein are subject to change without notice.