

isc Silicon PNP Power Transistors


TIP30D

DESCRIPTION

- DC Current Gain-
: $h_{FE} = 20(\text{Min}) @ I_C = -0.2A$
- Collector-Emitter Sustaining Voltage-
: $V_{CEO(\text{SUS})} = -120V(\text{Min})$
- Complement to Type TIP29D

APPLICATIONS

- Designed for use in general purpose amplifier and switching applications.

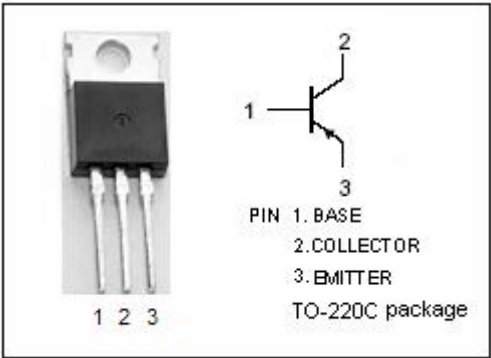


ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-base Voltage	-160	V
V_{CEO}	Collector-emitter Voltage	-120	V
V_{EBO}	Emitter-base Voltage	-5	V
I_C	Collector Current-Continuous	-1	A
I_{CM}	Collector Current-Pulse	-3	A
I_B	Base Current	-0.4	A
P_c	Collector Power Dissipation $T_c=25^{\circ}\text{C}$	30	W
	Collector Power Dissipation $T_a=25^{\circ}\text{C}$	2	
T_j	Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Ttemperature Range	-65~150	$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	4.17	$^{\circ}\text{C/W}$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	62.5	$^{\circ}\text{C/W}$

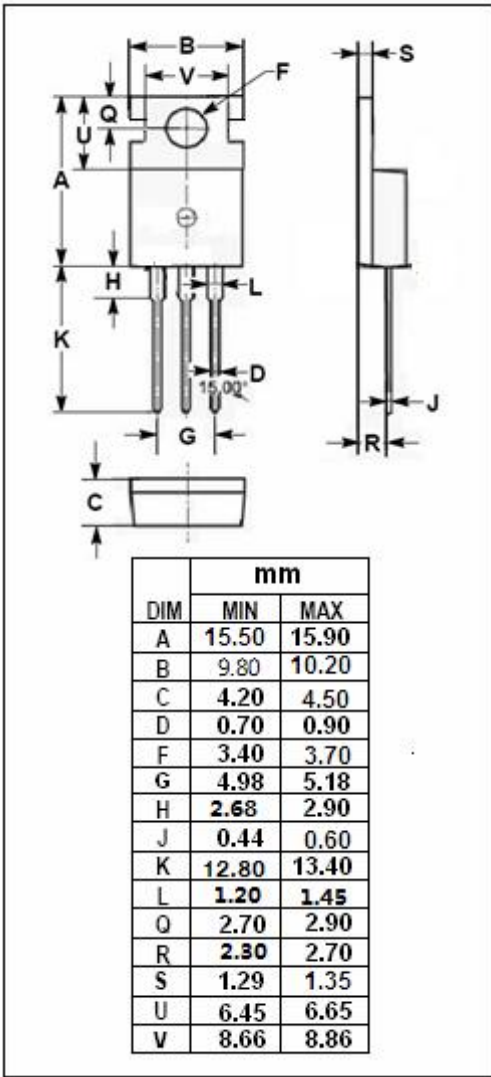

isc Silicon PNP Power Transistors**TIP30D****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = -30\text{mA}; I_B = 0$	-120		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -1\text{A}; I_B = -0.125\text{A}$		-0.7	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = -1\text{A}; V_{CE} = -4\text{V}$		-1.3	V
I_{CES}	Collector Cutoff Current	$V_{CE} = -160\text{V}; V_{BE} = 0$		-0.2	mA
I_{CEO}	Collector Cutoff Current	$V_{CE} = -120\text{V}; I_B = 0$		-0.3	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -5\text{V}; I_C = 0$		-1.0	mA
h_{FE-1}	DC Current Gain	$I_C = -0.2\text{A}; V_{CE} = -4\text{V}$	40		
h_{FE-2}	DC Current Gain	$I_C = -1\text{A}; V_{CE} = -4\text{V}$	15		
f_T	Current-Gain—Bandwidth Product	$I_C = -0.2\text{A}; V_{CE} = -10\text{V}$	3		MHz