SHINDENGEN

Schottky Rectifiers (SBD)

Dual

D5SC4M

40V 5A

FEATURES

- Tj150℃
- P_{RRSM} avalanche guaranteed
- Fully Isolated Molding


APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

Case : ITO-220

Unit : mm

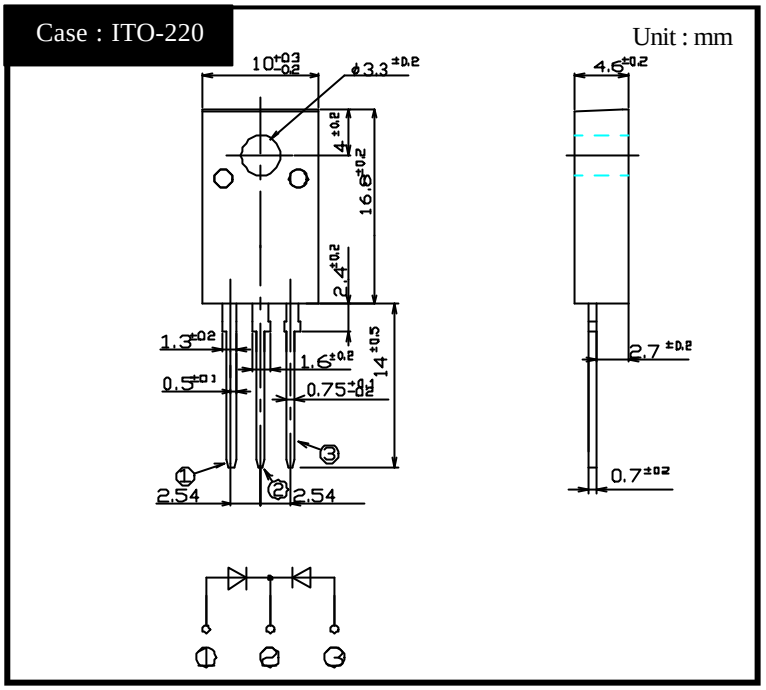

RATINGS

●Absolute Maximum Ratings (If not specified Tc=25℃)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40～150	℃
Operating Junction Temperature	Tj		150	℃
Maximum Reverse Voltage	V_{RM}		40	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	Io	50Hz sine wave, R-load, Rating for each diode Io/2, Tc=136℃	5	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=125℃	50	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10μs, Rating of per diode, Tj=25℃	330	W
Dielectric Strength	Vdis	Terminals to case, AC 1 minute	1.5	kV
Mounting Torque	TOR	(Recommended torque :0.3N･m)	0.5	N･m


●Electrical Characteristics (If not specified Tc=25℃)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	I_F=2.5A, Pulse measurement, Rating of per diode	Max.0.55	V
Reverse Current	I_R	V_R=V_{RM}, Pulse measurement, Rating of per diode	Max.2.5	mA
Junction Capacitance	Cj	f=1MHz, V_R=10V, Rating of per diode	Typ.116	pF
Thermal Resistance	θjc	junction to case	Max.3.3	℃/W

Copyright & Copy;2000 Shindengen Electric Mfg.Co.Ltd


D5SC4M Forward Voltage

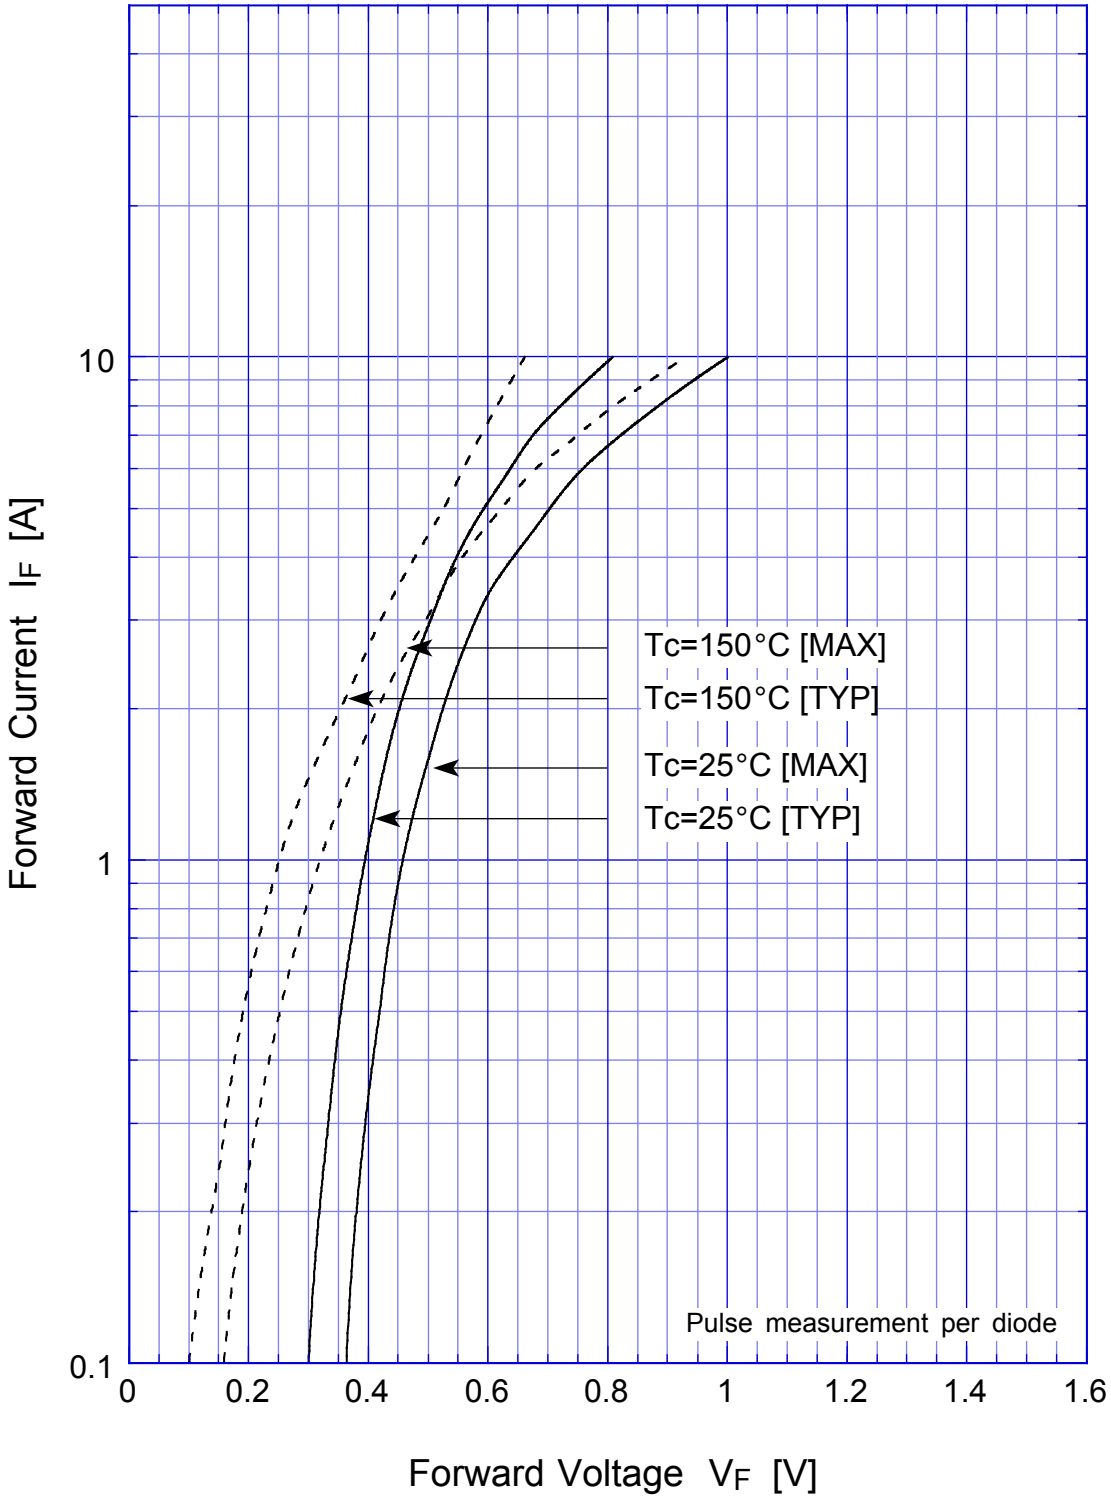


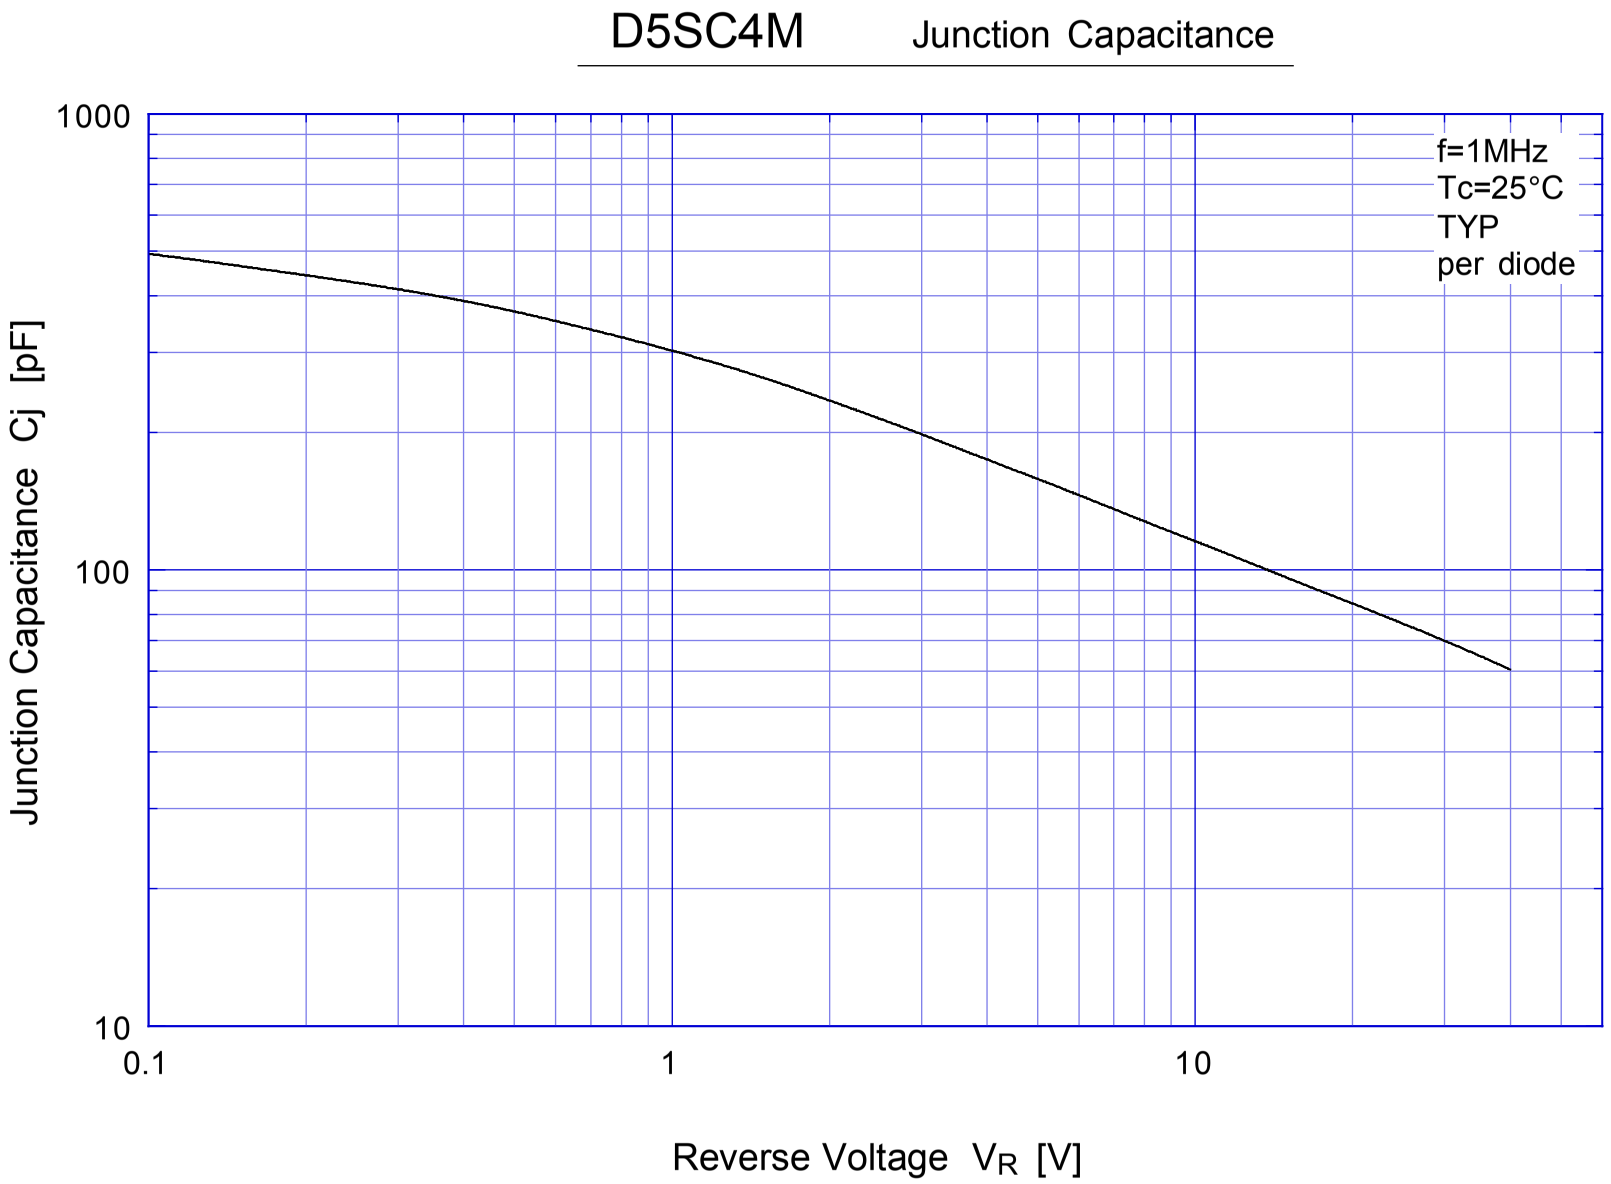
D5SC4M
Junction Capacitance
f=1MHz
Tc=25°C
TYP
per diode
1000
100
10
0.1
1
10
Junction Capacitance Cj [pF]
Reverse Voltage VR [V]

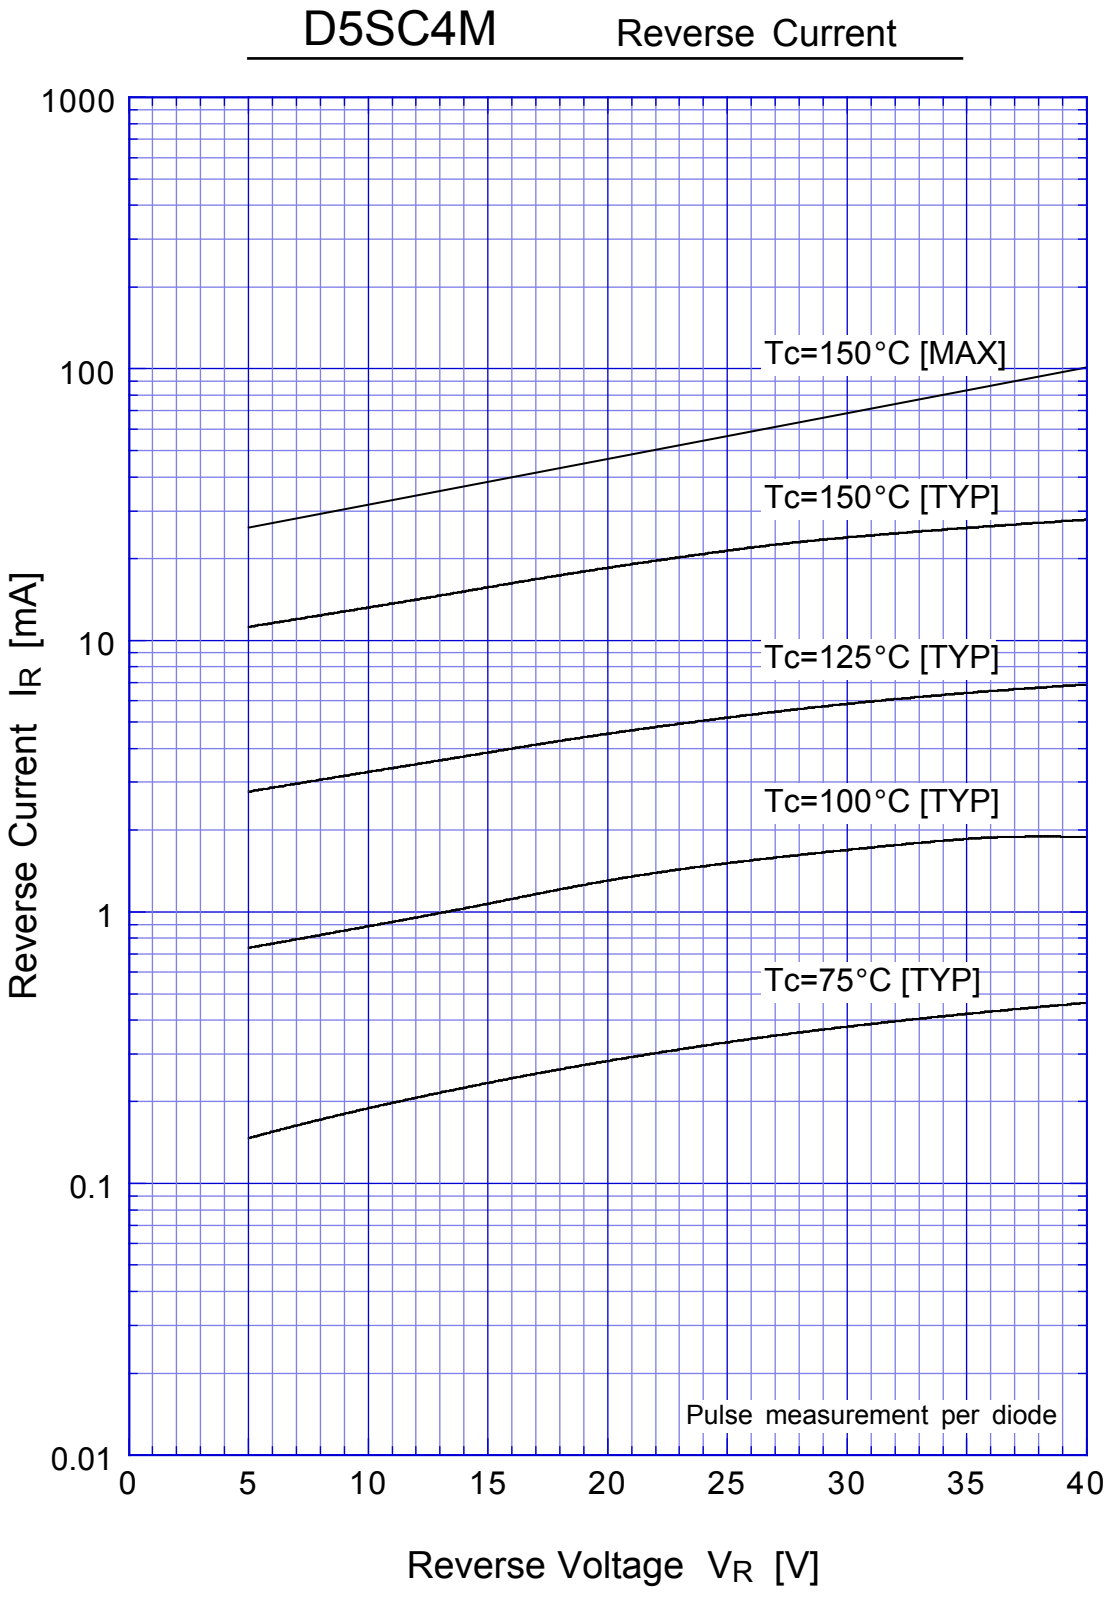

D5SC4M
Reverse Current
1000
100
10
1
0.1
0.01
Reverse Current IR [mA]
Tc=150°C [MAX]
Tc=150°C [TYP]
Tc=125°C [TYP]
Tc=100°C [TYP]
Tc=75°C [TYP]
Pulse measurement per diode
0
5
10
15
20
25
30
35
40
Reverse Voltage VR [V]


D5SC4M Reverse Power Dissipation

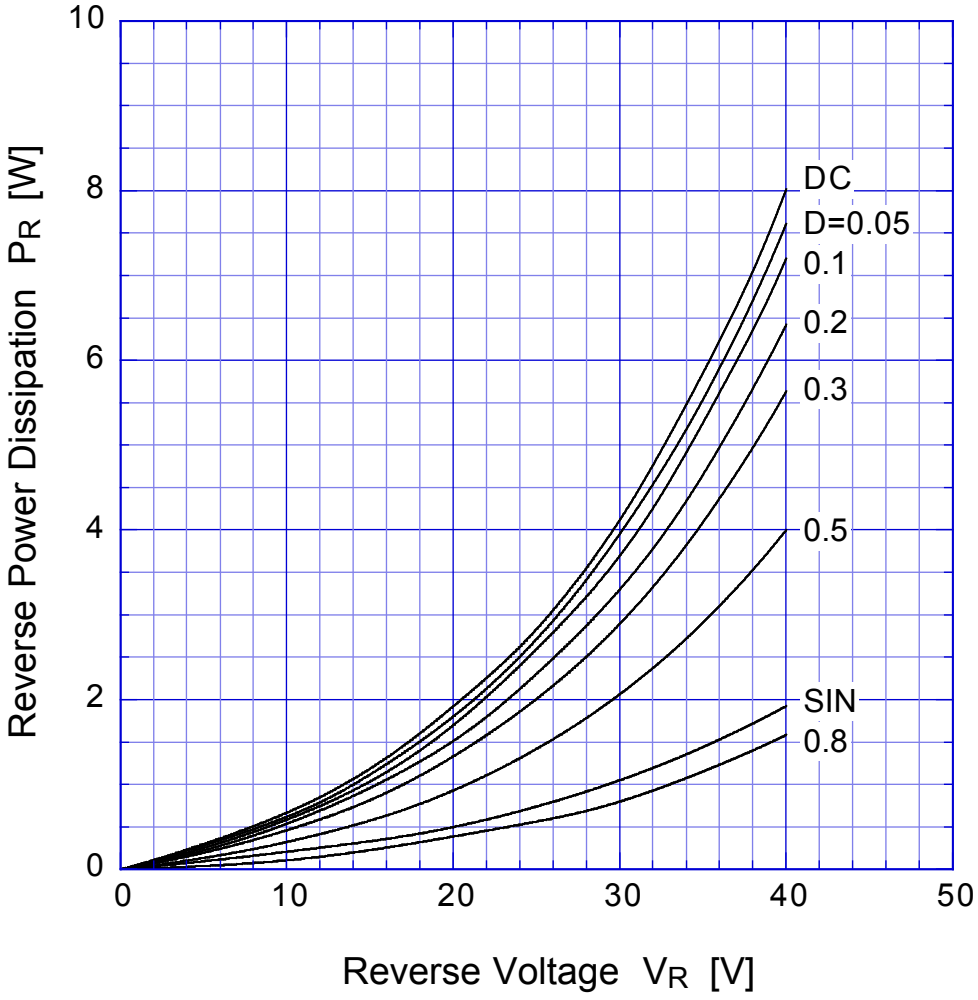

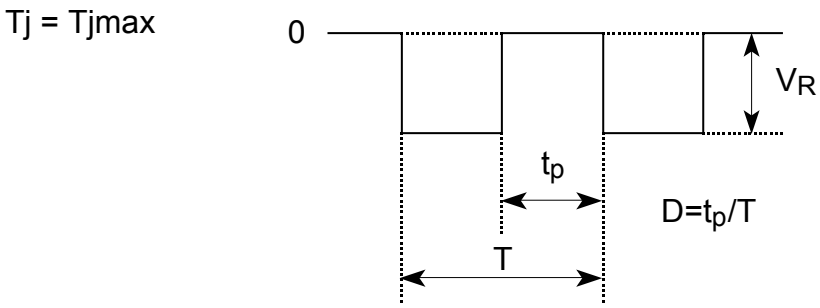


D5SC4M Forward Power Dissipation

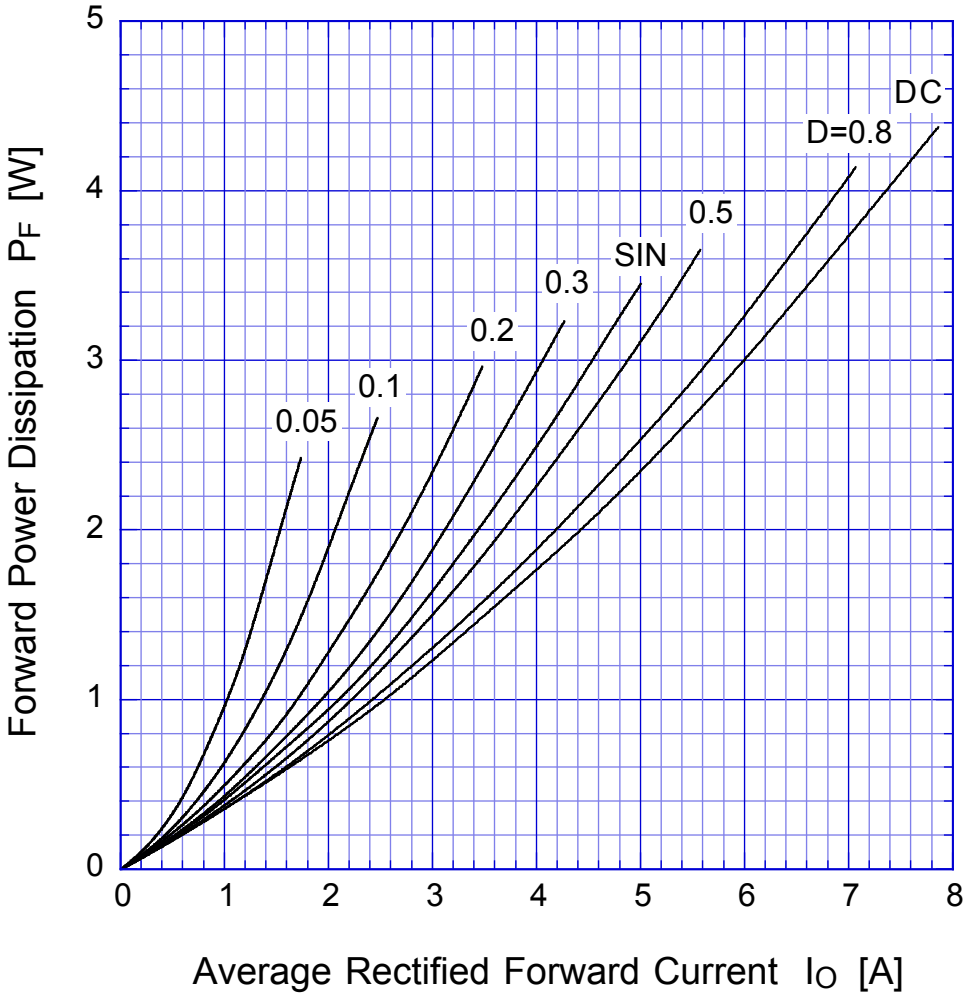


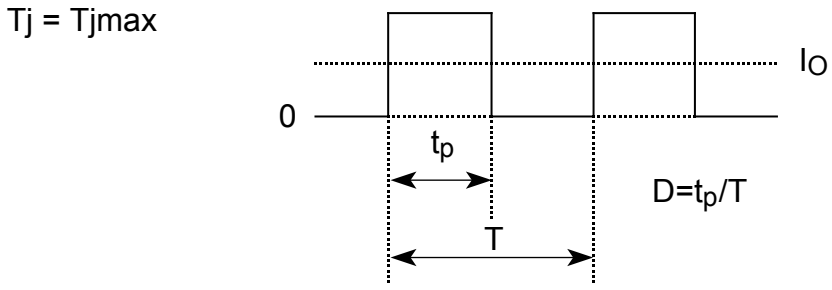


D5SC4M Derating Curve

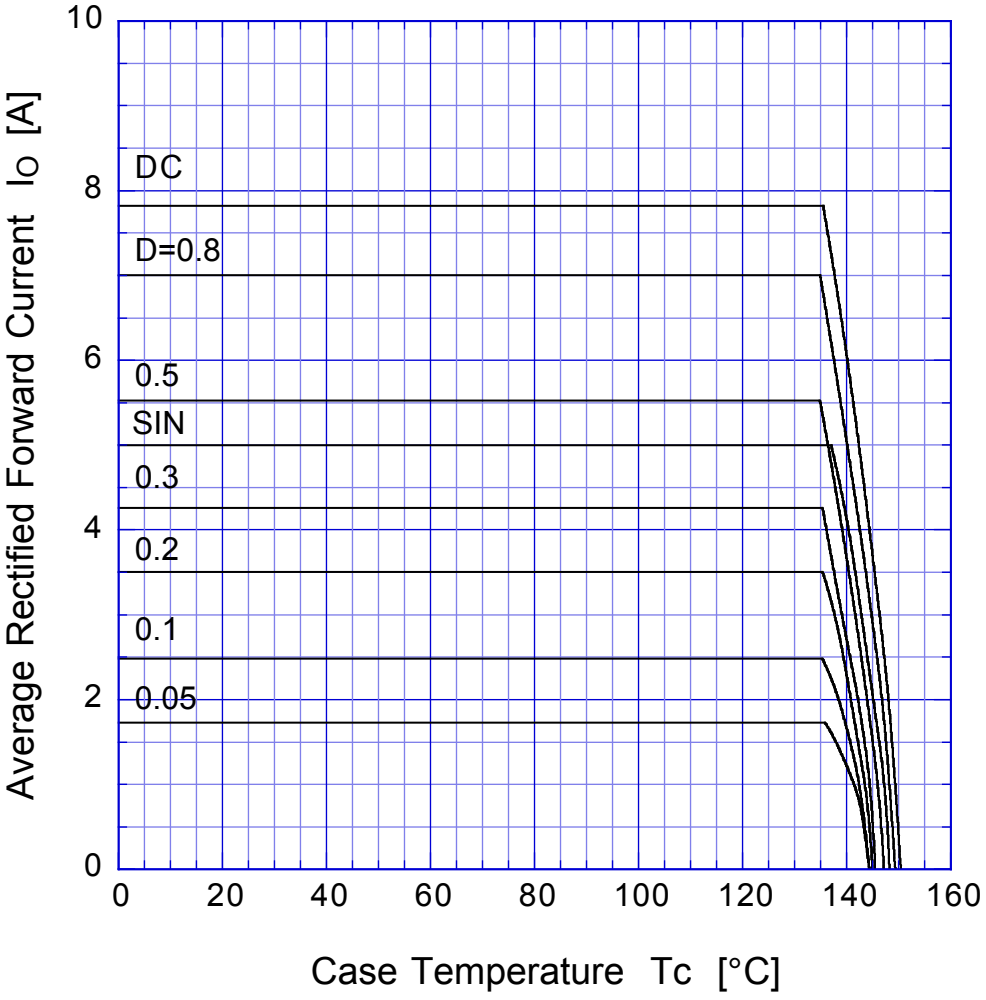


$V_R = V_{RM}/2$

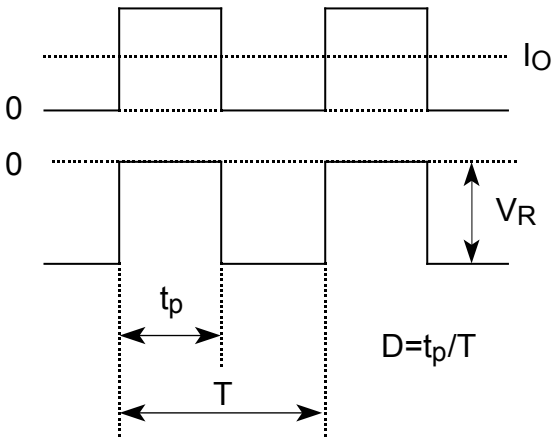


D5SC4M Derating Curve

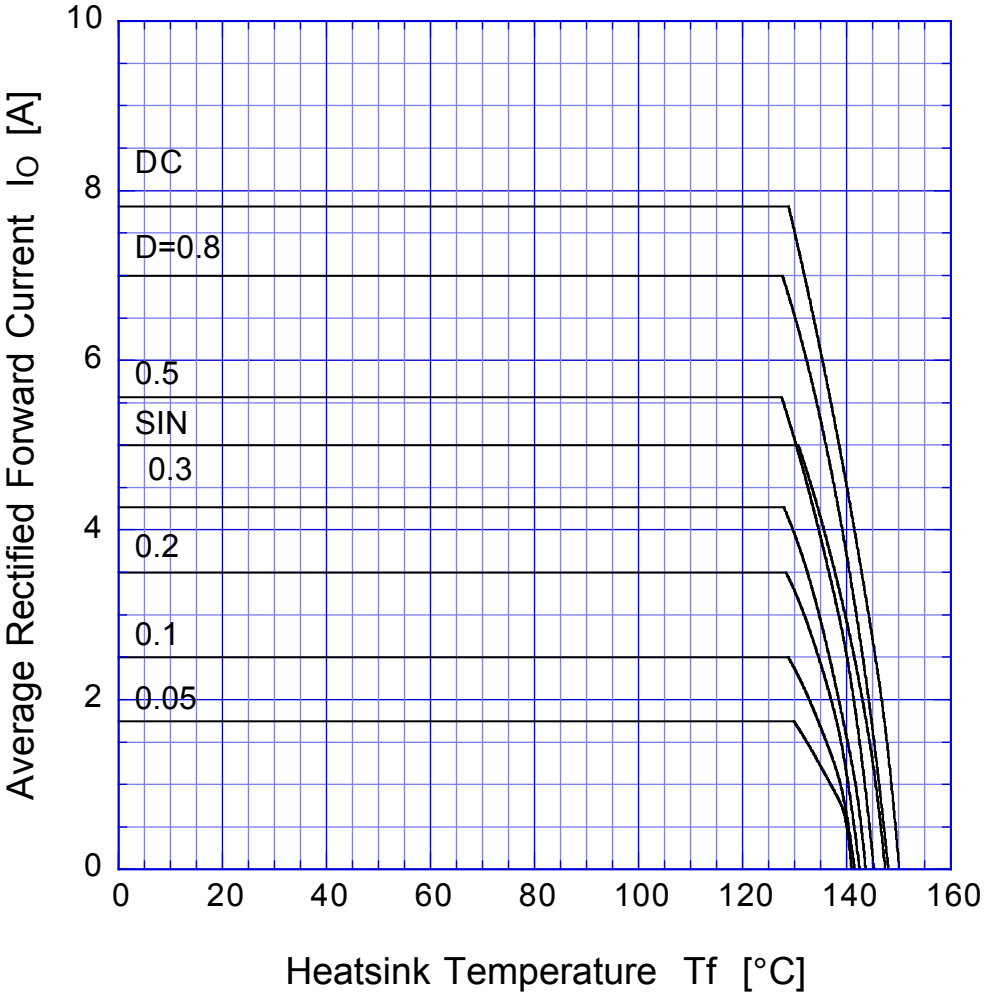


$V_R = V_{RM}/2$

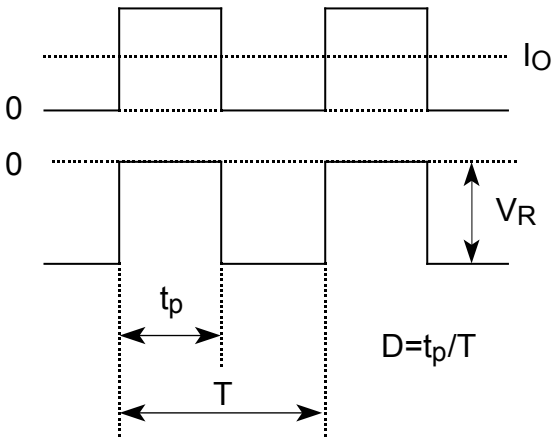


D5SC4M Peak Surge Forward Capability

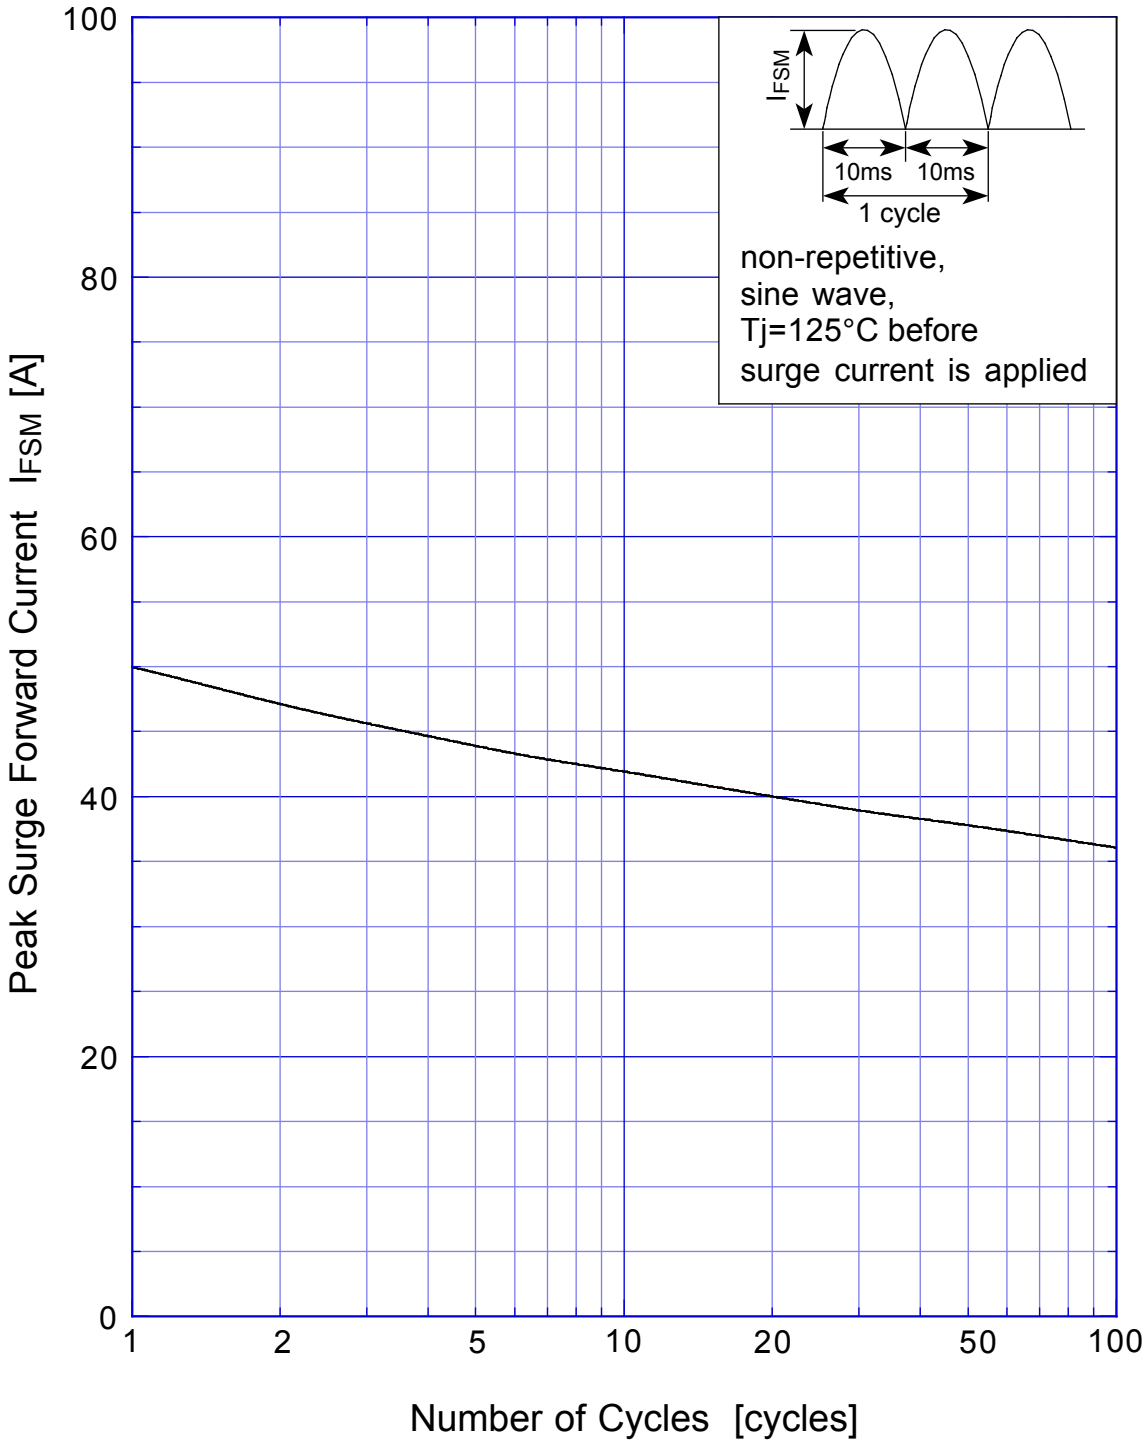

SBD Repetitive Surge Reverse Power Derating Curve

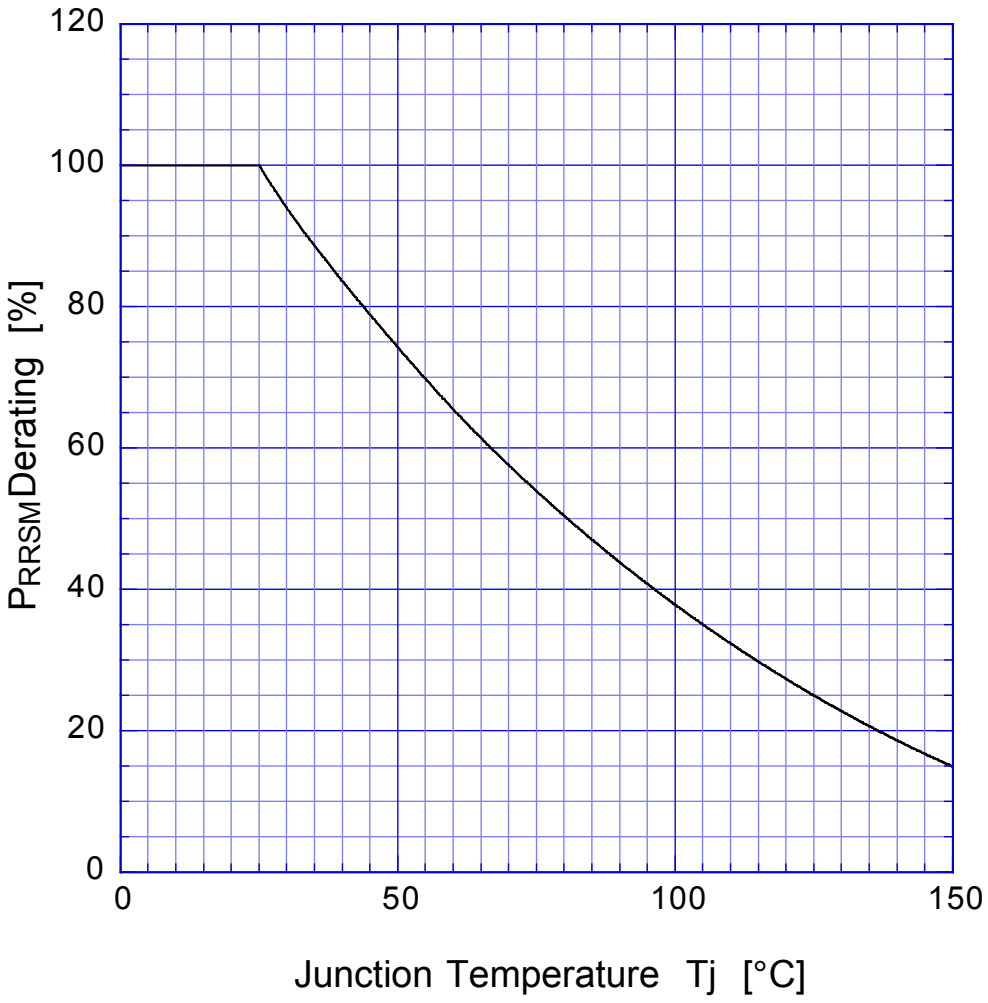

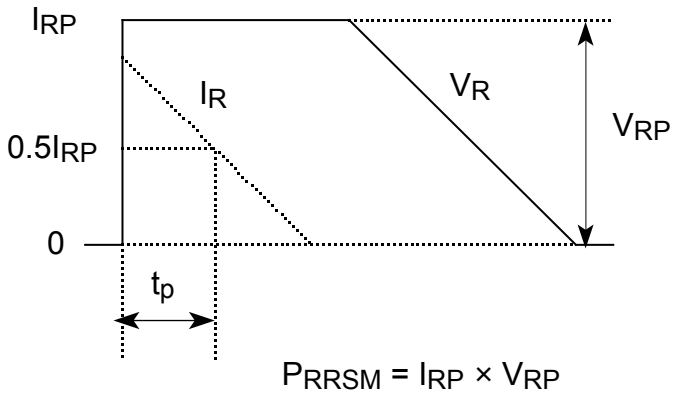

SBD Repetitive Surge Reverse Power Capability

