



Micro Commercial Components



Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# SMBJ5913B THRU SMBJ5942B

## 1.5 Watt Surface Mount Silicon Zener Diodes

### Features

- Surface Mount Application
- 3.3 thru 51 Volt Voltage Range
- Low Inductance, Low Profile Mounting
- Glass Passivated Junction
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)

### Mechanical Data


- CASE: JEDEC DO-214AA molded Surface Mountable
- Terminals solderable per MIL-STD-750, Method 2026
- Polarity is indicated by cathode band.
- Packaging: Standard 12mm Tape (see EIA 481)
- Maximum temperature for soldering: 260°C for 10 seconds.
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

### Maximum Ratings @ 25°C Unless Otherwise Specified

Output Current	I <sub>F</sub>	200mA	
Maximum Forward Voltage	V <sub>F</sub>	1.5V	(Note: 2)
Steady State Power Dissipation	P <sub>(AV)</sub>	1.5W	(Note: 3)
Operation And Storage Temperature	T <sub>J</sub> , T <sub>STG</sub>	-55°C to +150 °C	


- NOTES:
1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.
  2. Forward Current @ 200mA.
  3. Mounted on 5.0mm<sup>2</sup> (1oz thick) land areas.  
Lead temperature at T<sub>L</sub>=75°C

### DO-214AA (SMB) (LEAD FRAME)

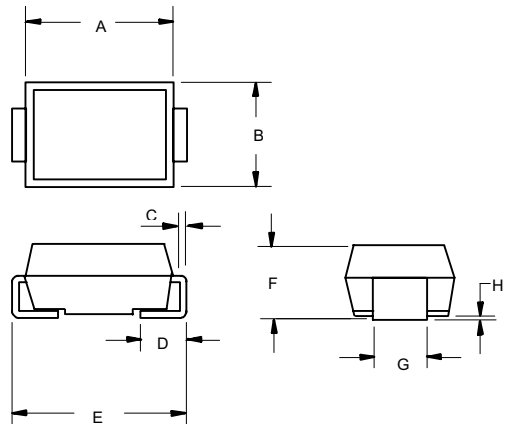

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.160	.185	4.06	4.70	
B	.130	.155	3.30	3.94	
C	.006	.012	0.15	0.31	
D	.030	.060	0.76	1.52	
E	.200	.220	5.08	5.59	
F	.079	.096	2.00	2.44	
G	.075	.087	1.91	2.21	
H	.002	.008	0.05	0.203	

### SUGGESTED SOLDER PAD LAYOUT

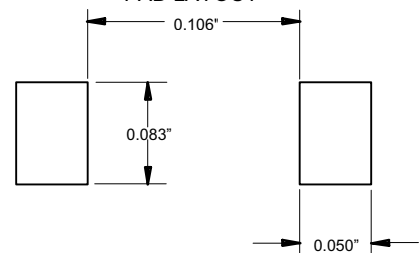

## SMBJ5913B THRU SMBJ5942B

ELECTRICAL CHARACTERISTICS(TL=30 centigrade unless otherwise noted) (VF=1.5Volts Max @IF=200mAdc for all types).

MCC PART NUMBER	ZENER VOLTAGE $V_z$ (*)	TEST CURRENT $I_{ZT}$	MAXIMUM DYNAMIC IMPEDANCE $Z_{ZT} @ I_{ZT}$	KNEE CURRENT $I_{ZK}$	KNEE IMPEDANCE $Z_{ZK}$	MAXIMUM REVERSE CURRENT $I_R$	REVERSE VOLTAGE $V_R$	DEVICE MARKING
	VOLTS	mA	OHMS	mA	OHMS	$\mu A$	VOLTS	
SMBJ5913B	3.3	113.6	10.0	1.0	500	50.0	1.0	913B
SMBJ5914B	3.6	104.2	9.0	1.0	500	35.5	1.0	914B
SMBJ5915B	3.9	96.1	7.5	1.0	500	12.5	1.0	915B
SMBJ5916B	4.3	87.2	6.0	1.0	500	2.5	1.0	916B
SMBJ5917B	4.7	79.8	5.0	1.0	500	2.5	1.5	917B
SMBJ5918B	5.1	73.5	4.0	1.0	350	2.5	2.0	918B
SMBJ5919B	5.6	66.9	2.0	1.0	250	2.5	3.0	919B
SMBJ5920B	6.2	60.5	2.0	1.0	200	2.5	4.0	920B
SMBJ5921B	6.8	55.1	2.5	1.0	200	2.5	5.2	921B
SMBJ5922B	7.5	50.0	3.0	0.5	400	2.5	6.0	922B
SMBJ5923B	8.2	45.7	3.5	0.5	400	2.5	6.5	923B
SMBJ5924B	9.1	41.2	4.0	0.5	500	2.5	7.0	924B
SMBJ5925B	10	37.5	4.5	0.25	500	0.5	8.0	925B
SMBJ5926B	11	34.1	5.5	0.25	550	0.5	8.4	926B
SMBJ5927B	12	31.2	6.5	0.25	550	0.5	9.1	927B
SMBJ5928B	13	28.8	7.0	0.25	550	0.5	9.9	928B
SMBJ5929B	15	25.0	9.0	0.25	600	0.5	11.4	929B
SMBJ5930B	16	23.4	10.0	0.25	600	0.5	12.2	930B
SMBJ5931B	18	20.8	12.0	0.25	650	0.5	13.7	931B
SMBJ5932B	20	18.7	14.0	0.25	650	0.5	15.2	932B
SMBJ5933B	22	17.0	17.5	0.25	650	0.5	16.7	933B
SMBJ5934B	24	15.6	19.0	0.25	700	0.5	18.2	934B
SMBJ5935B	27	13.9	23.0	0.25	700	0.5	20.6	935B
SMBJ5936B	30	12.5	28.0	0.25	750	0.5	22.8	936B
SMBJ5937B	33	11.4	33.0	0.25	800	0.5	25.1	937B
SMBJ5938B	36	10.4	38.0	0.25	850	0.5	27.4	938B
SMBJ5939B	39	9.6	45.0	0.25	900	0.5	29.7	939B
SMBJ5940B	43	8.7	53.0	0.25	950	0.5	32.7	940B
SMBJ5941B	47	8.0	67.0	0.25	1000	1.0	35.8	941B
SMBJ5942B	51	7.3	70.0	0.25	1100	1.0	38.8	942B

\* TOLERANCE AND VOLTAGE DESIGNATION Tolerance designation - The type numbers listed indicate a tolerance of +/-5%

### RATING AND CHARACTERISTICS CURVES

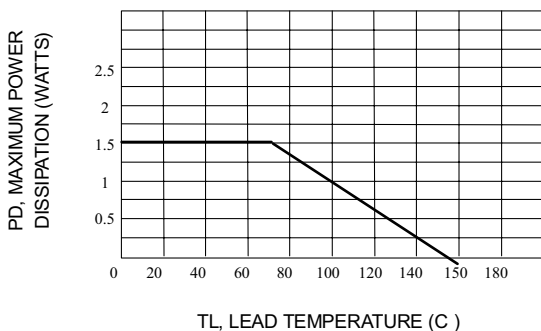


Fig. 1-STEADY STATE POWER DERATING

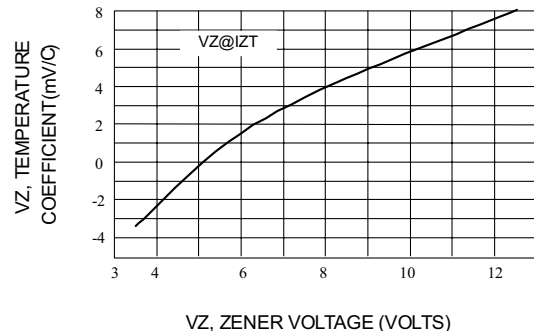


Fig. 2-ZENER VOLTAGE-TO 12 VOLTS

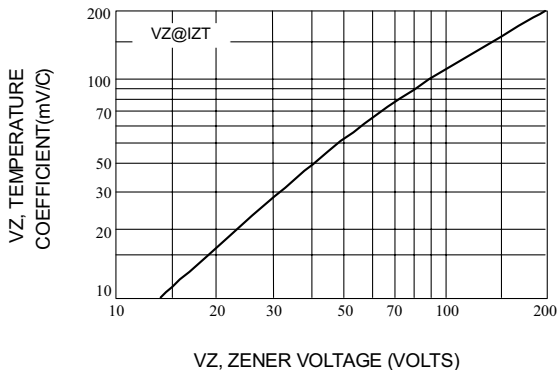


Fig. 3-ZENER VOLTAGE-10 TO 200 VOLTS

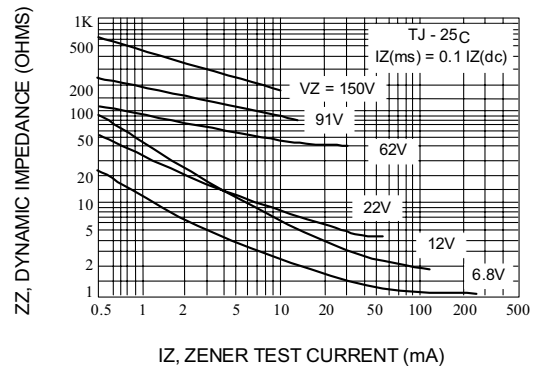


Fig. 4-EFFECT OF ZENER CURRENT



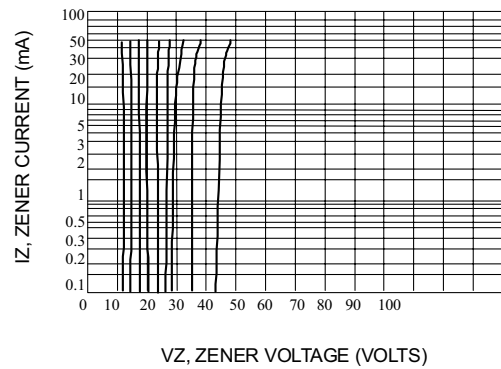


Fig. 7-VZ = 12 THRU 40 VOLTS

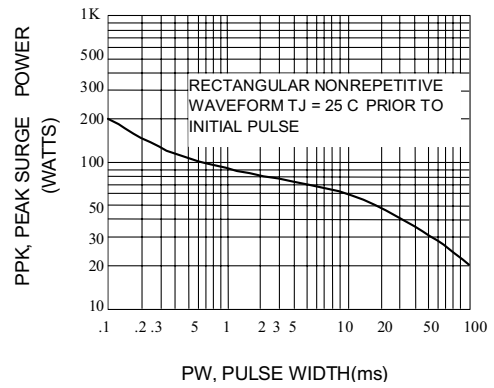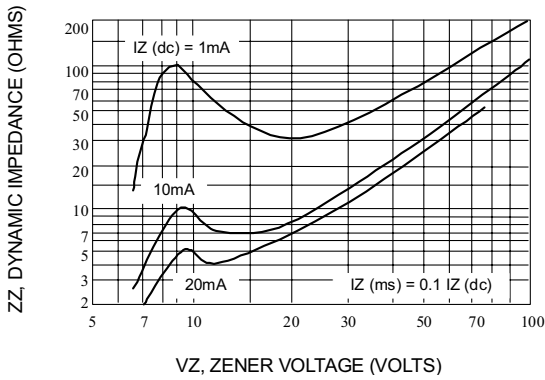

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

**\*\*\*IMPORTANT NOTICE\*\*\***

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.