MRF426


The RF Line NPN Silicon Power Transistor
25W(PEP), 30MHz, 28V

M/A-COM Products
Released - Rev. 05202009

Designed for high gain driver and output linear amplifier stages in 1.5 to 30 MHz HF/SSB equipment.

- Specified 28 V, 30 MHz characteristics —
  - Output power = 25 W (PEP)
  - Minimum gain = 22 dB
  - Efficiency = 35%
- Intermodulation distortion @ 25 W (PEP) —IMD = –30 dB (max)
- 100% tested for load mismatch at all phase angles with 30:1 VSWR
- Class A and AB characterization
- BLX 13 equivalent

Product Image



CASE 211–07, STYLE 1

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	35	Vdc
Collector–Base Voltage	V_{CBO}	65	Vdc
Emitter–Base Voltage	V_{EBO}	4.0	Vdc
Collector Current — Continuous	I_C	3.0	Adc
Withstand Current — 5 s	—	6.0	Adc
Total Device Dissipation @ T_C = 25°C (1) Derate above 25°C	P_D	70 0.4	Watts W/°C
Storage Temperature Range	T_{stg}	–65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.5	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage (I_C = 50 mAdc, I_B = 0)	$V_{(BR)CEO}$	35	—	—	Vdc
Collector–Base Breakdown Voltage (I_C = 50 mAdc, I_E = 0)	$V_{(BR)CBO}$	65	—	—	Vdc
Emitter–Base Breakdown Voltage (I_E = 10 mAdc, I_C = 0)	$V_{(BR)EBO}$	4.0	—	—	Vdc
Collector Cutoff Current (V_{CE} = 28 Vdc, V_{BE} = 0)	I_{CES}	—	—	10	mAdc

NOTE: (continued)

1. This device is designed for RF operation. The total device dissipation rating applies only when the device is operated as an RF amplifier.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
ON CHARACTERISTICS					
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	10	35	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 30 Vdc, I_E = 0, f = 1.0 MHz)	C_{ob}	—	60	80	pF
FUNCTIONAL TESTS (SSB)					
Common–Emitter Amplifier Gain (V_{CC} = 28 Vdc, P_{out} = 25 W (PEP), f1 = 30 MHz, f2 = 30.001 MHz, I_{CQ} = 25 mA)	G_{PE}	22	25	—	dB
Collector Efficiency (V_{CC} = 28 Vdc, P_{out} = 25 W (PEP), f1 = 30 MHz, f2 = 30.001 MHz, I_{CQ} = 25 mA)	η	35	—	—	%
Intermodulation Distortion (2) (V_{CC} = 28 Vdc, P_{out} = 25 W (PEP), f1 = 30 MHz, f2 = 30.001 MHz, I_{CQ} = 25 mA)	$IMD_{(d3)}$	—	–35	–30	dB
Load Mismatch (V_{CC} = 28 Vdc, P_{out} = 25 W (PEP), f1 = 30 MHz, f2 = 30.001 MHz, I_{CQ} = 25 mA, VSWR 30:1 at All Phase Angles)	ψ	No Degradation in Output Power			
CLASS A PERFORMANCE					
Intermodulation Distortion (2) and Power Gain (V_{CC} = 28 Vdc, P_{out} = 8.0 W (PEP), f1 = 30 MHz, f2 = 30.001 MHz, I_{CQ} = 1.2 Adc)	G_{PE} $IMD_{(d3)}$ $IMD_{(d5)}$	— — —	23.5 –40 –55	— — —	dB


NOTE:
2. To Mil–Std–1311 Version A, Test Method 2204B, Two Tone, Reference each Tone.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

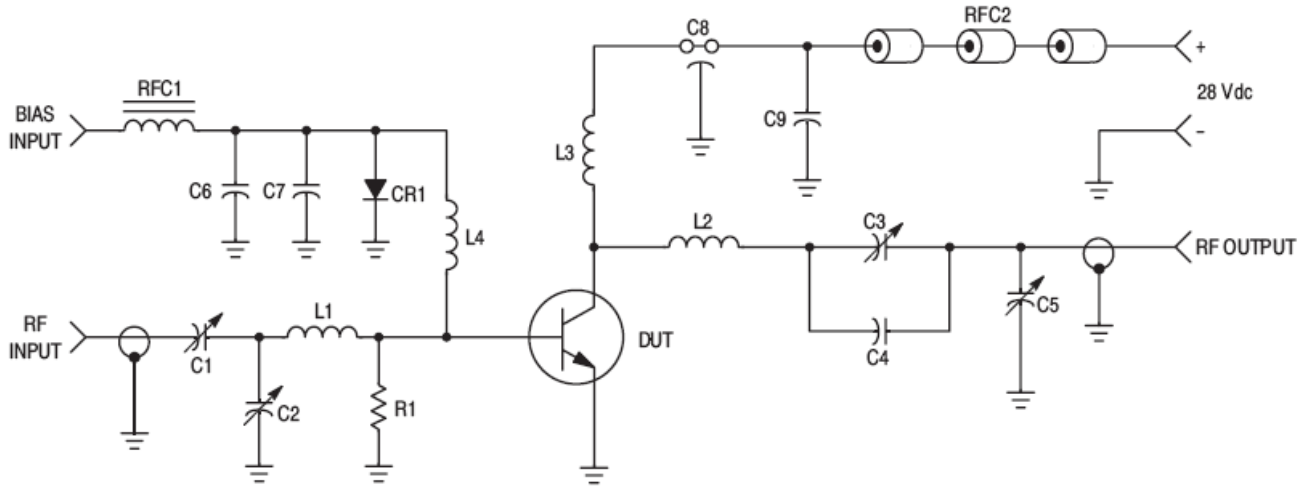

C1, C2 — ARCO 469, 190–780 pF
C3, C4 — ARCO 464, 25–280 pF
C5 — 120 pF Dipped Mica
C6, C7 — 100 µF, 15 Vdc
C8 — 680 pF F.T. Allen Bradley
C9 — 1.0 µF 35 V Tantalum
CR1 — 1N4997

L1 — 3 Turns #16 0.25″ ID
L2 — 6 Turns #16 0.5″ ID
L3 — 7 Turns #20 0.38″ ID
L4 — 10 µH Molded Choke Delevan
RFC1 — Ferroxcube VK200/20–4B
RFC2 — 3–Ferroxcube 5653065–3B
RF — Input/Output Connectors UG53 A/µ
R1 — 10 Ω 1/2 Watt 10%

Adjust Bias (Base) for I_{CQ} = 20 mA with No RF Applied

Figure 1. 30 MHz Linear Test Circuit

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
  Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

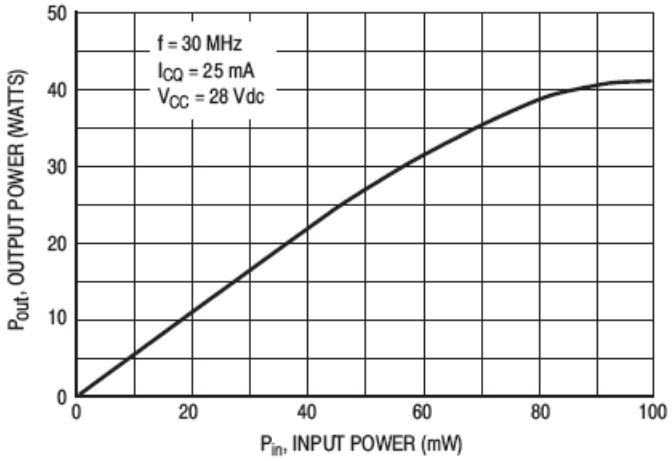


Figure 2. Output Power versus Input Power

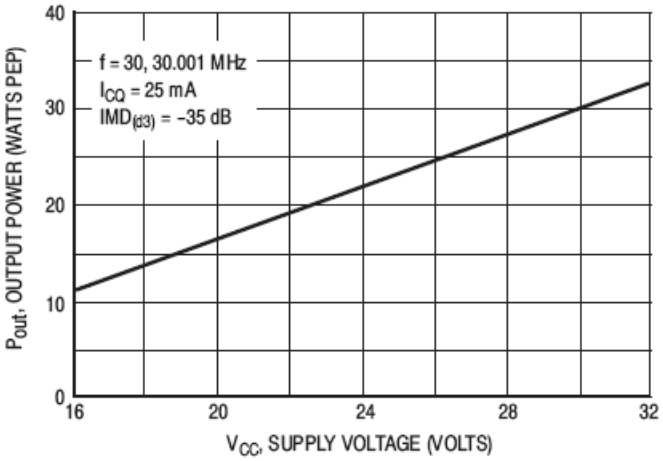


Figure 3. Output Power versus Supply Voltage

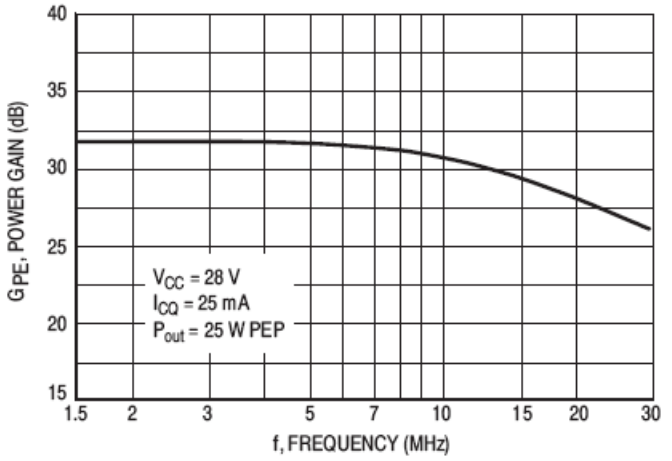


Figure 4. Power Gain versus Frequency

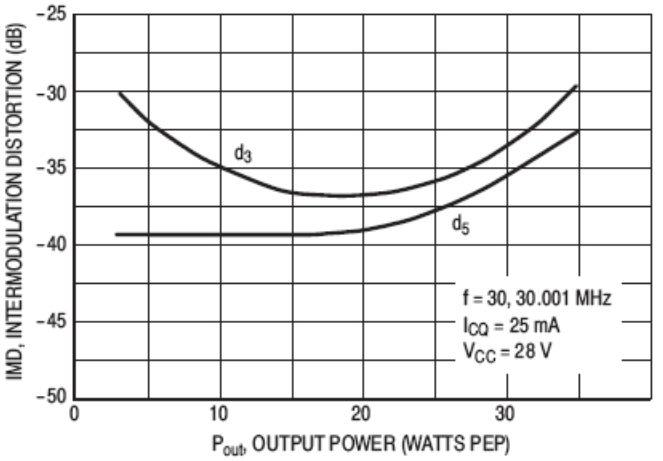


Figure 5. Intermodulation Distortion versus Output Power

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

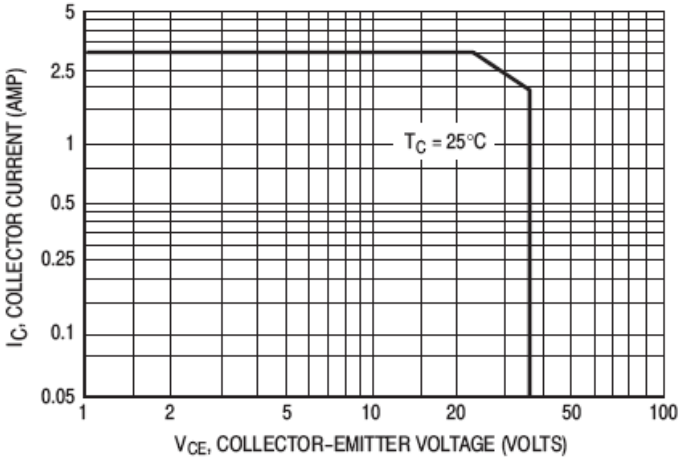


Figure 6. DC Safe Operating Area

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

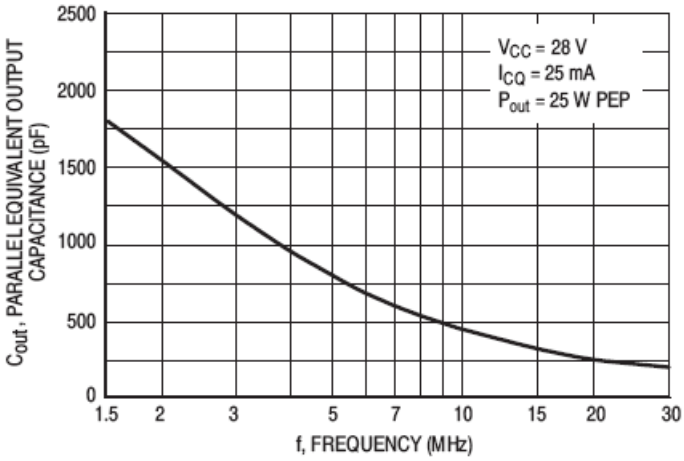


Figure 7. Output Capacitance versus Frequency


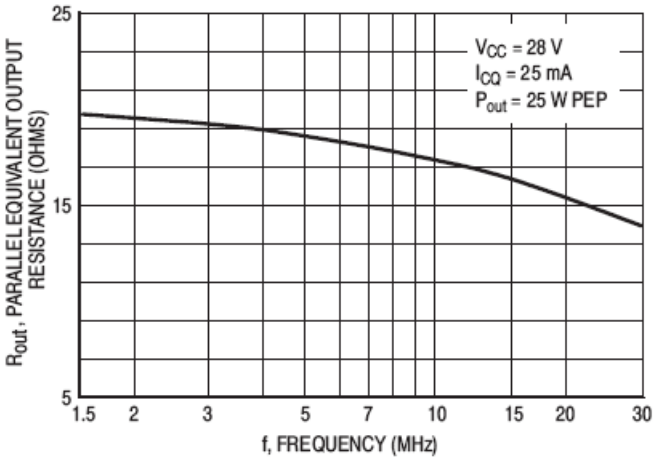


Figure 8. Output Resistance versus Frequency

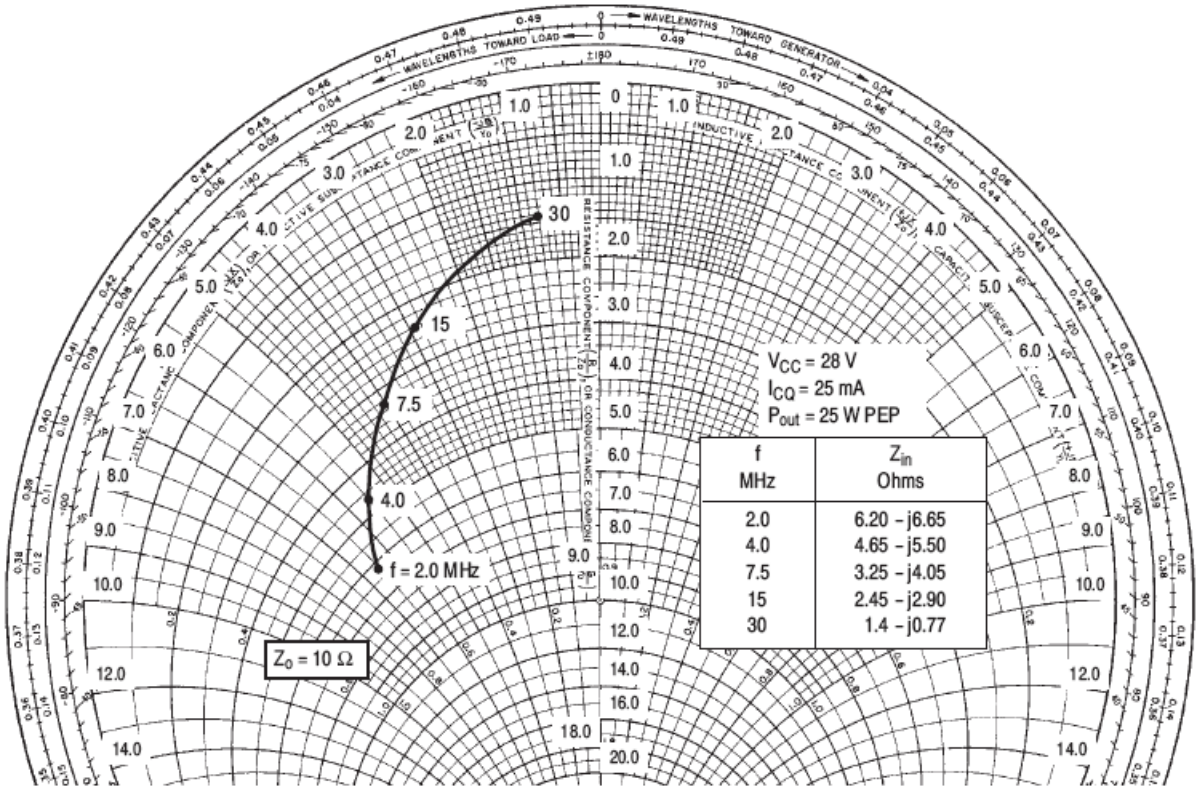

f MHz	Z_{in} Ohms
2.0	6.20 – j6.65
4.0	4.65 – j5.50
7.5	3.25 – j4.05
15	2.45 – j2.90
30	1.4 – j0.77


Figure 9. Series Equivalent Input Impedance

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

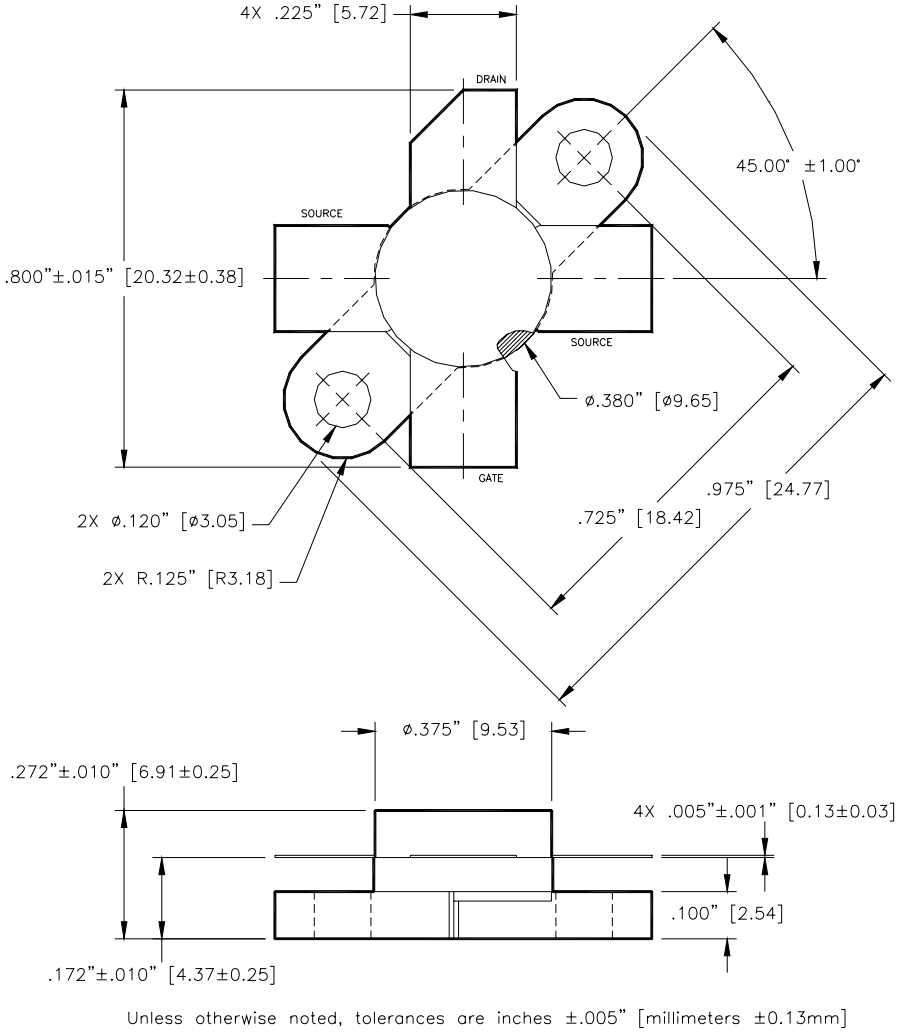

Unless otherwise noted, tolerances are inches ±.005" [millimeters ±0.13mm]

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.